

Ordering number: EN 3090

Monolithic Linear IC

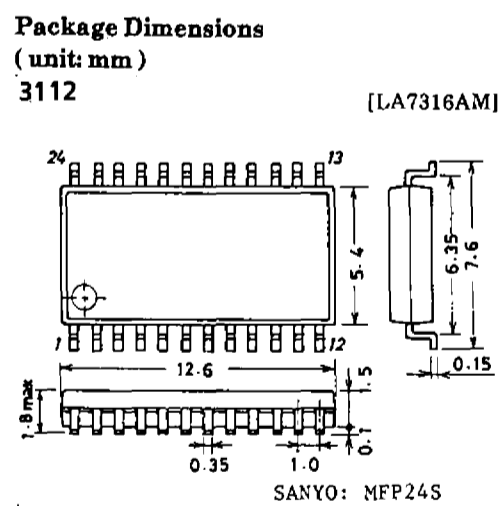
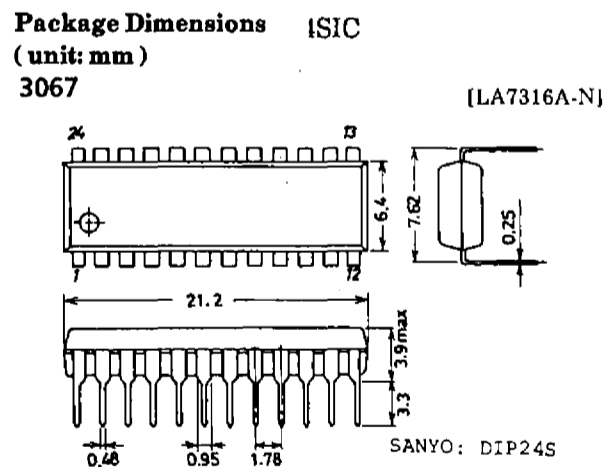
SANYO	No.3090	LA7316A-N,7316AM
		VCR VHS Chroma Signal Processor

The LA7316A-N,7316AM are VHS chroma signal processor ICs that have the following features.

1. Adjustment-free 3.58MHz VXO free-running OSC frequency, 160f_H VCO free-running OSC frequency, carrier leak, PB chroma level, except REC chroma level
2. The chip size is greatly reduced by using our most advanced process technology for fine structure. Since the LA7316A-N, 7316AM are designed for NTSC system, the package can be made so small as the DIP-24S and a minimum number of external parts is required and it occupies much less space on the board, thereby facilitating VCR set design.
3. Multifunction
2f_{SC} generator for CCD drive, PB chroma (629k) level compensation amp, function to select APC loop input signal passed/not passed through comb filter, BGP output, 3rd lock protector of 3.58MHz OSC
4. LPF usable for REC/PB
5. Capable of being operated from 5V supply
6. Current dissipation: 48mA at REC mode
50mA at PB mode

Maximum Ratings at Ta = 25°C				unit	
Maximum Supply Voltage	V _{CC} max			7.0	V
Allowable Power Dissipation	P _d max	Ta ≤ 65°C	LA7316A-N	400	mW
			LA7316AM	330	mW
Operating Temperature	T _{opr}			-10 to +65	°C
Storage Temperature	T _{stg}			-40 to +125	°C

Operating Conditions at Ta = 25°C				unit	
Recommended Supply Voltage	V _{CC}			5.2	V
Operating Voltage Range	V _{CC op}			4.8 to 5.5	V



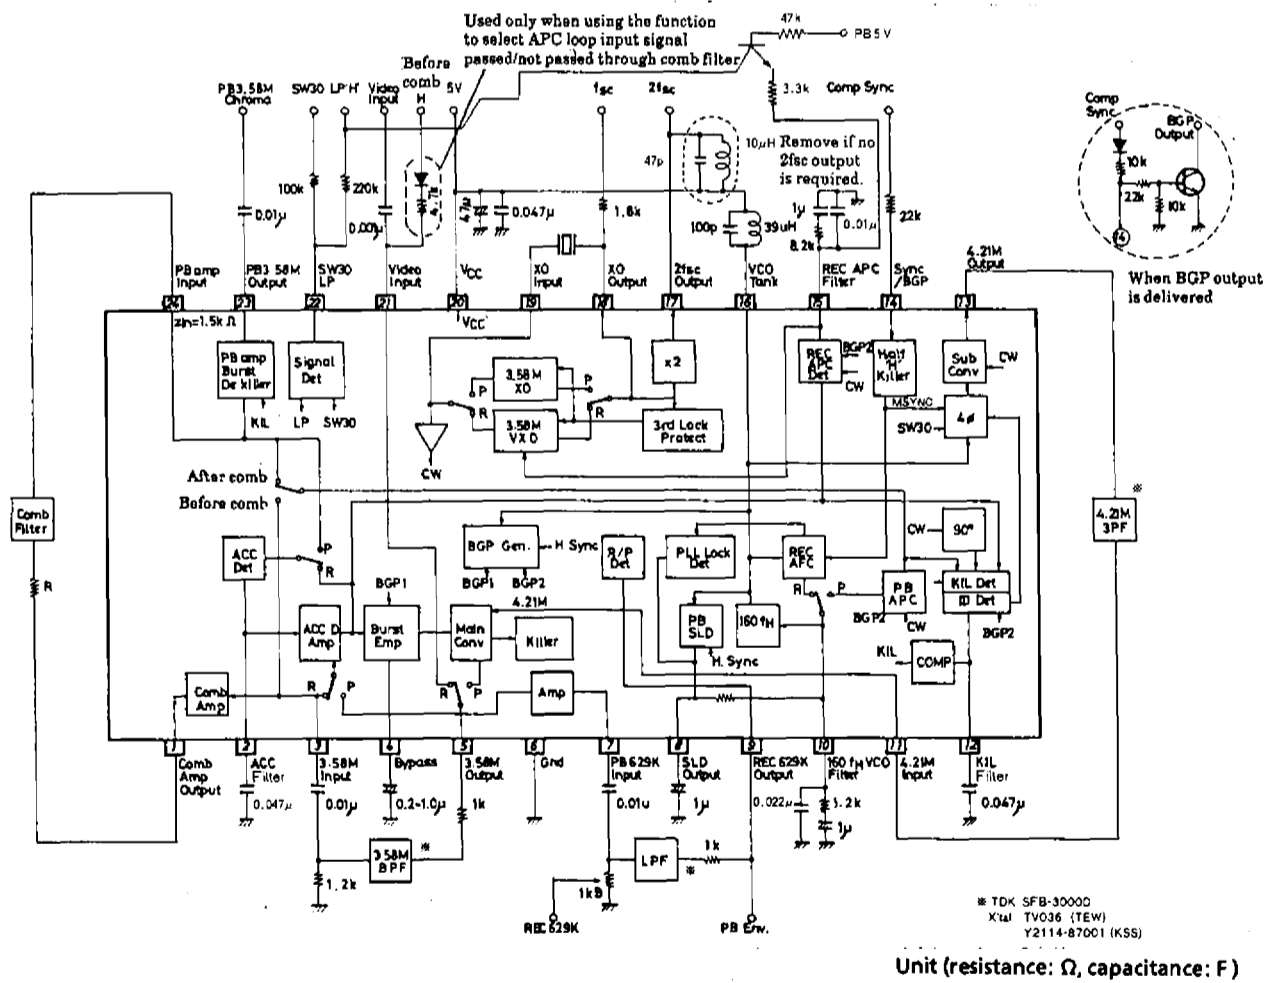
SANYO Electric Co., Ltd. Semiconductor Business Headquarters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

4219YT, TS No.3090-1/5

LA7316A-N, LA7316AM







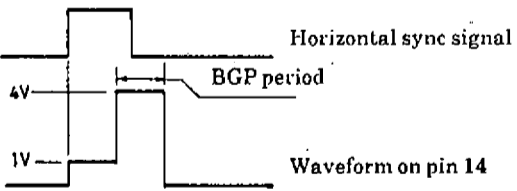
Operating Characteristics at Ta = 25°C, VCC = 5.0V				min	typ	max	unit
REC Current Dissipation	ICCR			38	48	58	mA
REC Output Level	VO(R)			210	300	390	mVpp
REC ACC Characteristics	ΔVO(R)	Input ± 6dB		-0.5	0	+0.5	dB
ACC Killer Input Level	VACK			-28	-25	-22	dB
VXO Control Sensitivity	SVXO			2.5	3.7	5.5	Hz/mV
VXO OSC Level	VXO(R)			0.65	0.85	1.00	Vpp
Subconverter Output Level	VSUB			200	250	300	mVpp
BGP Delay Time	tD				3.2		μs
BGP Width	tW				4.8		μs
REC APC Pull-in Range	ΔfAPC			± 350			Hz
REC AFC Pull-in Range	ΔfAFC			± 1.0			kHz
160fH VCO Control Sensitivity	SVCO			0.42	0.60	0.78	kHz/mV
PB Current Dissipation	ICCP			40	50	60	mA
PB Output Level	VO(P)			575	660	760	mVpp
PB ACC Characteristic	ΔVO(P)	Input ± 6dB		-0.5		+0.5	dB
PB Main Converter Carrier Leak	CL(P)	4.21MHz component		-40	-33		dB
PB XO Output Level	VXO(P)			520	650	800	mVpp
PB XO Free-running Frequency	fXO(f)	Difference from 3579545Hz		-7	0	+7	Hz
2fSC Output Amplitude	V2fsc			420	600	780	mVpp
Burst Emphasis Amount	GBE			5.5	6.0	6.5	dB
Burst De-emphasis Amount	GBD			-4.75	-4.5	-4.25	dB
Comb Amp Gain	GCOMB			11	13	15	dB

Equivalent Circuit Block Diagram and Sample Peripheral Circuit



LA7316A-N,LA7316AM


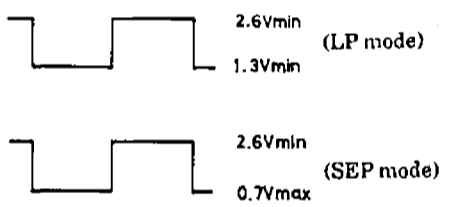

Pin Description

Pin No.	Function	Input/Output State	Remarks
1	COMB AMP OUT	E.F	Comb filter driver output 
2	ACC FILTER	Output 1kΩ	
3	3.58MHz IN	Input 10kΩ	3.58MHz BPF output is connected. 
4	BYPASS		Setting of DC bias of burst emphasis circuit 
5	3.58MHz OUT	E.F	REC mode : Video signal PB mode : Main converter output
6	GND		
7	PB 629kHz IN	Input 10kΩ	Signal is applied through LPF from PB preamp output at PB mode. 
8	SLD OUT		Compensation output is delivered when 160f _H VCO frequency deviates from specified frequency.
9	REC 629kHz OUT	E.F	Main converter output at REC mode. When pin 9 voltage is raised to 2.2V or greater, PB mode is entered.
10	160f _H VCO FILTER		REC mode : AFC referenced to horizontal sync signal PB mode : APC filter referenced to 3.58MHz OSC
11	4.21MHz IN	Input 1kΩ	Pin for inputting 4.21MHz for main converter. No matching resistor required. 
12	KIL FILTER		Color killer phase detector filter pin
13	4.21MHz OUT	Output 1kΩ	Subconverter output pin. Low spurious output because of operational type. No filter matching resistor required
14	SYNC IN/BGP OUT		Used for COMP, SYNC input/BGP output 

Continued on next page.

LA7316A-N,LA7316AM

Continued from preceding page.

Pin No.	Function	Input/Output State	Remarks
15	REC APC FILTER SP-EP/LP (PB)		REC mode : REC APC detector filter pin PB mode : When the current flows in, LP mode is entered.
16	VCO TANK		Pin for external tank circuit for 160f _H VCO OSC
17	2fsc OUT		CCD drive clock 2fsc output pin. LC are connected for spurious output and stray capacitance compensation. If no 2fsc output is required, this pin is left open or connected to V _{CC} .
18	XO OUT	E.F	Crystal OSC crystal drive output pin. Supplies fsc to servo circuit through resistor. 
19	XO IN	Input 1.5kΩ at REC mode 500Ω at PB mode	Signal which passed through crystal is applied. OSC is provided separately for REC/PB mode. No free-running frequency adjustment required at PB mode.
20	V _{CC}		Power supply pin
21	VIDEO IN	Input/Output 15kΩ	Video signal is applied at REC mode. By pulling up to V _{CC} using 4.7kΩ and diode, APC loop at PB mode can be supplied to phase detector from before comb filter.
22	SW30 IN SP-EP/LP (REC)	Base input	SW30 input. Threshold is set to 1/2V _{CC} . When lowest voltage of pulse drops to 0.7V or less, SEP mode is entered; and when raised to 1.3V or greater, LP mode is entered. 
23	PB 3.58MHz OUT	E.F	PB chroma output to be applied to YC-MIX circuit 
24	PB AMP IN	Input 1.5kΩ	Signal which passed through comb filter is applied.

LA7316A-N, LA7316AM

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.