



LH0033/LH0033A/LH0033C/LH0033AC/LH0063/LH0063C Fast and Ultra Fast Buffer Amplifiers

General Description

The LH0033/LH0033A and LH0063 are high speed, FET input, voltage follower/buffers designed to provide high current drive at frequencies from DC to over 100 MHz. The LH0033/LH0033A will provide ± 10 mA into 1 k Ω loads (± 100 mA peak) at slow rates of 1500V/ μ s. The LH0063 will provide ± 250 mA into 50 Ω loads (± 500 mA peak) at slow rates up to 6000V/ μ s. In addition, both exhibit excellent phase linearity up to 20 MHz.

Both are intended to fulfill a wide range of buffer applications such as high speed line drivers, video impedance transformation, nuclear instrumentation amplifiers, op amp isolation buffers for driving reactive loads and high impedance input buffers for high speed A to Ds and comparators. In addition, the LH0063 can continuously drive 50 Ω coaxial cables or be used as a yoke driver for high resolution CRT displays. For additional applications information, see AN-48.

These devices are constructed using specially selected junction FETs and active laser trimming to achieve guaranteed performance specifications. The LH0033/LH0033A and LH0063 are specified for operation from -55°C to $+125^{\circ}\text{C}$; whereas, the LH0033C/LH0033AC and LH0063C are specified from -25°C to $+85^{\circ}\text{C}$. The LH0033/

LH0033A is available in either a 1.5W metal TO-8 package or an 8-pin ceramic dual-in-line package. The LH0063 is available in a 5W 8-pin TO-3 package.


Features

- Ultra fast (LH0063): 6000 V/ μ s
- Wide range single or dual supply operation
- Wide power bandwidth: DC to 100 MHz
- High output drive: ± 10 V with 50 Ω load
- Low phase non-linearity: 2 degrees
- Fast rise times: 2 ns
- High current gain: 120 dB
- High input resistance: $10^{10}\Omega$

Advantages


- Only 10V supply needed for 5 Vp-p video out
- Speed does not degrade system performance
- Wide data rate range for phase encoded systems
- Output drive adequate for most loads
- Single pre-calibrated package

Connection Diagrams




TL/K/5507-1

Case is electrically isolated



TL/K/5507-2




TL/K/5507-3

Case is electrically isolated

Order Number LH0033G, LH0033AG, LH0033CG,
LH0033ACG, LH0063K, LH0063CK,
LH0033J or LH0033CJ
See NS Package Number G12B, HY08A or K08A

Leadless Chip Carrier



TL/K/5507-27

Order Number LH0033E
See NS Package Number E48B

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications. (Notes 5 & 7)

Supply Voltage ($V^+ - V^-$)	40V
Maximum Power Dissipation (See Curves)	
LH0063/LH0063C	5W
LH0033A/LH0033AC/LH0033/LH0033C	1.5W
Maximum Junction Temperature	175°C
Input Voltage	$\pm V_S$
Continuous Output Current	
LH0063/LH0063C	± 250 mA
LH0033A/LH0033AC/LH0033/LH0033C	± 100 mA

Peak Output Current	
LH0063/LH0063C	± 500 mA
LH0033A/LH0033AC/ LH0033/LH0033C	± 250 mA
Operating Temperature Range	
LH0033A/LH0033 and LH0063	-55°C to +125°C
LH0033AC/LH0033C and LH0063C	-25°C to +85°C
Storage Temperature Range	-65° to +150°C
Lead Temp. (Soldering, 10 seconds)	300°C
ESD rating to be determined.	

DC Electrical Characteristics $V_S = \pm 15V$, $T_{MIN} \leq T_A \leq T_{MAX}$, unless otherwise specified, (Note 1)

Parameter	Conditions	LH0033A			LH0033AC			LH0033			LH0033C			Units
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
Output Offset Voltage	$R_S = 100\Omega$, $T_J = 25^\circ\text{C}$, $V_{IN} = 0V$ (Note 2) $R_S = 100\Omega$		1	5		6	15		5.0	10		12	20	mV
				10			20			15			25	mV
Average Temperature Coefficient of Offset Voltage	$R_S = 100\Omega$, $V_{IN} = 0V$ (Note 3)		50	100		50	100		50	100		50	100	$\mu\text{V}/^\circ\text{C}$
Input Bias Current	$V_{IN} = 0V$ $T_J = 25^\circ\text{C}$ (Note 2) $T_A = 25^\circ\text{C}$ (Note 4) $T_J = T_A = T_{MAX}$			100 1.5 7.5			250 2.5 10			250 2.5 10			500 5.0 20	pA nA nA
Voltage Gain	$V_O = \pm 10V$, $R_S = 100\Omega$, $R_L = 1.0k\Omega$	0.97	0.98	1.00	0.96	0.98	1.00	0.97	0.98	1.00	0.96	0.98	1.00	V/V
Input Impedance	$R_L = 1k\Omega$	10^{10}	10^{11}		10^{10}	10^{11}		10^{10}	10^{11}		10^{10}	10^{11}		Ω
Output Impedance	$V_{IN} = \pm 1.0V$, $R_L = 1.0k$		6.0	10		6.0	10		6.0	10		6.0	10	Ω
Output Voltage Swing	$V_I = \pm 14V$, $R_L = 1.0k$ $V_I = \pm 10.5V$, $R_L = 100\Omega$, $T_A = 25^\circ\text{C}$	± 12			± 12			± 12			± 12			V
		± 9.0			± 9.0			± 9.0			± 9.0			V
Supply Current	$V_{IN} = 0V$ (Note 5)	20	22		21	24		20	22		21	24		mA
Power Consumption	$V_{IN} = 0V$		600	660		630	720		600	660		630	720	mW

AC Electrical Characteristics $T_J = 25^\circ\text{C}$, $V_S = \pm 15V$, $R_S = 50\Omega$, $R_L = 1.0k\Omega$ (Note 6)

Parameter	Conditions	LH0033A			LH0033AC			LH0033			LH0033C			Units
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
Slew Rate	$V_{IN} = \pm 10V$	1000	1500		1000	1400		1000	1500		1000	1400		V/ μs
Bandwidth	$V_{IN} = 1.0$ Vrms		100			100			100			100		MHz
Phase Non-Linearity	$BW = 1.0\text{Hz}$ to 20 MHz		2.0			2.0			2.0			2.0		degrees
Rise Time	$\Delta V_{IN} = 0.5V$		2.9			3.2			2.9			3.2		ns
Propagation Delay	$\Delta V_{IN} = 0.5V$		1.2			1.5			1.2			1.5		ns
Harmonic Distortion	$f > 1$ kHz		<0.1			<0.1			<0.1			<0.1		%

Note 1: LH0033 and LH0033A are 100% production tested as specified at 25°C, 125°C, and -55°C. LH0033AC/C are 100% production tested at 25°C only. Specifications at temperature extremes are verified by sample testing, but these limited are not used to calculate outgoing quality level.

Note 2: Specification is at 25°C junction temperature due to requirements of high speed automatic testing. Actual values at operating temperature will exceed the value at $T_J = 25^\circ\text{C}$. When supply voltages are $\pm 15V$, no-load operating junction temperature may rise 40-60°C above ambient, and more under load conditions. Accordingly, V_{OS} may change one to several mV, and I_B will change significantly during warm-up. Refer to I_B vs temperature graph for expected values.

Note 3: LH0033 and LH0033A are 100% production tested for this parameter. LH0033AC/C are sample tested only. Limits are not used to calculate outgoing quality levels. $\Delta V_{OS}/\Delta T$ is the average value calculated from measurements at 25°C and T_{MAX} .

Note 4: Measured in still air 7 minutes after application of power. Guaranteed through correlated automatic pulse testing.

Note 5: Guaranteed through correlated automatic pulse testing at $T_J = 25^\circ\text{C}$.

Note 6: Not 100% production tested; verified by sample testing only. Limits are not used to calculate outgoing quality level.

Note 7: Refer to RETS0033AG for the LH0033AG and RETS0033G for the LH0033G military specifications.

DC Electrical Characteristics $V_S = \pm 15V$, $T_{MIN} \leq T_A \leq T_{MAX}$ unless otherwise specified (Note 1)

Parameter	Conditions	LH0063			LH0063C			Units
		Min	Typ	Max	Min	Typ	Max	
Output Offset Voltage	$R_S \leq 100k\Omega$, $T_J = 25^\circ C$, $R_L = 100\Omega$ (Note 2)		10	25		10	50	mV
				100			100	mV
Average Temperature Coefficient of Output Offset Voltage	$R_S \leq 100k\Omega$		300			300		$\mu V/^\circ C$
Input Bias Current	$T_J = 25^\circ C$ (Note 2)		10	30		10	30	nA
				100			100	nA
Voltage Gain	$V_{IN} = \pm 10V$, $R_S \leq 100k\Omega$, $R_L = 1k\Omega$	0.94	0.96	1.0	0.94	0.96	1.0	V/V
Voltage Gain	$V_{IN} = \pm 10V$, $R_S \leq 100k\Omega$, $R_L = 50\Omega$, $T_J = 25^\circ C$	0.92	0.93	0.98	0.91	0.93	0.98	V/V
Input Capacitance	Case Shorted to Output		8.0			8.0		pF
Output Impedance	$V_{OUT} = \pm 10V$, $R_S \leq 100k\Omega$, $R_L = 50\Omega$		1.0	4.0		1.0	4.0	Ω
Output Current Swing	$V_{IN} = \pm 10V$, $R_S \leq 100k\Omega$	0.2	0.25		0.2	0.25		A
Output Voltage Swing	$R_L = 50\Omega$	± 10	± 13		± 10	± 13		V
Output Voltage Swing	$V_S = \pm 5.0V$, $R_L = 50\Omega$, $T_J = 25^\circ C$	5.0	7.0		5.09	7.0		Vp-p
Supply Current	$T_J = 25^\circ C$, $R_L = \infty$, $V_S = \pm 15V$ (Note 3)		35	65		35	65	mA
Supply Current	$V_S = \pm 5.0V$ (Note 3)		50			50		mA
Power Consumption	$T_J = 25^\circ C$, $R_L = \infty$, $V_S = \pm 15V$		1.05	1.95		1.05	1.95	W
Power Consumption	$V_S = \pm 5.0V$		500			500		mW

AC Electrical Characteristics $T_J = 25^\circ C$, $V_S = \pm 15V$, $R_S = 50\Omega$, $R_L = 50\Omega$ (Note 4)

Parameter	Conditions	LH0063			LH0063C			Units
		Min	Typ	Max	Min	Typ	Max	
Slew Rate	$R_L = 1.0k\Omega$, $V_{IN} = \pm 10V$		6000			6000		$V/\mu s$
Slew Rate	$R_L = 50\Omega$, $V_{IN} = \pm 10V$, $T_J = 25^\circ C$	2000	2400		2000	2400		$V/\mu s$
Bandwidth	$V_{IN} = 1.0V_{rms}$		200			200		MHz
Phase Non-Linearity	$BW = 1.0Hz$ to $20MHz$		2.0			2.0		degrees
Rise Time	$\Delta V_{IN} = 0.5V$		1.6			1.9		ns
Propagation Delay	$\Delta V_{IN} = 0.5V$		1.9			2.1		ns
Harmonic Distortion			<0.1			<0.1		%

Note 1: LH0063 is 100% production tested as specified at $25^\circ C$, $125^\circ C$, and $-55^\circ C$. LH0063C is 100% production tested at $25^\circ C$ only. Specifications at temperature extremes are verified by sample testing, but these limits are not used to calculate outgoing quality level.

Note 2: Specification is at $25^\circ C$ junction temperature due to requirements of high speed automatic testing. Actual values at operating temperature will exceed the value at $T_J = 25^\circ C$. When supply voltages are $\pm 15V$, no-load operating junction temperature may rise $40-60^\circ C$ above ambient, and more under load conditions. Accordingly, V_{OS} may change one to several mV, and I_B and I_{OS} will change significantly during warm-up. Refer to I_B and I_{OS} vs temperature graph for expected values.


Note 3: Guaranteed through correlated automatic pulse testing at $T_J = 25^\circ C$.

Note 4: Not 100% production tested; verified by sample testing only. Limits are not used to calculate outgoing quality level.


Note 5: Refer to RETS0063K for the LH0063K military specifications.

Typical Performance Characteristics


LH0033 Power Dissipation




LH0063 Power Dissipation




LH0063 DC Safe Operating Area




LH0033 Supply Current vs Supply Voltage




LH0063 Supply Current vs Supply Voltage




LH0033 Output Voltage vs Supply Voltage




LH0063 Output Voltage vs Supply Voltage




LH0033 Negative Pulse Response




LH0033 Positive Pulse Response




LH0033 Frequency Response



LH0033 Rise and Fall Time vs Temperature




LH0063 Large Signal Pulse Response




Typical Performance Characteristics (Continued)


LH0033 Input Bias Current vs Temperature




LH0063 Input Current




LH0063 Frequency Response




LH0033 Normalized Input Bias Current During Warm-Up



LH0063 Small Signal Rise Time



LH0033 Input Bias Current vs Input Voltage



TL/K/5507-5


Application Hints

RECOMMENDED LAYOUT PRECAUTIONS

RF/video printed circuit board layout rules should be followed when using the LH0033 and LH0063 since they will provide power gain to frequencies over 100 MHz. Ground planes are recommended and power supplies should be decoupled at each device with low inductance capacitors. In addition, ground plane shielding may be extended to the metal case of the device since it is electrically isolated from internal circuitry. Alternatively the case should be connected to the output to minimize input capacitance.


OFFSET VOLTAGE ADJUSTMENT

Both the LH0033's and LH0063's offset voltages have been actively trimmed by laser to meet guaranteed specifications when the offset preset pin is shorted to the offset adjust pin. This pre-calibration allows the devices to be used in most DC or AC applications without individually offset nulling each device. If offset null is desirable, it is simply obtained by leaving the offset preset pin open and connecting a trim pot of 100Ω for the LH0033 or 1 kΩ for the LH0063 between the offset adjust pin and V^- , as illustrated in Figures 1 and 2.



TL/K/5507-6

FIGURE 1. Offset Zero Adjust for LH0033 (Pin numbers shown for TO-8)



TL/K/5507-7

FIGURE 2. Offset Zero Adjust for LH0063

Application Hints (Continued)

OPERATION FROM SINGLE OR ASYMMETRICAL POWER SUPPLIES

Both device types may be readily used in applications where symmetrical supplies are unavailable or not desirable. A typical application might be an interface to a MOS shift register where $V^+ = +5V$ and $V^- = -12V$. In this case, an apparent output offset occurs due to the device's voltage gain of less than unity. This additional output offset error may be predicted by:

$$\Delta V_O \approx (1 - A_V) \frac{(V^+ - V^-)}{2} = 0.005(V^+ - V^-)$$

where:

A_V = No load voltage gain, typically 0.99

V^+ = Positive supply voltage

V^- = Negative supply voltage

For the above example, ΔV_O would be $-35mV$. This may be adjusted to zero as described in *Figure 2*. For AC coupled applications, no additional offset occurs if the DC input is properly biased as illustrated in the Typical Applications section.

SHORT CIRCUIT PROTECTION


In order to optimize transient response and output swing, output current limit has been omitted from the LH0033 and LH0063. Short circuit protection may be added by inserting appropriate value resistors between V^+ and V_{C^+} pins and V^- and V_{C^-} pins as illustrated in *Figures 3 and 4*. Resistor values may be predicted by:

$$R_{LIM} \equiv \frac{V^+}{I_{SC}} = \frac{V^-}{I_{SC}}$$

where:


$I_{SC} \leq 100 \text{ mA}$ for LH0033

$I_{SC} \leq 250 \text{ mA}$ for LH0063

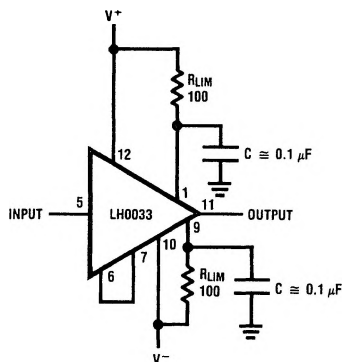

TL/K/5507-8

FIGURE 3. LH0033 Using Resistor Current Limiting

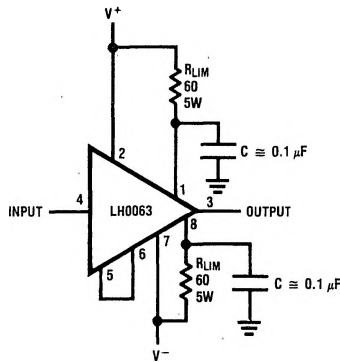


TL/K/5507-9

FIGURE 4. LH0063 Using Resistor Current Limiting


Typical Applications (Continued)

Gamma Ray Pulse Integrator

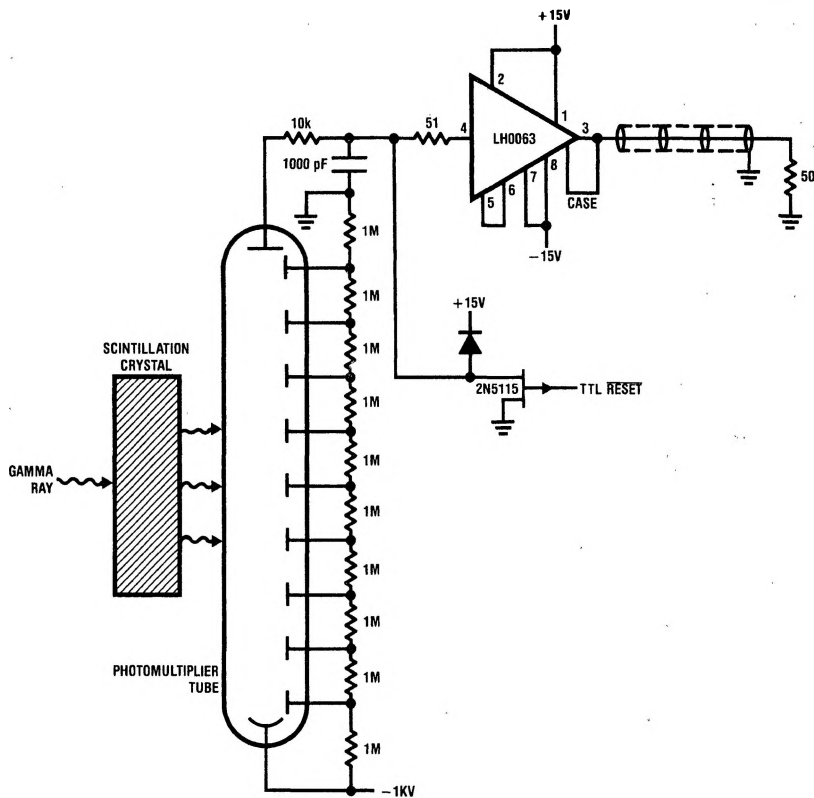


TL/K/5507-15

Nuclear Particle Detector

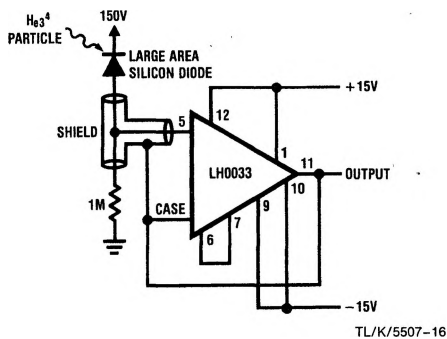

TL/K/5507-16


High Input Impedance AC Coupled Amplifier

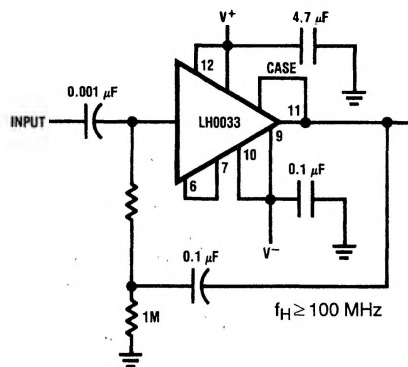


TL/K/5507-17

Typical Applications (Continued)


Isolation Buffer

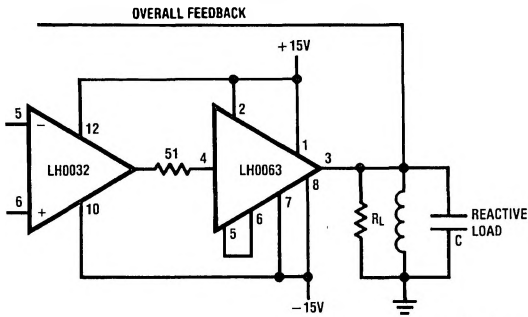

Coaxial Cable Driver

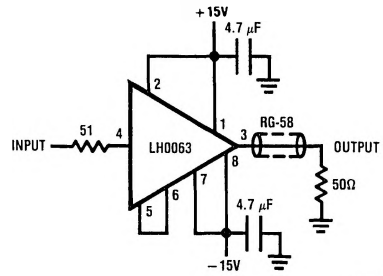


Coaxial Cable Driver

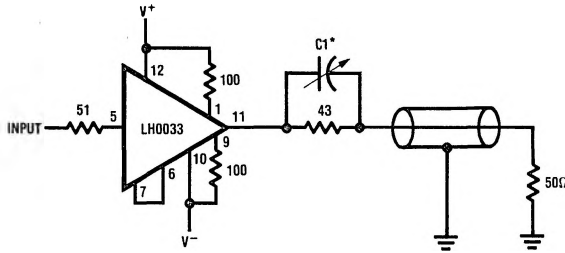


*Select C1 for optimum pulse response

High Input Impedance Comparator with Offset Adjust

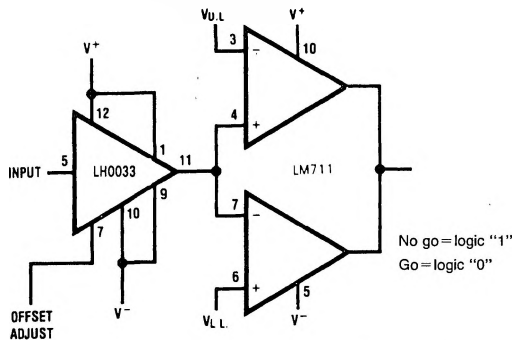


Instrumentation Shield/Line Driver

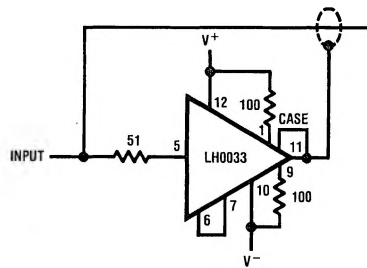


Typical Applications (Continued)

1W CW Final Amplifier

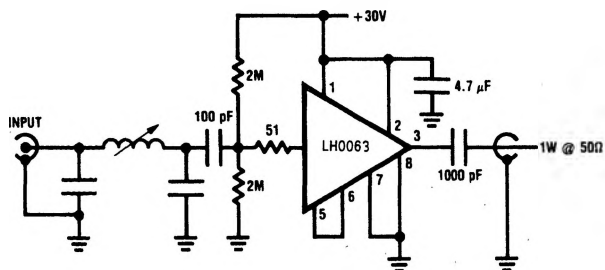


TL/K/5507-23

Single Supply AC Amplifier

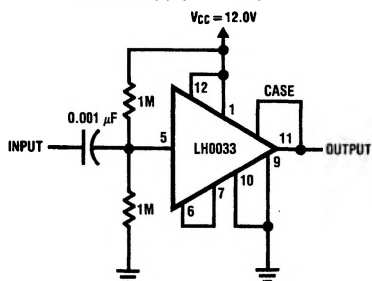


TL/K/5507-24

4.5 MHz Notch Filter

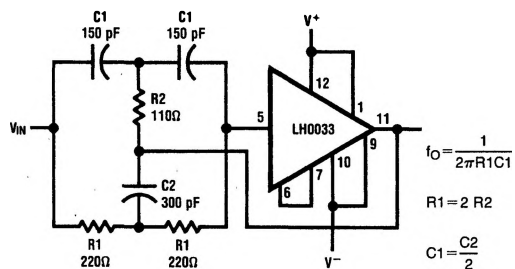

TL/K/5507-25

High Speed Sample and Hold

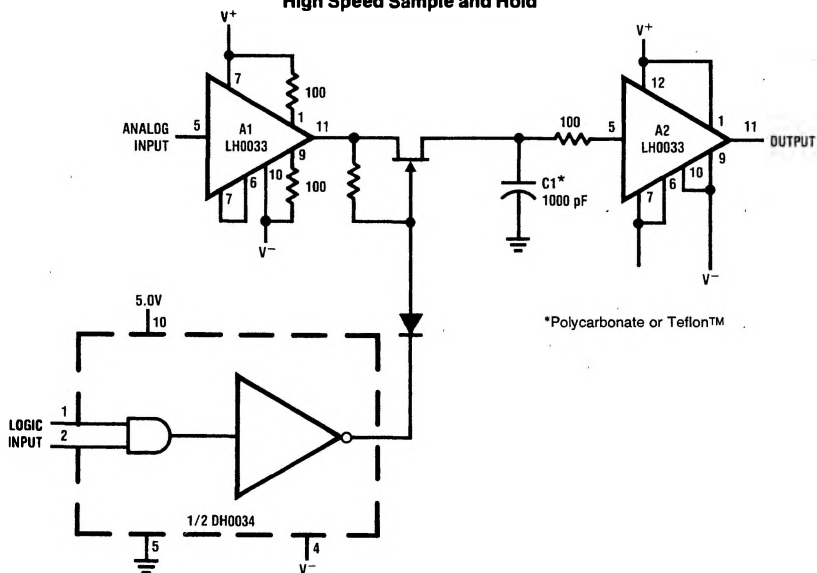

*Polycarbonate or Teflon™

TL/K/5507-26