

PQ30RV31

Variable Output Low Power-Loss Voltage Regulator

Features


- Maximum output current: 3A
- Compact resin full-mold package
- Low power-loss(Dropout voltage: MAX.0.5V)
- Variable output voltage(setting range: 1.5 to 30V)
- Built-in ON/OFF control function.

Applications

- Power supply for print concentration control of word processors
- Series power supply for motors and solenoid
- Series power supply for VCRs and TVs

Outline Dimensions

(Unit : mm)

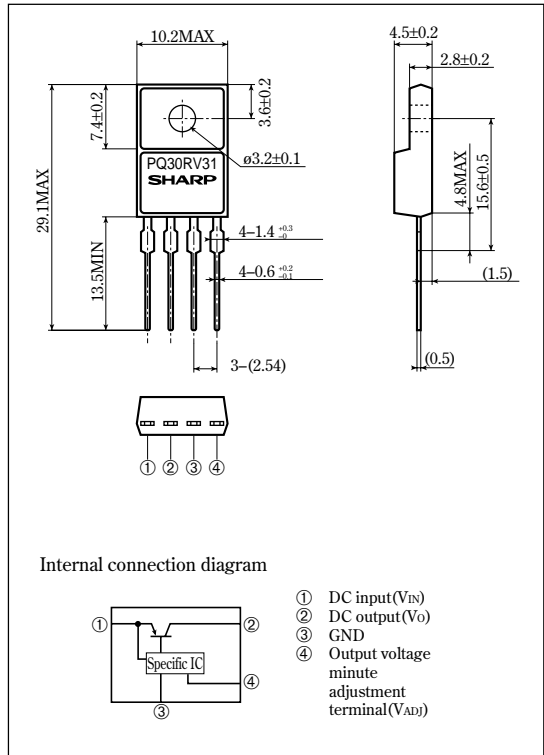

Absolute Maximum Ratings

($T_a=25^\circ\text{C}$)

Parameter	Symbol	Rating	Unit
① Input voltage	V_{IN}	35	V
① Output adjustment terminal voltage	V_{ADJ}	7	V
Output current	I_O	3	A
Power dissipation(No heat sink)	P_{D1}	2.0	W
Power dissipation(With infinite heat sink)	P_{D2}	20	W
② Junction temperature	T_j	150	$^\circ\text{C}$
Operating temperature	T_{opr}	-20 to +80	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 to +150	$^\circ\text{C}$
Soldering temperature	T_{sol}	260 (For 10s)	$^\circ\text{C}$

① All are open except GND and applicable terminals.

② Overheat protection function may operate at $125 \leq T_j \leq 150^\circ\text{C}$.

•Please refer to the chapter " Handling Precautions ".

SHARP


Electrical Characteristics

(Unless otherwise specified, condition shall be $V_{IN}=12V$, $V_O=10V$, $I_O=1.5A$, $R_1=390\Omega$, $T_a=25^\circ C$)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input voltage	V_{IN}	—	4.5	—	35	V
output voltage	V_O	—	1.5	—	30	V
Load regulation	R_{regL}	$I_O=5mA$ to 3A	—	0.5	2.0	%
Line regulation	R_{regI}	$V_{IN}=11$ to 21V, $I_O=0.5mA$	—	0.5	2.5	%
Ripple rejection	RR	Refer to Fig. 2	45	70	—	dB
Reference voltage	V_{ref}	—	1.225	1.25	1.275	V
Temperature coefficient of reference voltage	$T_c V_{ref}$	$T_j=0$ to $125^\circ C$, $I_O=5mA$	—	± 1.0	—	%/ $^\circ C$
Dropout voltage	V_{I-O}	*3 , $I_O=3A$	—	0.3	1.0	V
		*3 , $I_O=2A$	—	0.2	0.5	
Quiescent current	I_q	$I_O=0$	—	—	7	mA

*3 Input voltage shall be the value when output voltage is 95% in comparison with the initial value.


Fig. 1 Test Circuit

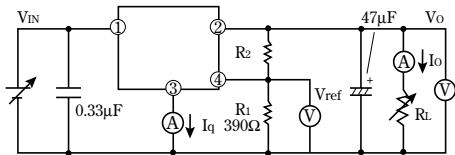

$$V_O = V_{ref} \times \left(1 + \frac{R_2}{R_1} \right)$$


[$R_1=390\Omega$, V_{ref} Nearly=1.25V]

Fig. 2 Test Circuit of Ripple Rejection

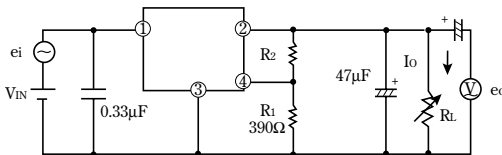

$I_O=0.5A$, $V_{IN}=12V$, $V_O=10V$
 $f=120Hz$ (sine wave)
 $e_i(rms)=0.5Vrms$
 $RR=20 \log(e_i(rms)/e_o(rms))$

Fig. 3 Power Dissipation vs. Ambient Temperature

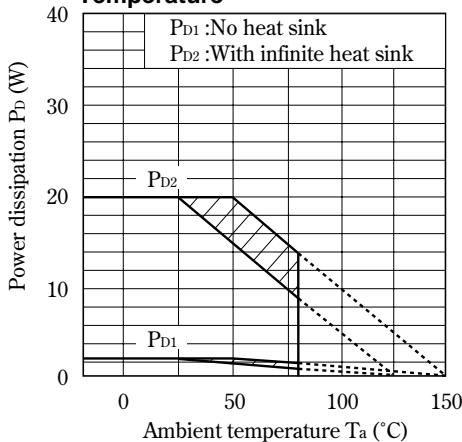

Note) Oblique line portion : Overheat protection may operate in this area.

Fig. 4 Overcurrent Protection Characteristics (Typical Value)

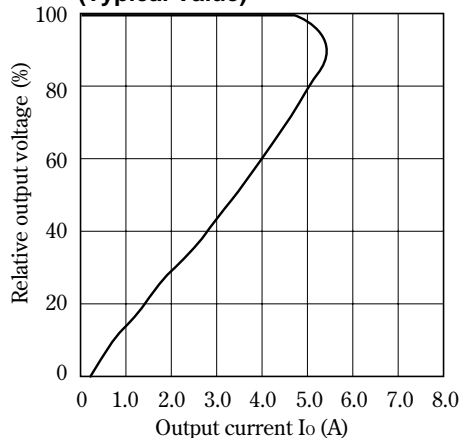


Fig. 5 Output Voltage Adjustment Characteristics (Typical value)

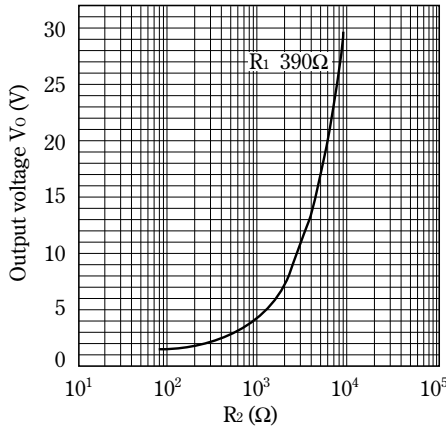


Fig. 6 Output Voltage vs. Input Voltage

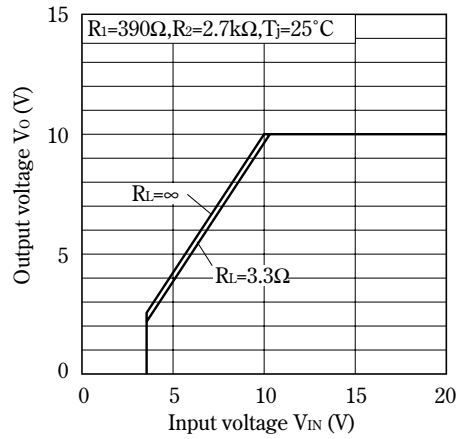


Fig. 7 Dropout Voltage vs. Junction Temperature

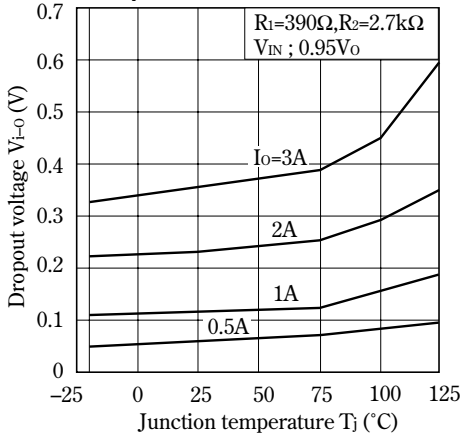


Fig. 8 Ripple Rejection vs. Input Ripple Frequency

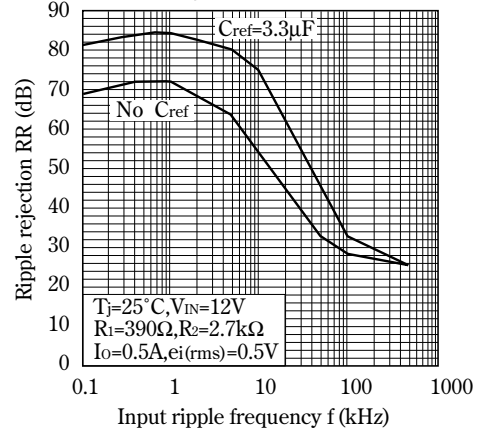


Fig. 9 Ripple Rejection vs. Output Current

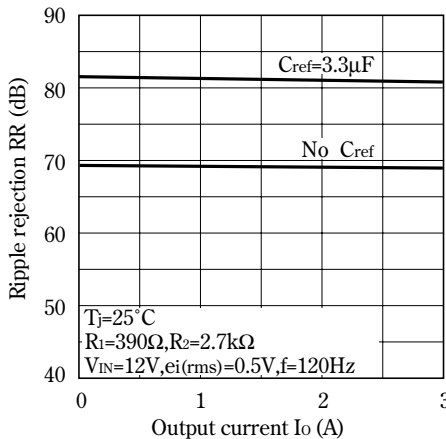


Fig.10 Output Peak Current vs. Dropout Voltage (Typical value)




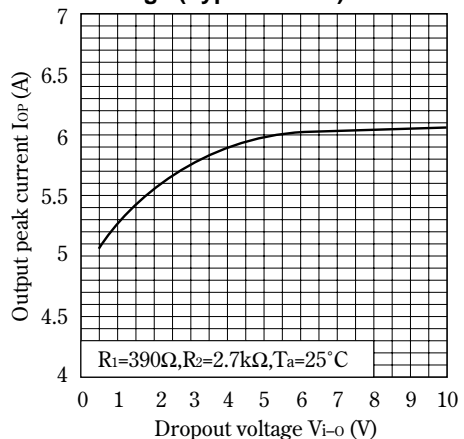


Fig.11 Ripple Rejection vs. Input Ripple Frequency

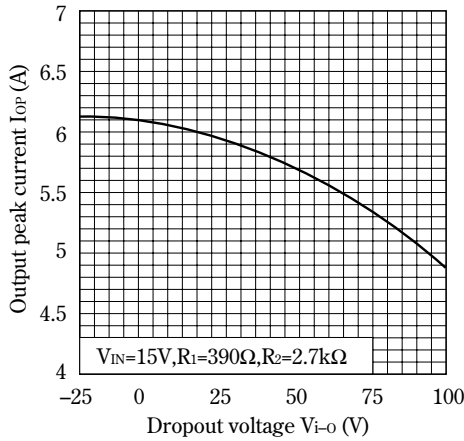

ON/OFF Operation

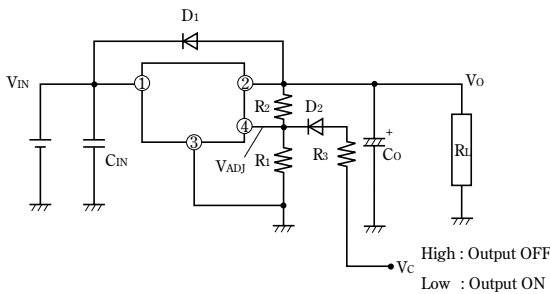

- ON/OFF operation is available by mounting externally D_2 and R_3 .
- When V_{ADJ} is forcibly raised above V_{REF} (1.25V TYP) by applying the external signal, the output is turned off (pass transistor of regulator is turned off). When the output is OFF, V_{ADJ} must be higher than $V_{REF MAX.}$, and at the same time must be lower than maximum rating 7V.

In OFF-state, the load current flows to R_L from V_{ADJ} through R_2 . Therefore the value of R_2 must be as high as possible.

• $V_{O'} = V_{ADJ} \times R_L / (R_L + R_2)$

occurs at the load. OFF-state equivalent circuit R_1 up to 10k Ω is allowed. Select as high value of R_L and R_2 as possible in this range. In some case, as output voltage is getting lower ($V_{O} < 1V$), impedance of load resistance rises. In such condition, it is sometime impossible to obtain the minimum value of $V_{O'}$. So add the dummy resistance indicated by R_D in the figure to the circuit parallel to the load.

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.