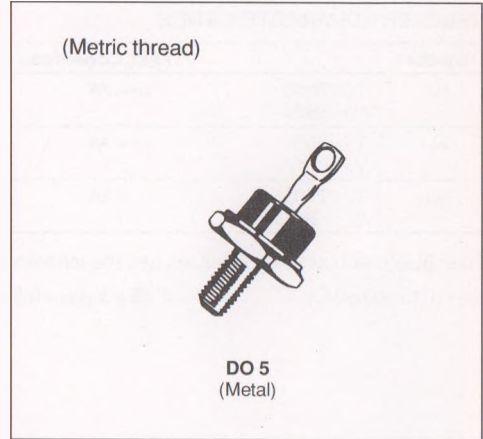


FAST RECOVERY RECTIFIER DIODES

- FAST RECOVERY TIME
- LOW FORWARD RECOVERY TIME
- HIGH SURGE CURRENT CAPABILITY
- AVAILABLE UP TO 600V

APPLICATIONS

- DC AND AC MOTOR CONTROL
- SWITCHMODE POWER SUPPLY
- HIGH FREQUENCY CHOPPERS
- HIGH FREQUENCY RECTIFIERS


ABSOLUTE RATINGS (limiting values)

| Symbol | Parameter | | Value | Unit |
|--------------------|--|----------------------------|-------------|------------|
| I_{FRM} | Repetitive Peak Forward Current | $t_p \leq 20\mu s$ | 500 | A |
| $I_F (AV)$ | Average Forward Current | $T_C = 90^\circ C$ | 60 | A |
| I_{FSM} | Surge non Repetitive Forward Current | $t_p = 10ms$ Sinusoidal | 800 | A |
| P_{Tot} | Power Dissipation | $T_C = 90^\circ C$ | 110 | W |
| T_{stg} T_j | Storage and Junction Temperature Range | | - 65 to 165 | $^\circ C$ |

| Symbol | Parameter | ESM 244- | | | | | | | Unit |
|-----------|---------------------------------|----------|-----|-----|-----|-----|-----|-----|------|
| | | 50 | 100 | 200 | 300 | 400 | 500 | 600 | |
| V_{RRM} | Repetitive Peak Reverse Voltage | 50 | 100 | 200 | 300 | 400 | 500 | 600 | V |

THERMAL RESISTANCE

| Symbol | Parameter | Value | Unit |
|---------------|---------------|-------|--------------|
| $R_{th(j-c)}$ | Junction-case | 0.7 | $^\circ C/W$ |

ELECTRICAL CHARACTERISTICS

STATIC CHARACTERISTICS

| Symbol | Test Conditions | | Min. | Typ. | Max. | Unit |
|--------|---------------------------|--------------------|------|------|------|------|
| I_R | $T_j = 100^\circ\text{C}$ | $V_R = V_{RRM}$ | | | 6 | mA |
| V_F | $T_j = 25^\circ\text{C}$ | $I_F = 60\text{A}$ | | | 1.5 | V |

RECOVERY CHARACTERISTICS

| Symbol | Test Conditions | | Min. | Typ. | Max. | Unit |
|----------|--|--|------|------|------|---------------|
| t_{rr} | $T_j = 25^\circ\text{C}$ $V_R = 30\text{V}$ | $I_F = 1\text{A}$ $di_F/dt = -15\text{A}/\mu\text{s}$ | | | 200 | ns |
| Q_{rr} | $T_j = 25^\circ\text{C}$ $V_R = 30\text{V}$ | $I_F = 1\text{A}$ $di_F/dt = -15\text{A}/\mu\text{s}$ | | | 0.3 | μC |
| I_{RM} | $T_j = 25^\circ\text{C}$ $V_R = 30\text{V}$ | $I_F = 1\text{A}$ $di_F/dt = -15\text{A}/\mu\text{s}$ | | | 3 | A |

To evaluate the conduction losses use the following equations :

$$V_F = 1.15 + 0.004 I_F \quad P = 1.15 \times I_{F(AV)} + 0.004 I_{F(RMS)}^2$$