

TOSHIBA PHOTO-INTERRUPTERS INFRARED LED + PHOTOTRANSISTOR

TLP824, TLP825

VCRS, COMPACT DISC PLAYERS

COPIERS, FAX MACHINES, PRINTERS


VENDING MACHINES, TICKET MACHINES

VARIOUS POSITION DETECTION SENSORS

The TLP824 and TLP825 photo-interrupters combine a GaAs infrared LED with a high-sensitivity Si photodarlington transistor.


- Small package
- PWB direct mounting type : TLP824
- Side mounting type : TLP825
- Gap : 3 mm
- Resolution : Slit width = 0.5 mm
- High current transfer ratio : $I_C / I_F = 6\%$ (min) at $I_F = 10\text{ mA}$
- Detector impermeable to visible light
- Package material : Polycarbonate

MARKINGS

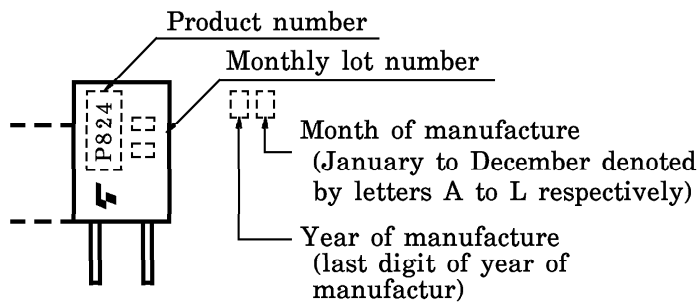


Letter color : Silver

| ABBREVIATION | TYPE |
|--------------|--------|
| P824 | TLP824 |
| P825 | TLP825 |

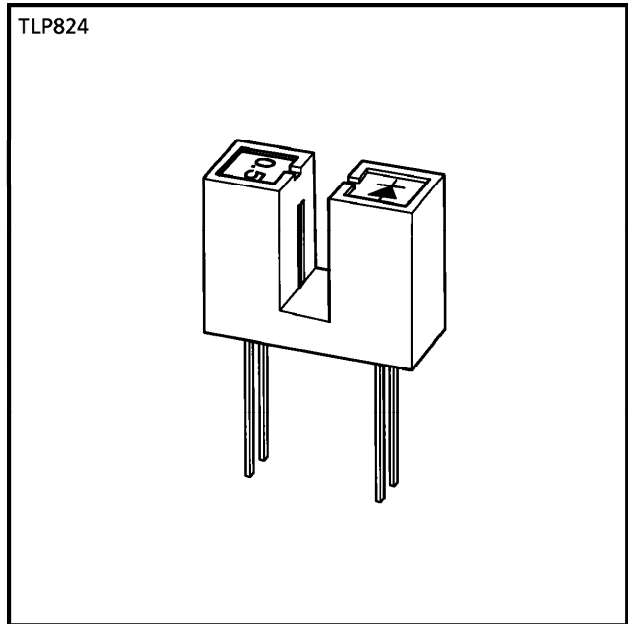

TOSHIBA 11-13K1

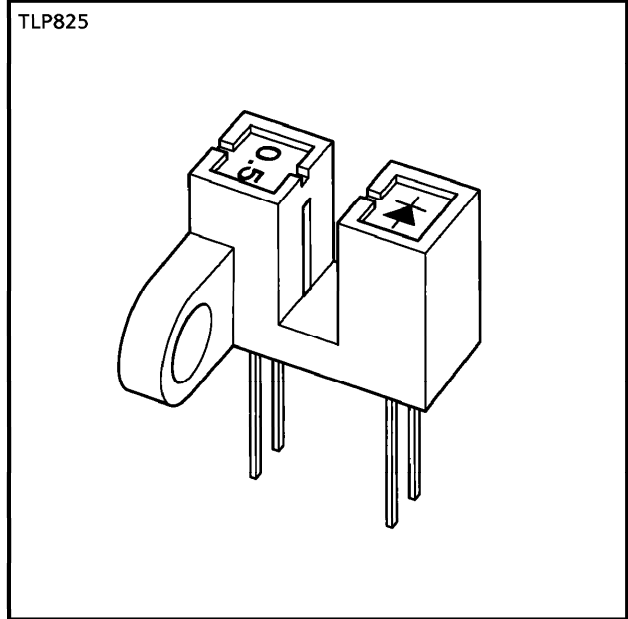

TOSHIBA 11-13M1

Weight : 0.81 g (typ.)
0.82 g (typ.)

MAXIMUM RATINGS (Ta = 25°C)

| CHARACTERISTIC | | SYMBOL | RATING | UNIT |
|------------------------------|--|---------------------|---------|-------|
| LED | Forward Current | I _F | 50 | mA |
| | Forward Current Derating (Ta > 25°C) | ΔI _F /°C | -0.33 | mA/°C |
| | Reverse Voltage | V _R | 5 | V |
| DETECTOR | Collector-Emitter Voltage | V _{CEO} | 35 | V |
| | Emitter-Collector Voltage | V _{ECO} | 5 | V |
| | Collector Power Dissipation | P _C | 75 | mW |
| | Collector Power Dissipation Derating (Ta > 25°C) | ΔP _C /°C | -1 | mW/°C |
| | Collector Current | I _C | 50 | mA |
| Operating Temperature Range | | T _{opr} | -25~85 | °C |
| Storage Temperature Range | | T _{stg} | -40~100 | °C |
| Soldering Temperature (5 s.) | | T _{sol} | 260 | °C |

RECOMMENDED OPERATING CONDITIONS

| CHARACTERISTIC | SYMBOL | Min | Typ. | Max | UNIT |
|-----------------------|------------------|-----|------|-----|------|
| Supply Voltage | V _{CC} | — | 5 | 24 | V |
| Forward Current | I _F | — | 10 | 20 | mA |
| Operating Temperature | T _{opr} | -10 | — | 75 | °C |

OPTICAL AND ELECTRICAL CHARACTERISTICS (Ta = 25°C)

| CHARACTERISTIC | | SYMBOL | TEST CONDITION | Min | Typ. | Max | UNIT |
|----------------|--------------------------------------|------------------------------------|--|------|------|------|------|
| LED | Forward Voltage | V _F | I _F = 10 mA | 1.00 | 1.15 | 1.30 | V |
| | Reverse Current | I _R | V _R = 5 V | — | — | 10 | μA |
| | Peak Emission Wavelength | λ _P | I _F = 10 mA | — | 940 | — | nm |
| DETECTOR | Dark Current | I _D (I _{CEO}) | V _{CE} = 24 V, I _F = 0 | — | — | 0.1 | μA |
| | Peak Sensitivity Wavelength | λ _P | | — | 870 | — | nm |
| COUPLED | Current Transfer Ratio | I _C / I _F | V _{CE} = 2 V, I _F = 10 mA | 6 | — | 90 | % |
| | Collector-Emitter Saturation Voltage | V _{CE} (sat) | I _F = 20 mA, I _C = 0.6 mA | — | 0.1 | 0.4 | V |
| | Rise Time | t _r | V _{CC} = 5 V, I _C = 1 mA, R _L = 1 kΩ | — | 15 | 50 | μs |
| | Fall Time | t _f | | — | 15 | 50 | |

PRECAUTIONS

The following points must be borne in mind.

1. Clean only the soldered part of the leads. Do not immerse the entire package in the cleaning solvent.
2. The package is made of polycarbonate. Polycarbonate is usually stable with acid, alcohol and aliphatic hydrocarbons, however, with petrochemicals (such as benzene, toluene and acetone), alkalis, aromatic hydrocarbons, or chloric hydrocarbons, polycarbonate may crack, swell or melt. Please take this into account when choosing a packaging material by referring to the table below.

<Chemicals which should not be used with polycarbonate>


| | PHENOMENON | CHEMICALS |
|---|-----------------------------------|---|
| A | Staining and slight deterioration | <ul style="list-style-type: none"> • Nitric acid (diluted), hydrogen peroxide, chlorine |
| B | Cracking, crazed or swelling | <ul style="list-style-type: none"> • Acetic acid (70% or more) • Gasoline • Methyl ethyl ketone, ethyl acetate, butyl acetate • Ethyl methacrylate, ethyl ether, MEK • Acetone, m-amino alcohol, carbon tetrachloride • Carbon disulfide, trichloroethylene, cresol • Thinners, oil of turpentine • Triethanolamine, TCP, TBP |
| C | Melting { } : Used as solvent | <ul style="list-style-type: none"> • Concentrated sulfuric acid • Benzene • Styrene, acrylonitrile, vinyl acetate • Ethylenediamine, diethylenediamine • {Chloroform, methyl chloride, tetrachloromethane, dioxane, } 1, 2-dichloroethane |
| D | Decomposition | <ul style="list-style-type: none"> • Ammonia water • Other alkalis |

3. Mount the device on a level surface.
4. Screws should be tightened to a clamping torque of 0.59 N·m (on the TLP825).
5. Conversion efficiency falls over time due to the current which flows in the infrared LED. When designing a circuit, take into account this change in conversion efficiency over time. The ratio of fluctuation in conversion efficiency to fluctuation in infrared LED optical output is 1:1.

$$\frac{I_C / I_F (t)}{I_C / I_F (0)} = \frac{P_O (t)}{P_O (0)}$$

PACKAGE DIMENSIONS
11-13K1


Unit : mm

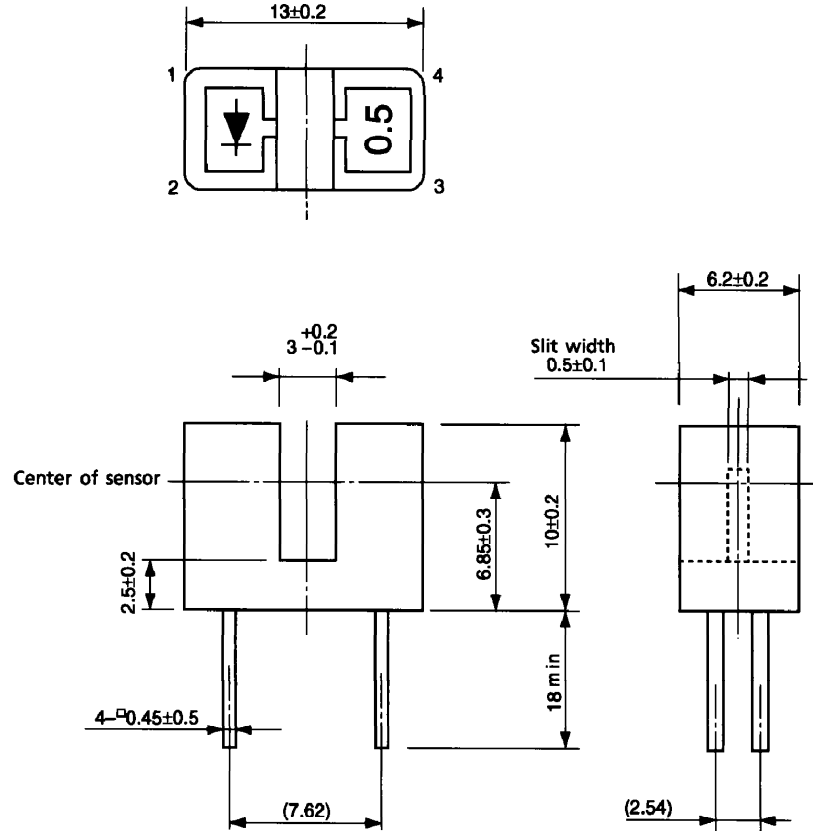

() : Reference value

Weight : 0.81 g (typ.)


PIN CONNECTION



- 1. Anode
- 2. Cathode
- 3. Collector
- 4. Emitter


PACKAGE DIMENSIONS
11-13M1

Unit : mm






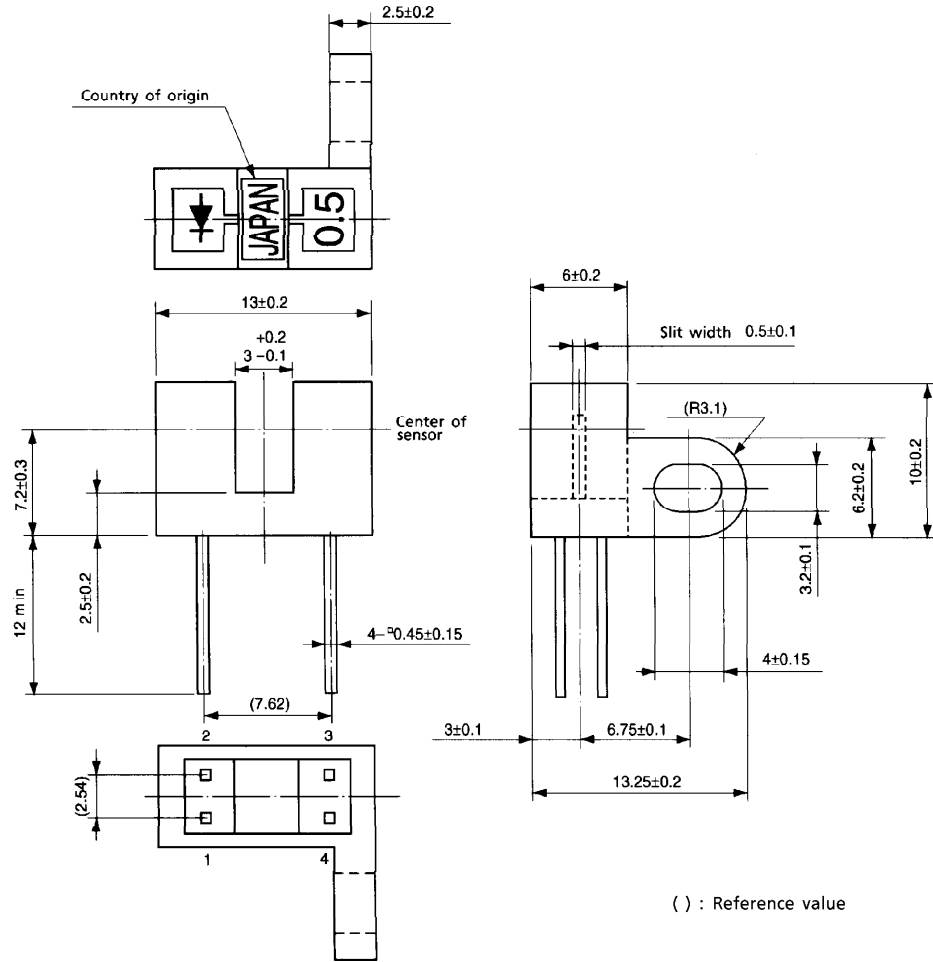








Weight : 0.82 g (typ.)

PIN CONNECTION




1. Anode
2. Cathode
3. Collector
4. Emitter

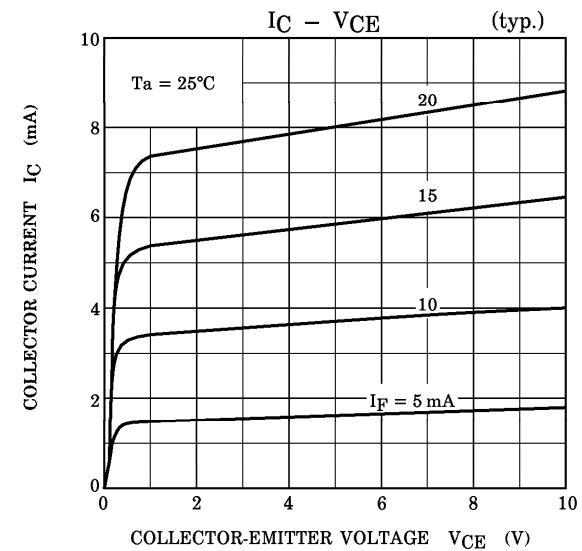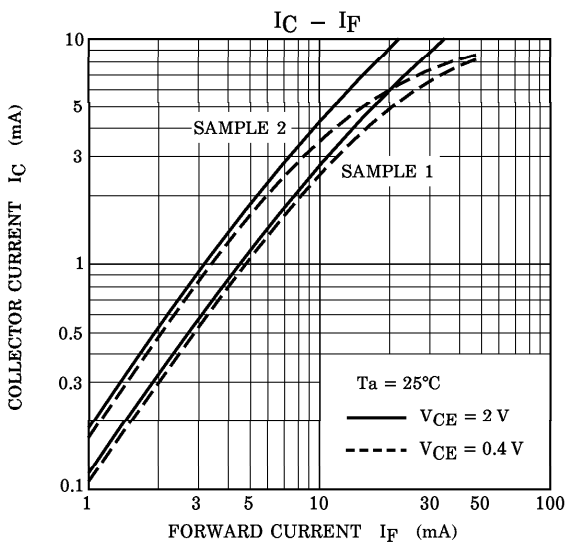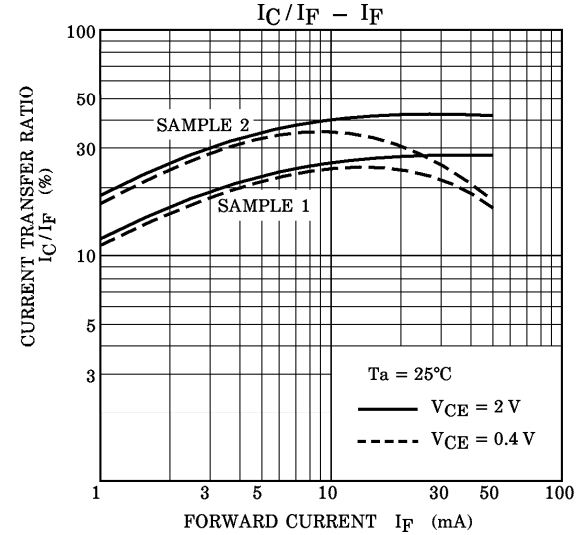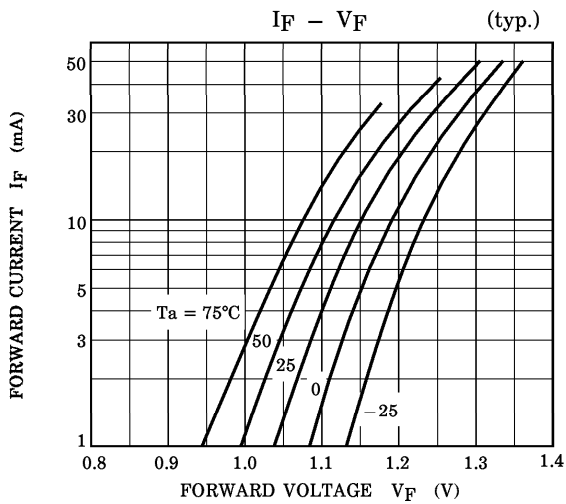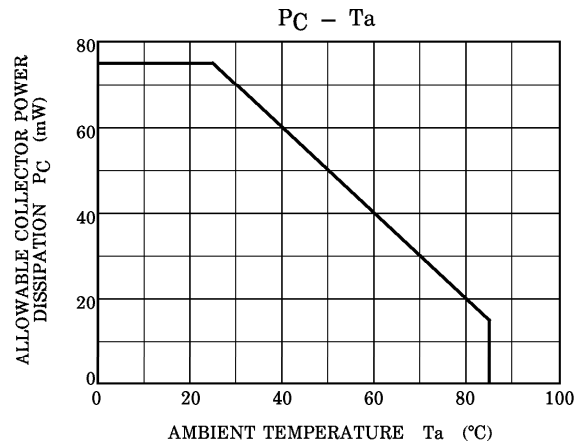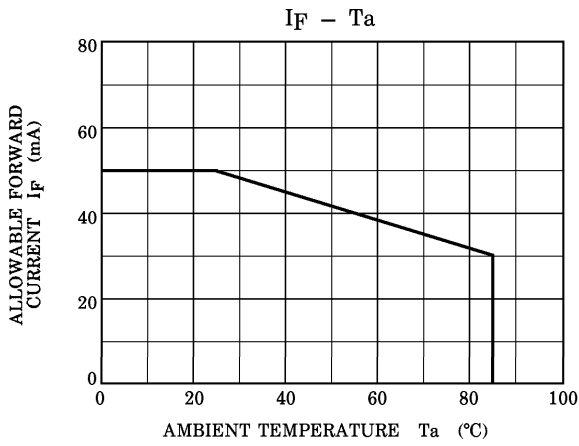


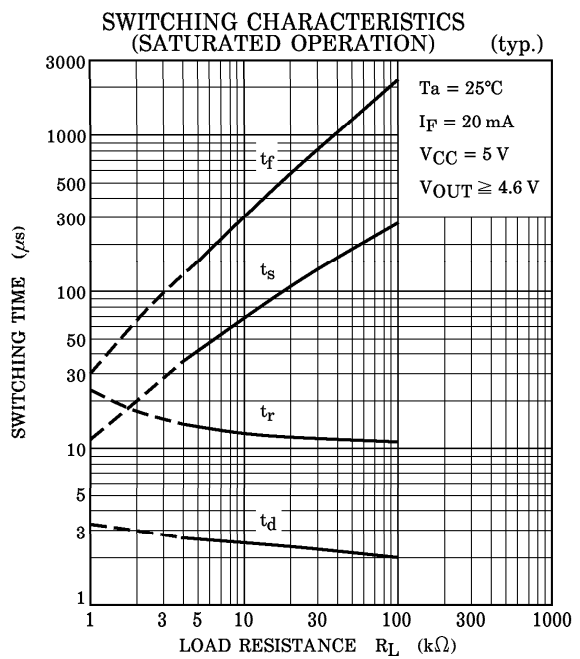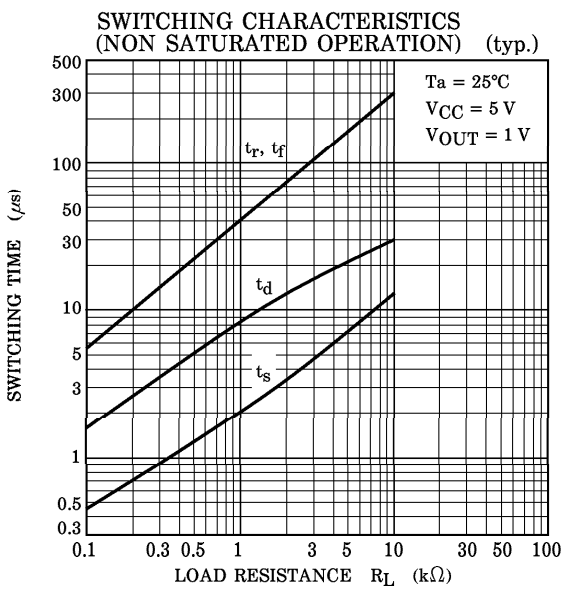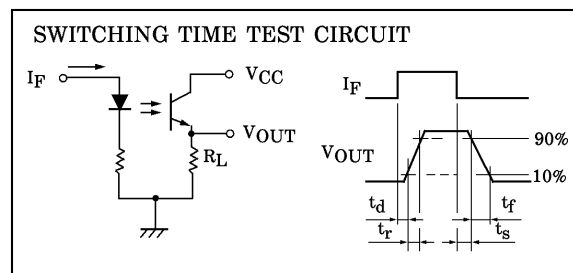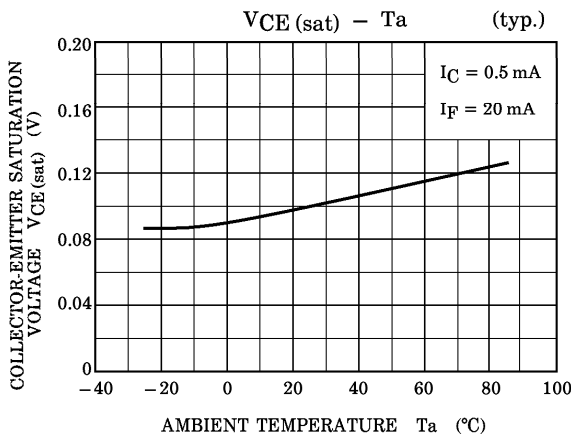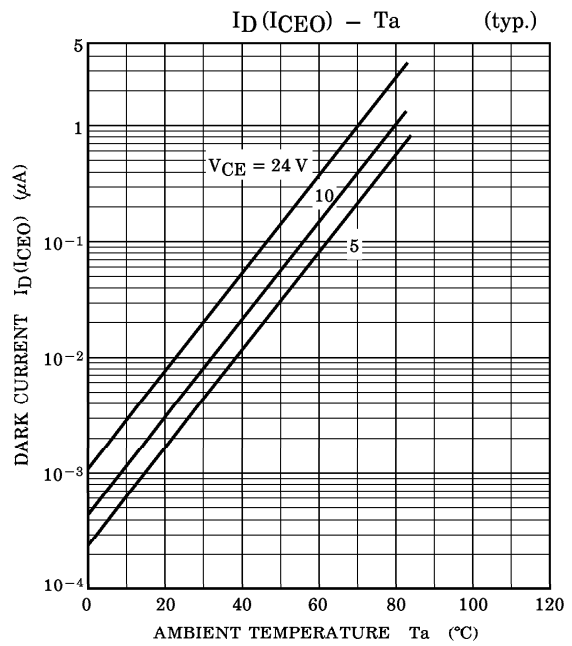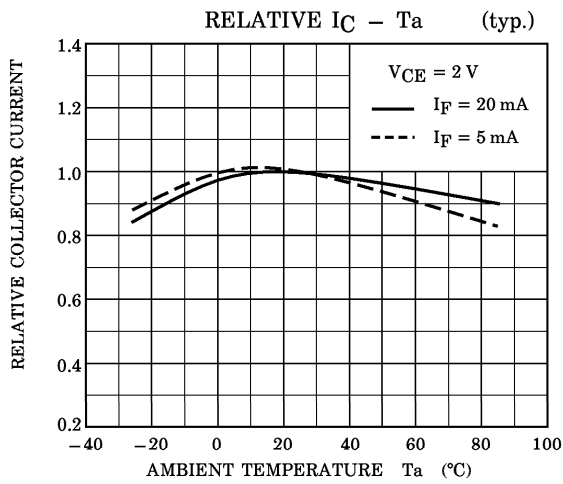


TLP824 DETECTION POSITION CHARACTERISTICS (1) (typ.)

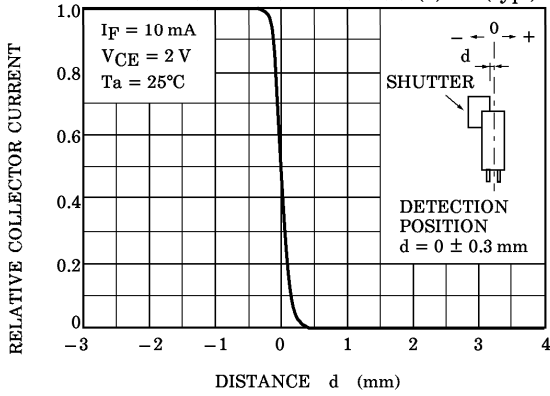


TLP824 DETECTION POSITION CHARACTERISTICS (2) (typ.)

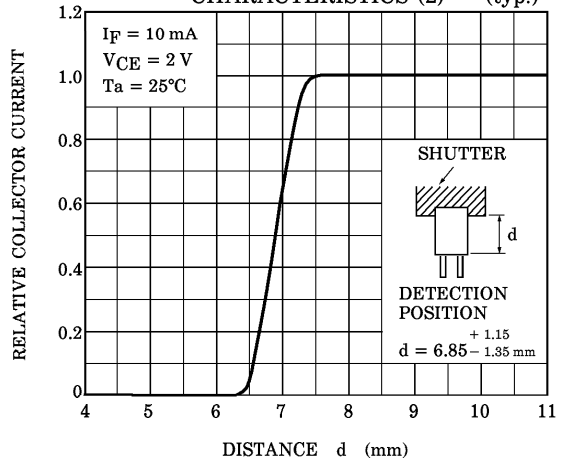

TLP825 DETECTION POSITION CHARACTERISTICS (1) (typ.)

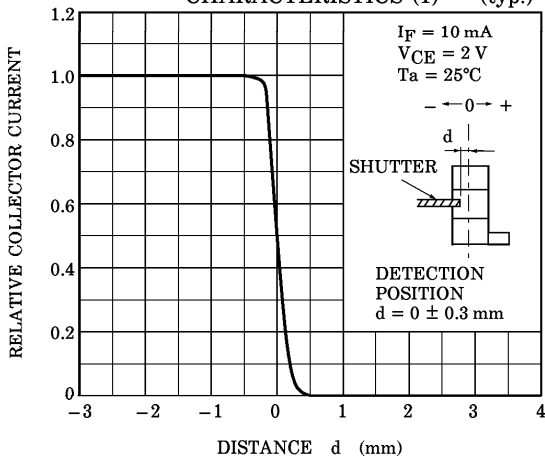


TLP825 DETECTION POSITION CHARACTERISTICS (2) (typ.)

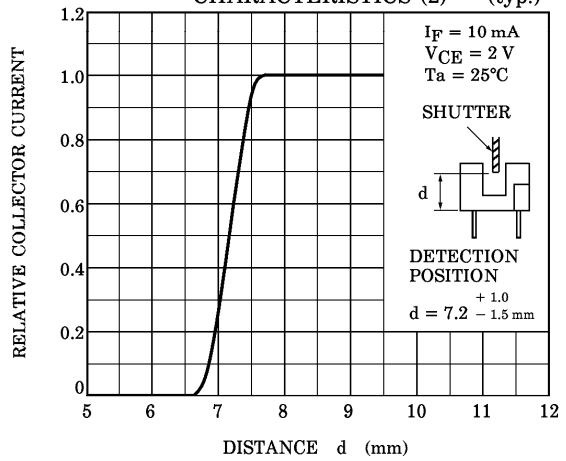


RELATIVE POSITIONING OF SHUTTER AND DEVICE

For normal operation position the shutter and the device as shown in the figure below. By considering the device's detection direction characteristic and switching time, determine the shutter slit width and pitch.

TLP824

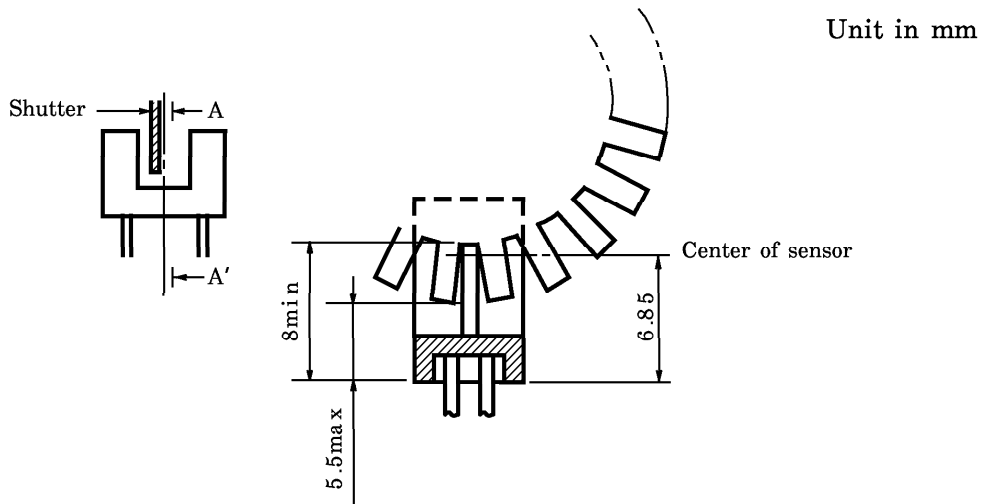

TLP825

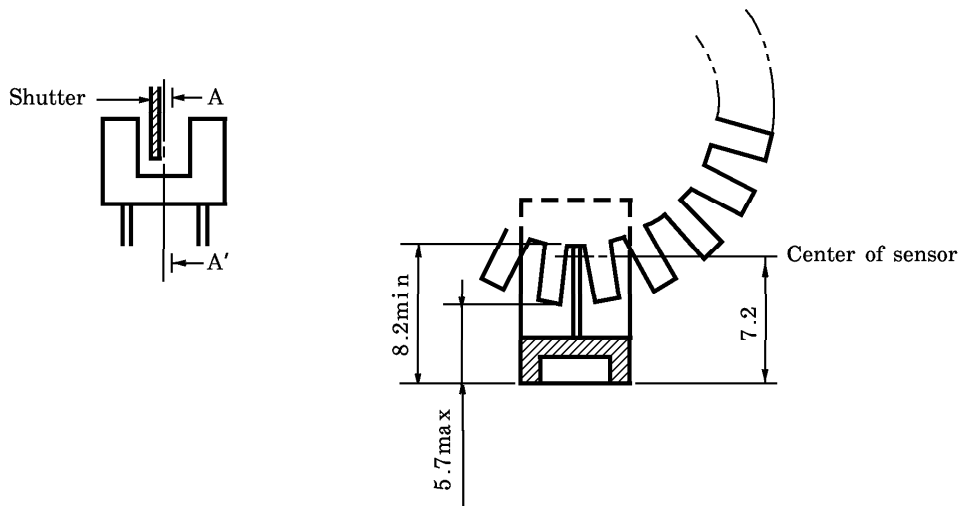

RESTRICTIONS ON PRODUCT USE

000707EAC

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.