


## HOT SWAPPABLE 2-WIRE BUS BUFFERS

Check for Samples: [TCA4311A](#)

### FEATURES

- Operating Power-Supply Voltage Range of 2.7-V to 5.5-V
- Supports Bidirectional Data Transfer of I<sup>2</sup>C Bus Signals
- SDA and SCL Lines Are Buffered Which Increases Fanout
- 1-V Precharge on All SDA and SCL Lines Prevents Corruption During Live Board Insertion and Removal From Backplane
- SDA and SCL Input Lines Are Isolated From Outputs
- Accommodates Standard Mode and Fast Mode I<sup>2</sup>C Devices
- Improved Noise Immunity
- Applications Include Hot Board Insertion and Bus Extension
- Low I<sub>CC</sub> Chip Disable of <1 µA
- READY Open-Drain Output
- Supports Clock Stretching, Arbitration, and Synchronization
- Powered-Off High-Impedance I<sup>2</sup>C Pins
- Open-Drain I<sup>2</sup>C Pins
- Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II
- ESD Protection Exceeds JESD 22
  - 8000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)

D OR DGK PACKAGES  
(TOP VIEW)



### DESCRIPTION/ORDERING INFORMATION

The TCA4311A is a hot swappable I<sup>2</sup>C bus buffer that supports I/O card insertion into a live backplane without corruption of the data and clock busses. Control circuitry prevents the backplane from being connected to the card until a stop command or bus idle occurs on the backplane without bus contention on the card. When the connection is made, this device provides bidirectional buffering, keeping the backplane and card capacitances isolated. During insertion, the SDA and SCL lines are precharged to 1 V to minimize the current required to charge the parasitic capacitance of the chip.

When the I<sup>2</sup>C bus is idle, the TCA4311A can be put into shutdown mode by setting the EN pin low. When EN is high, the TCA4311A resumes normal operation. It also includes an open drain READY output pin, which indicates that the backplane and card sides are connected together. When READY is high, the SDAIN and SCLIN are connected to SDAOUT and SCLOUT. When the two sides are disconnected, READY is low.

Both the backplane and card may be powered with supply voltages ranging from 2.7 V to 5.5 V, with no restrictions on which supply voltage is higher.

The TCA4311A has standard open-drain I/Os. The size of the pullup resistors to the I/Os depends on the system, but each side of this buffer must have a pullup resistor. The device is designed to work with Standard Mode and Fast Mode I<sup>2</sup>C devices in addition to SMBus devices. Standard Mode I<sup>2</sup>C devices only specify 3 mA in a generic I<sup>2</sup>C system where Standard Mode devices and multiple masters are possible. Under certain conditions, high termination currents can be used.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

CompactPCI is a trademark of PCI Industrial Computer Manufacturers Group.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2011–2012, Texas Instruments Incorporated

**Table 1. ORDERING INFORMATION**

| $T_A$         | PACKAGE <sup>(1)</sup> <sup>(2)</sup> |               | ORDERABLE PART NUMBER | TOP-SIDE MARKING |
|---------------|---------------------------------------|---------------|-----------------------|------------------|
| –40°C to 85°C | SOIC – D                              | Tube          | TCA4311AD             | PREVIEW          |
|               |                                       | Tape and reel | TCA4311ADR            | PREVIEW          |
|               | MSOP – DGK                            | Tape and reel | TCA4311ADGKR          | 6KS              |

(1) Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).


(2) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at [www.ti.com](http://www.ti.com).

**TERMINAL FUNCTIONS**

| SOIC (D) OR MSOP (DGK)<br>PACKAGE |          | DESCRIPTION   |
|-----------------------------------|----------|---|
| PIN NUMBER                        | NAME     |   |
| 1                                 | EN       | Active-high chip enable pin. If EN is low, the TCA4311A is in a low current (<1 $\mu$ A) mode. It also disables the rise-time accelerators, disables the bus precharge circuitry, drives READY low, isolates SDAIN from SDAOUT and isolates SCLIN from SCLOUT. EN should be high (at $V_{CC}$ ) for normal operation. Connect EN to $V_{CC}$ if this feature is not being used. |
| 2                                 | SCLOUT   | Serial clock output. Connect this pin to the SCL bus on the card.   |
| 3                                 | SCLIN    | Serial clock input. Connect this pin to the SCL bus on the backplane.   |
| 4                                 | GND      | Supply ground   |
| 5                                 | READY    | Connection flag/rise-time accelerator control. READY is low when either EN is low or the start-up sequence described in the operation section has not been completed. READY goes high when EN is high and start-up is complete. Connect a 10-k $\Omega$ resistor from this pin to $V_{CC}$ to provide the pull up.  |
| 6                                 | SDAIN    | Serial data input. Connect this pin to the SDA bus on the backplane.  |
| 7                                 | SDAOUT   | Serial data output. Connect this pin to the SDA bus on the card.  |
| 8                                 | $V_{CC}$ | Supply power. Main input power supply from backplane. This is the supply voltage for the devices on the backplane I <sup>2</sup> C busses. Connect pullup resistors from SDAIN and SCLIN (and also from SDAOUT and SCLOUT) to this pin. Place a bypass capacitor of at least 0.01 $\mu$ F close to this pin for best results.   |

## BLOCK DIAGRAM

### 2-Wire Bus Buffer and Hot Swap Controller

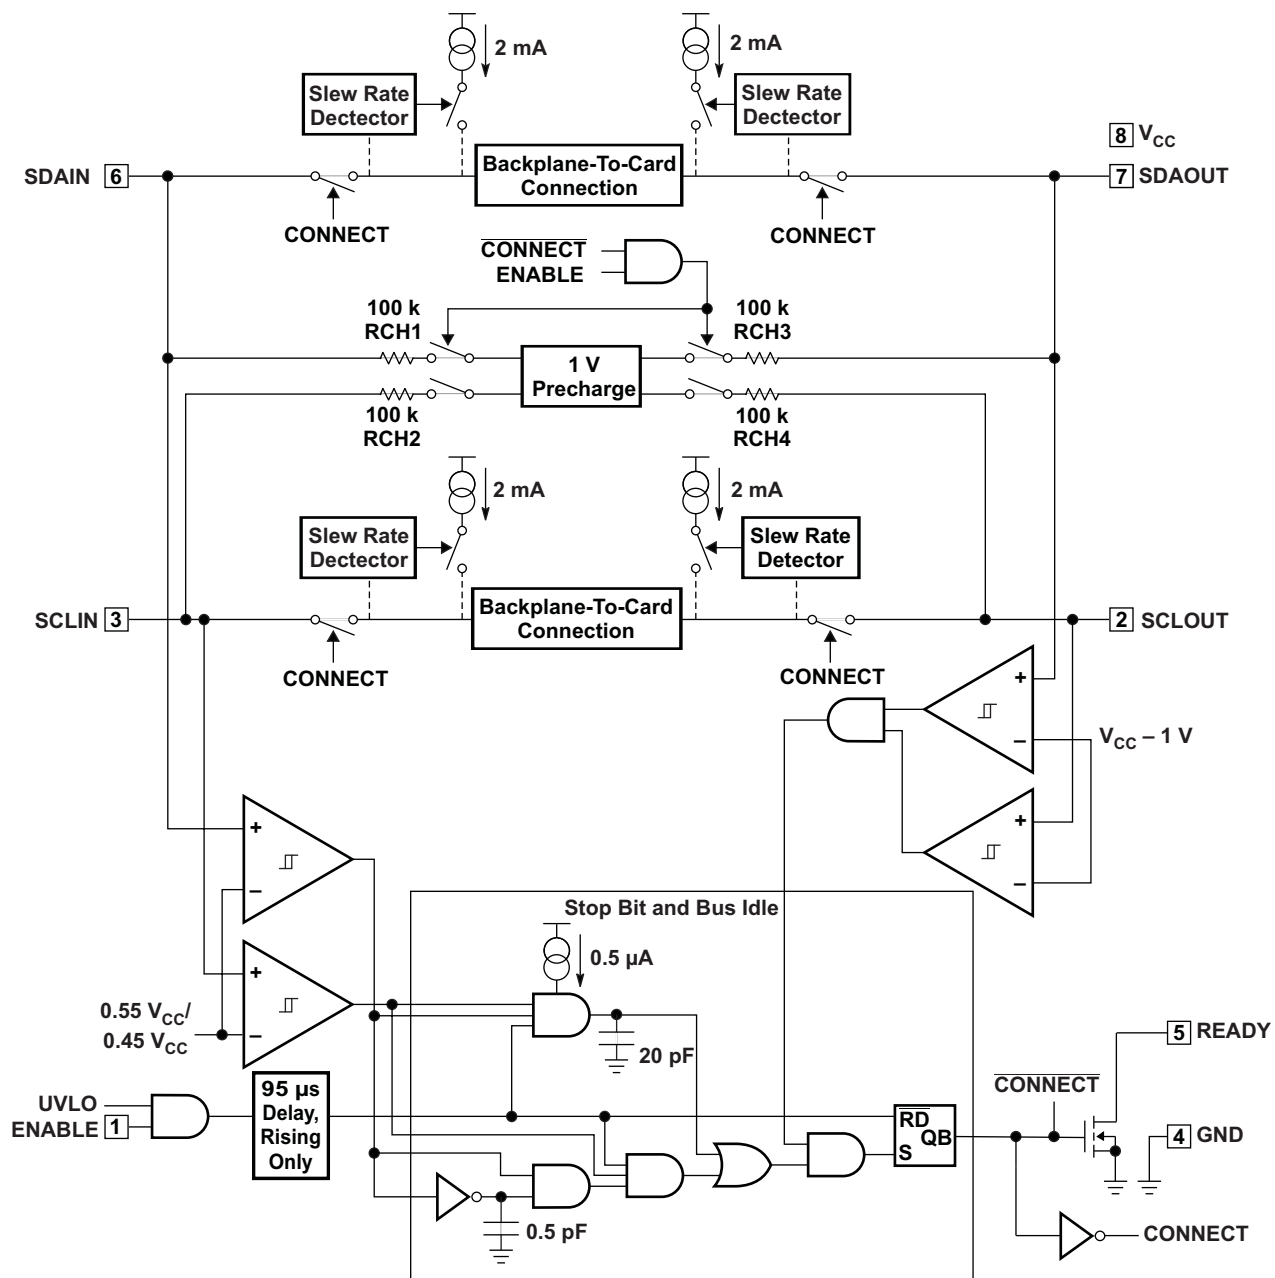

**ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>**

over operating free-air temperature range (unless otherwise noted)

|               |   |                              | MIN  | MAX  | UNIT |
|---------------|---|------------------------------|------|------|------|
| $V_{CC}$      | Supply voltage range                              |                              | –0.5 | 7    | V    |
| $V_{I/O}$     | I <sup>2</sup> C bus voltage range <sup>(2)</sup> | SDAIN, SCLIN, SDAOUT, SCLOUT | –0.5 | 7    | V    |
| $V_I$         | Input voltage range <sup>(2)</sup>                | EN                           | –0.5 | 7    | V    |
| $I_{IK}$      | Input clamp current                               | $V_I < 0$                    |      | –50  | mA   |
| $I_{OK}$      | Output clamp current                              | $V_O < 0$                    |      | –50  | mA   |
| $I_O$         | Continuous output current                         |                              |      | ±50  | mA   |
| $I_{CC}$      | Continuous current through $V_{CC}$ or GND        |                              |      | ±100 | mA   |
| $\theta_{JA}$ | Package thermal impedance <sup>(3)</sup>          | D package                    |      | 97   | °C/W |
|               |   | DGK package                  |      | 172  |      |
| $T_{stg}$     | Storage temperature range                         |                              | –65  | 150  | °C   |

(1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.

(3) The package thermal impedance is calculated in accordance with JESD 51-7.

**RECOMMENDED OPERATING CONDITIONS**

|          |                                |                         | MIN                 | MAX                 | UNIT |
|----------|--------------------------------|-------------------------|---------------------|---------------------|------|
| $V_{CC}$ | Supply voltage                 |                         | 2.7                 | 5.5                 | V    |
| $V_{IH}$ | High-level input voltage       | SDA and SCL inputs      | $0.7 \times V_{CC}$ | 5.5                 | V    |
|          |                                | EN input                | 2                   | 5.5                 |      |
| $V_{IL}$ | Low-level input voltage        | SDA and SCL inputs      | –0.5                | $0.3 \times V_{CC}$ | V    |
|          |                                | EN input                | –0.5                | 0.8                 |      |
| $I_{OL}$ | Low-level output current       | $V_{CC} = 3\text{ V}$   |                     | 3                   | mA   |
|          |                                | $V_{CC} = 4.5\text{ V}$ |                     | 3                   |      |
| $T_A$    | Operating free-air temperature |                         | –40                 | 85                  | °C   |

## ELECTRICAL CHARACTERISTICS

over operating free-air temperature range (unless otherwise noted)

| PARAMETER                      |                                   | TEST CONDITIONS   | MIN                 | TYP                 | MAX                 | UNIT          |
|--------------------------------|-----------------------------------|---|---------------------|---------------------|---------------------|---------------|
| <b>Power Supply</b>            |                                   |   |                     |                     |                     |               |
| $V_{CC}$                       | Positive supply voltage           |   | 2.7                 |                     | 5.5                 | V             |
| $I_{CC}$                       | Supply current                    | $V_{CC} = 5.5\text{ V}$ , $V_{SDAIN} = V_{SCLIN} = 0\text{ V}$                  |                     | 5.1                 | 7                   | mA            |
| $I_{SD}$                       | Supply current in shutdown mode   | $V_{EN} = 0\text{ V}$   |                     | 0.1                 |                     | $\mu\text{A}$ |
| <b>Start-Up Circuitry</b>      |                                   |   |                     |                     |                     |               |
| $V_{PRE}$                      | Precharge voltage                 | SDA, SCL floating   | 0.8                 | 1                   | 1.2                 | V             |
| $t_{IDLE}$                     | Bus idle time                     |   | 50                  | 95                  | 150                 | $\mu\text{s}$ |
| $V_{EN}$                       | EN threshold voltage              |   | $0.5 \times V_{CC}$ |                     | $0.9 \times V_{CC}$ | V             |
| $V_{DIS}$                      | Disable threshold voltage         | EN Pin  | $0.1 \times V_{CC}$ | $0.5 \times V_{CC}$ |                     | V             |
| $I_{EN}$                       | EN input current                  | EN from 0 V to $V_{CC}$   |                     | $\pm 0.1$           | $\pm 1$             | $\mu\text{A}$ |
| $t_{EN}$                       | Enable time                       |   |                     | 95                  |                     | $\mu\text{s}$ |
| $t_{DIS}$                      | Disable time (EN to READY)        |   |                     | 30                  |                     | ns            |
| $t_{STOP}$                     | SDAIN to READY delay after STOP   |   |                     | 1.2                 |                     | $\mu\text{s}$ |
| $t_{READY}$                    | SCLOUT/SDAOUT to READY            |   |                     | 0.8                 |                     | $\mu\text{s}$ |
| $I_{OFF}$                      | READY OFF state leakage current   |   |                     | $\pm 0.1$           |                     | $\mu\text{A}$ |
| $V_{OL}$                       | READY output low voltage          | $I_{PULLUP} = 3\text{ mA}$  |                     |                     | 0.4                 | V             |
| <b>Rise-Time Accelerators</b>  |                                   |   |                     |                     |                     |               |
| $I_{PULLUPAC}$                 | Transient boosted pull-up current | Positive transition on SDA, SCL, $V_{CC} = 2.7\text{ V}$ ,                      | 1                   | 2                   |                     | mA            |
| <b>Input-Output Connection</b> |                                   |   |                     |                     |                     |               |
| $V_{OS}$                       | Input-output offset voltage       | 10 k $\Omega$ to $V_{CC}$ on SDA, SCL, $V_{CC} = 3.3\text{ V}$ , <sup>(1)</sup> | 0                   | 100                 | 175                 | mV            |
| $C_{IN}$                       | Digital input capacitance         |   |                     |                     | 10                  | pF            |
| $V_{OL}$                       | Output low voltage, input = 0 V   | SDA, SCL pins, $I_{SINK} = 3\text{ mA}$ ,                                       | 0                   |                     | 0.4                 | V             |
| $I_I$                          | Input leakage current             | SDA, SCL pins = $V_{CC} = 5.5\text{ V}$   |                     |                     | $\pm 5$             | $\mu\text{A}$ |

(1) The connection circuitry always regulates its output to a higher voltage than its input. The magnitude of this offset voltage as a function of the pullup resistor and  $V_{CC}$  voltage is shown in the Typical Performance Characteristics section.

## OPERATION

### Start-Up

When the TCA4311A first receives power on its  $V_{CC}$  pin, either during power-up or during live insertion, it starts in an undervoltage lockout (UVLO) state, ignoring any activity on the SDA and SCL pins until  $V_{CC}$  rises above 2.5 V.

During this time, the 1 V precharge circuitry is also active and forces 1 V through 100-k $\Omega$  nominal resistors to the SDA and SCL pins. Because the I/O card is being plugged into a live backplane, the voltage on the backplane SDA and SCL busses may be anywhere between 0 V and  $V_{CC}$ . Precharging the SCL and SDA pins to 1 V minimizes the worst-case voltage differential these pins will see at the moment of connection, therefore minimizing the amount of disturbance caused by the I/O card.

Once the TCA4311A comes out of UVLO, it assumes that SDAIN and SCLIN have been inserted into a live system and that SDAOUT and SCLOUT are being powered up at the same time as itself. Therefore, it looks for either a stop bit or bus idle condition on the backplane side to indicate the completion of a data transaction. When either one occurs, the part also verifies that both the SDAOUT and SCLOUT voltages are high. When all of these conditions are met, the input-to-output connection circuitry is activated, joining the SDA and SCL busses on the I/O card with those on the backplane, and the rise time accelerators are enabled.

### Connection Circuitry

Once the connection circuitry is activated, the functionality of the SDAIN and SDAOUT pins is identical. A low forced on either pin at any time results in both pin voltages being low. For proper operation, logic low input voltages should be no higher than 0.4 V with respect to the ground pin voltage of the TCA4311A. SDAIN and SDAOUT enter a logic high state only when all devices on both SDAIN and SDAOUT release high. The same is true for SCLIN and SCLOUT. This important feature ensures that clock stretching, clock synchronization, arbitration and the acknowledge protocol always work, regardless of how the devices in the system are tied to the TCA4311A.

Another key feature of the connection circuitry is that it provides bidirectional buffering, keeping the backplane and card capacitances isolated. Because of this isolation, the waveforms on the backplane busses look slightly different than the corresponding card bus waveforms, as described here.

### Input to Output Offset Voltage

When a logic low voltage,  $V_{LOW1}$ , is driven on any of the TCA4311A's data or clock pins, the TCA4311A regulates the voltage on the other side of the chip (call it  $V_{LOW2}$ ) to a slightly higher voltage, as directed by the following equation:

$$V_{LOW2} = V_{LOW1} + 75 \text{ mV} + (V_{CC}/R) \times 100$$

where R is the bus pullup resistance in ohms ( $\Omega$ ). For example, if a device is forcing SDAOUT to 10 mV where  $V_{CC} = 3.3$  V and the pullup resistor R on SDAIN is 10 k $\Omega$ , then the voltage on SDAIN =  $10 + 75 + (3.3/10000) \times 100 = 118$  mV. See the *Typical Performance Characteristics* section for curves showing the offset voltage as a function of  $V_{CC}$  and R.

### Propagation Delays

During a rising edge, the rise-time on each side is determined by the combined pullup current of the TCA4311A boost current and the bus resistor and the equivalent capacitance on the line. If the pullup currents are the same, a difference in rise-time occurs which is directly proportional to the difference in capacitance between the two sides. This effect is displayed in [Figure 1](#) for  $V_{CC} = 3.3$  V and a 10-k $\Omega$  pullup resistor on each side (50 pF on one side and 150 pF on the other). Since the output side has less capacitance than the input, it rises faster and the effective  $t_{PLH}$  is negative.

There is a finite propagation delay,  $t_{PHL}$ , through the connection circuitry for falling waveforms. [Figure 2](#) shows the falling edge waveforms for the same  $V_{CC}$ , pullup resistors and equivalent capacitance conditions as used in [Figure 1](#). An external NMOS device pulls down the voltage on the side with 150 pF capacitance; the TCA4311A pulls down the voltage on the opposite side, with a delay of 55 ns. This delay is always positive and is a function of supply voltage, temperature and the pullup resistors and equivalent bus capacitances on both sides of the bus. The *Typical Performance Characteristics* section shows  $t_{PHL}$  as a function of temperature and voltage for

10-k $\Omega$  pullup resistors and 100 pF equivalent capacitance on both sides of the part. By comparison with Figure 2, the  $V_{CC} = 3.3$  V curve shows that increasing the capacitance from 50 pF to 100 pF results in a  $t_{PHL}$  increase from 55 ns to 75 ns. Larger output capacitances translate to longer delays (up to 150 ns). Users must quantify the difference in propagation times for a rising edge versus a falling edge in their systems and adjust setup and hold times accordingly.

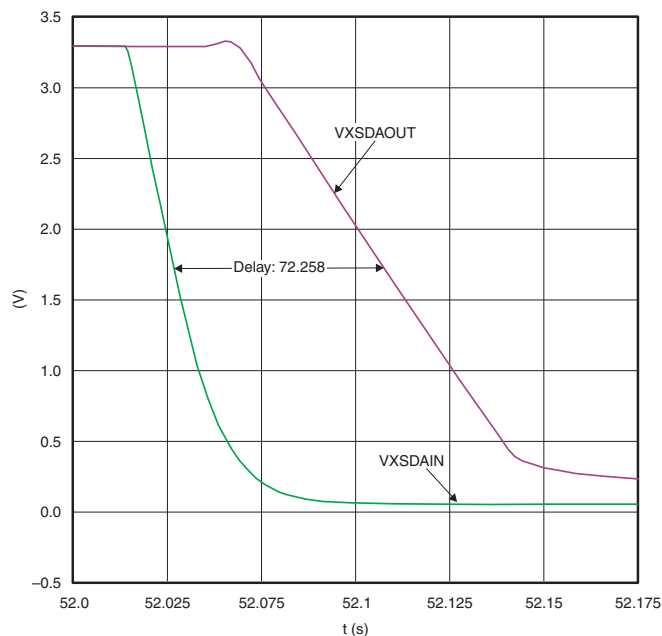


Figure 1. Input-Output Connection  $t_{PLH}$

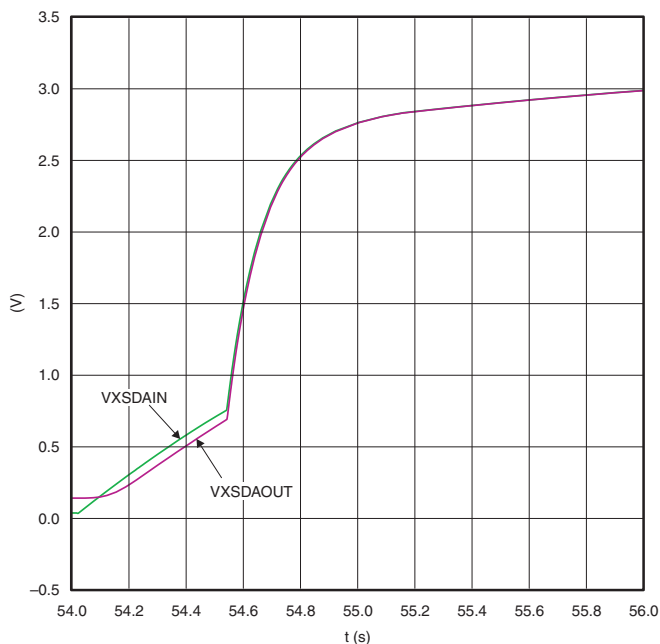


Figure 2. Input-Output Connection  $t_{PHL}$

## Rise-Time Accelerators

Once connection has been established, rise-time accelerator circuits on all four SDA and SCL pins are activated. These allow the user to choose weaker DC pullup currents on the bus, reducing power consumption while still meeting system rise-time requirements. During positive bus transitions, the TCA4311A switches in 2 mA (typical) of current to quickly slew the SDA and SCL lines once their DC voltages exceed 0.6 V. Using a general rule of 20 pF of capacitance for every device on the bus (10 pF for the device and 10 pF for interconnect), choose a pullup current so that the bus will rise on its own at a rate of at least 1.25 V/ $\mu$ s to guarantee activation of the accelerators.

For example, assume an SMBus system with  $V_{CC} = 3$  V, a 10-k $\Omega$  pullup resistor and equivalent bus capacitance of 200 pF. The rise-time of an SMBus system is calculated from  $(V_{IL(MAX)} - 0.15$  V) to  $(V_{IH(MIN)} + 0.15$  V), or 0.65 V to 2.25 V. It takes an RC circuit 0.92 time constants to traverse this voltage for a 3 V supply; in this case,  $0.92 \times (10 \text{ k}\Omega \times 200 \text{ pF}) = 1.84 \mu\text{s}$ . Thus, the system exceeds the maximum allowed rise-time of 1  $\mu$ s by 84%. However, using the rise-time accelerators, which are activated at a DC threshold of below 0.65 V, the worst-case rise-time is:  $(2.25 \text{ V} - 0.65 \text{ V}) \times 200 \text{ pF} / 1 \text{ mA} = 320 \text{ ns}$ , which meets the 1  $\mu$ s rise-time requirement.

## READY Digital Output

This pin provides a digital flag which is low when either EN is low or the start-up sequence described earlier in this section has not been completed. READY goes high when EN is high and start-up is complete. The pin is driven by an open drain pull-down capable of sinking 3 mA while holding 0.4 V on the pin. Connect a resistor of 10 k $\Omega$  to  $V_{CC}$  to provide the pullup.

## EN Low Current Disable

Grounding the EN pin disconnects the backplane side from the card side, disables the rise-time accelerators, drives READY low, disables the bus precharge circuitry and puts the part in a near-zero current state. When the pin voltage is driven all the way to  $V_{CC}$ , the part waits for data transactions on both the backplane and card sides to be complete (as described in the Start-Up section) before reconnecting the two sides.

## Resistor Pull-Up Value Selection

The system pullup resistors must be strong enough to provide a positive slew rate of 1.25 V/μs on the SDA and SCL pins, in order to activate the boost pullup currents during rising edges. Choose maximum resistor value R using the formula:

$$R \leq (V_{CC(MIN)} - 0.6) (800,000) / C$$

where R is the pullup resistor value in ohms,  $V_{CC(MIN)}$  is the minimum  $V_{CC}$  voltage and C is the equivalent bus capacitance in picofarads (pF).


In addition, regardless of the bus capacitance, always choose  $R \leq 16 \text{ k}\Omega$  for  $V_{CC} = 5.5 \text{ V}$  maximum,  $R \leq 24 \text{ k}\Omega$  for  $V_{CC} = 3.6 \text{ V}$  maximum. The start-up circuitry requires logic high voltages on SDAOUT and SCLOUT to connect the backplane to the card, and these pullup values are needed to overcome the precharge voltage.

## Systems With Disparate Supply Voltages


In large 2-wire systems, the  $V_{CC}$  voltages seen by devices at various points in the system can differ by a few hundred millivolts or more. This situation is well modeled by a series resistor in the  $V_{CC}$  line, as shown in [Figure 13](#). For proper operation of the TCA4311A, make sure that  $V_{CC(BUS)} \geq V_{CC(TCA4311A)} - 0.5 \text{ V}$ .



## TYPICAL PERFORMANCE CHARACTERISTICS

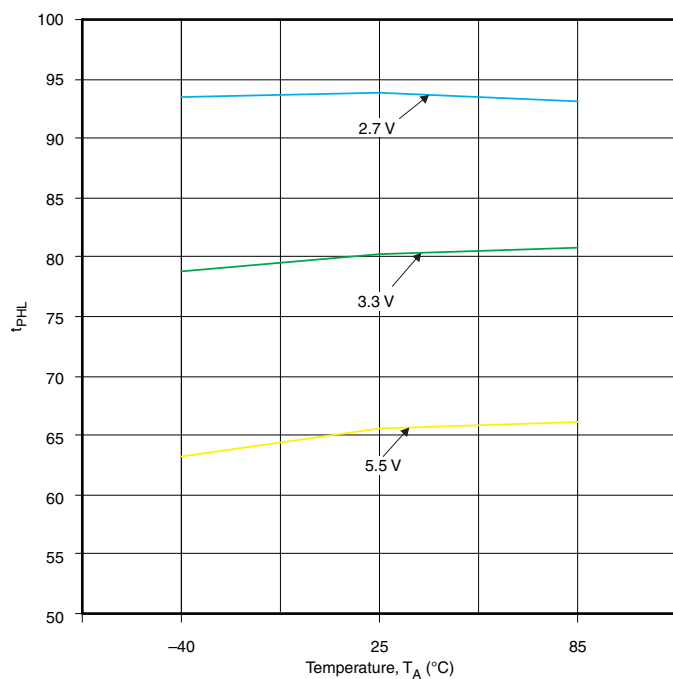

**Figure 3. Input-Output  $t_{PLH}$  vs Temperature**

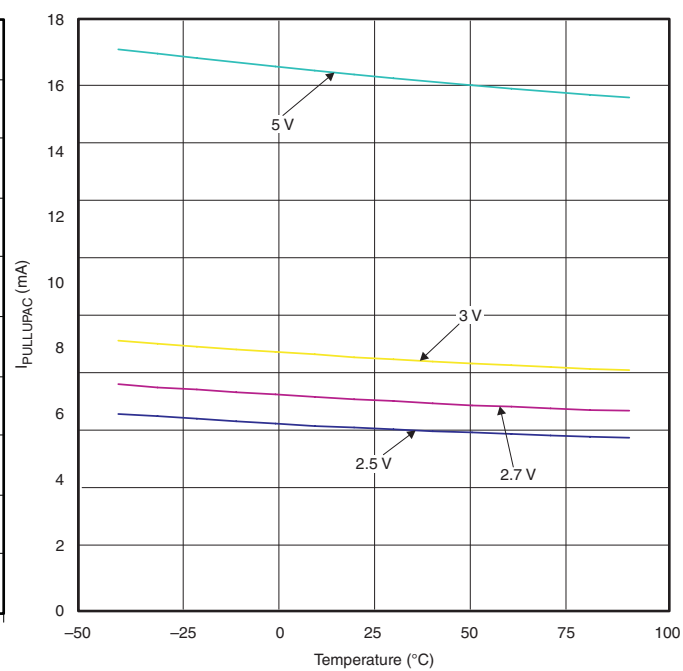

**Figure 4.  $I_{PULLUPAC}$  vs Temperature**

## TYPICAL PERFORMANCE CHARACTERISTICS (continued)


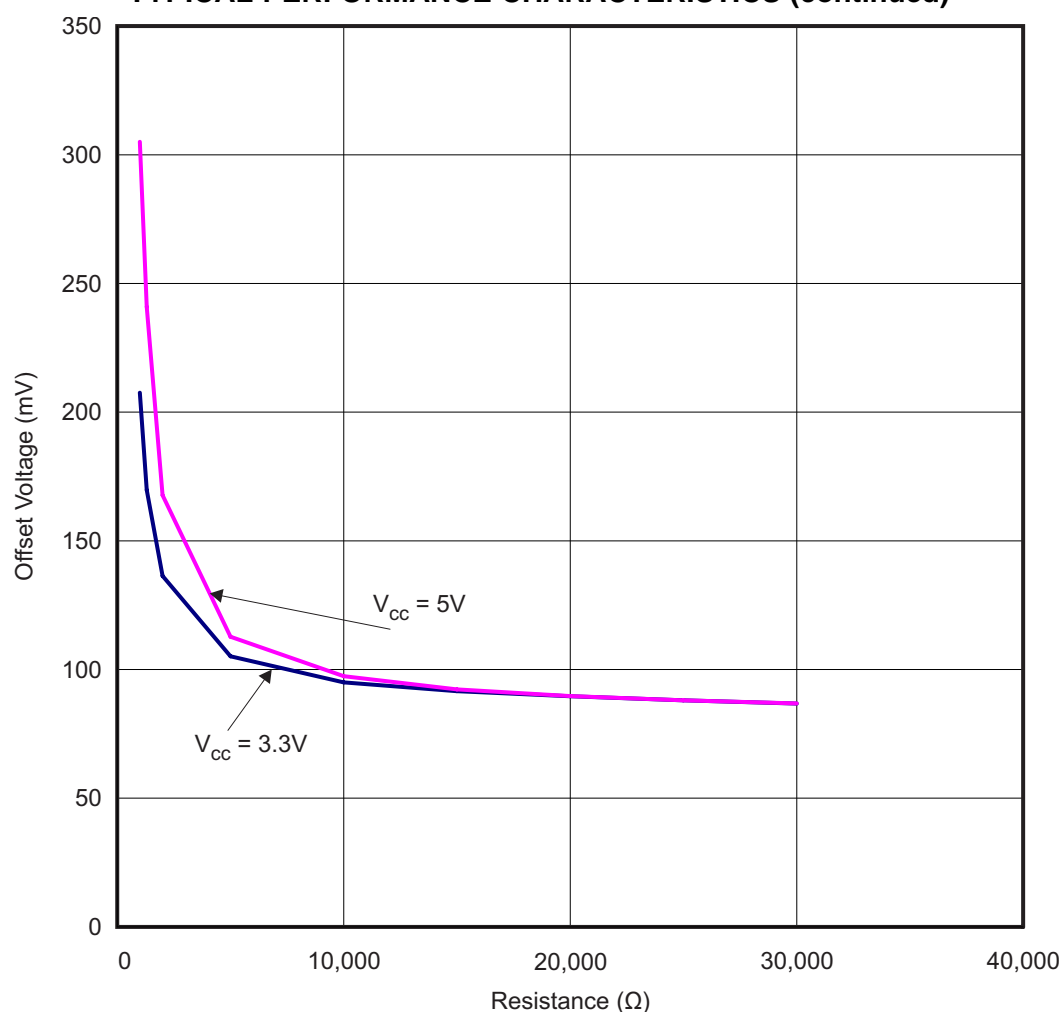


Figure 5. Input-output Offset Voltage vs Pullup Resistor

## PARAMETER MEASUREMENT INFORMATION

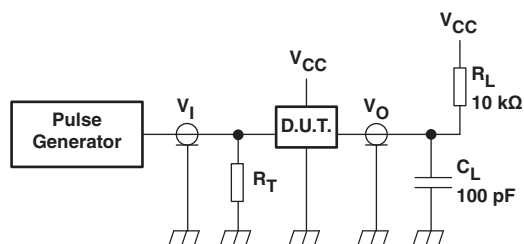


$R_L$  = Load resistor


$C_L$  = Load capacitance includes jig and probe capacitance

$R_T$  = Termination resistance should be equal to the output impedance  $Z_0$  of the pulse generators.

**Figure 6. Test Circuitry for Switching Times**

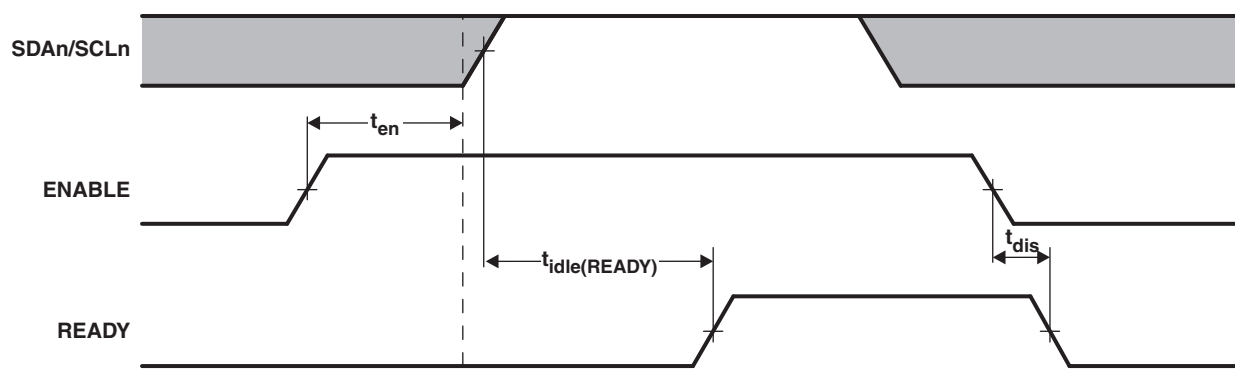


**Figure 7. Timing for  $t_{en}$ ,  $t_{idle(READY)}$ , and  $t_{dis}$**

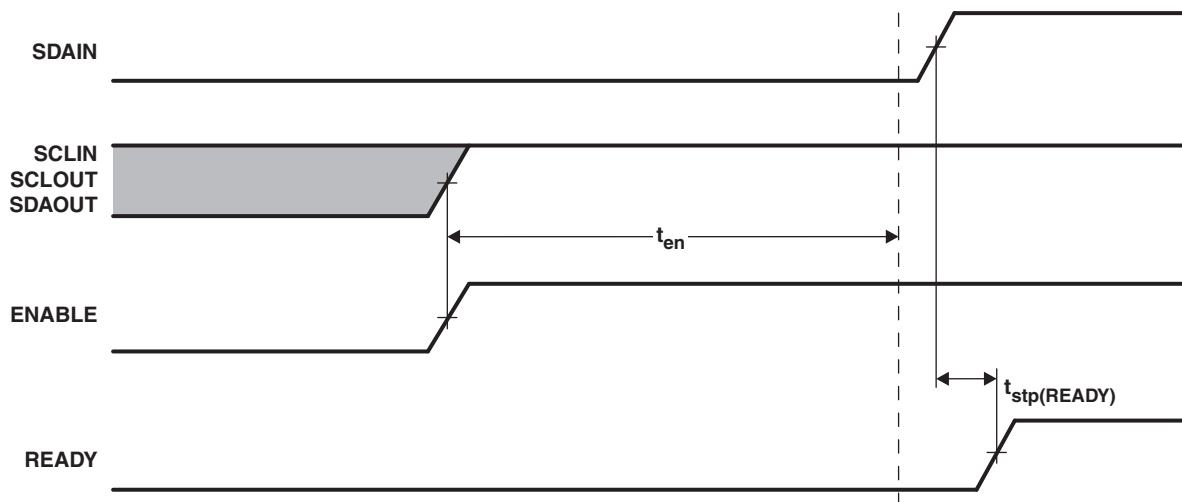

**Figure 8.  $t_{stp(READY)}$  That Can Occur After  $t_{en}$**

## PARAMETER MEASUREMENT INFORMATION (continued)

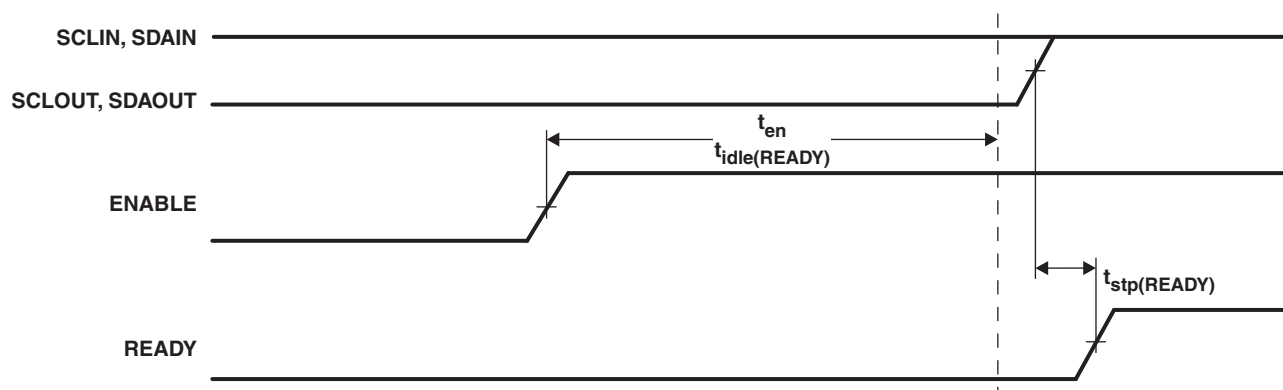**Figure 9.**  $t_{stp(READY)}$  That Can Occur After  $t_{en}$  and  $t_{idle(READY)}$

## APPLICATION INFORMATION

### Live Insertion and Capacitance Buffering Application

Figure 10 through Figure 11 illustrate the usage of the TCA4311A in applications that take advantage of both its hot swap controlling and capacitance buffering features. In all of these applications, note that if the I/O cards were plugged directly into the backplane, all of the backplane and card capacitances would add directly together, making rise- and fall-time requirements difficult to meet. Placing a TCA4311A on the edge of each card, however, isolates the card capacitance from the backplane. For a given I/O card, the TCA4311A drives the capacitance of everything on the card and the backplane must drive only the capacitance of the TCA4311A, which is less than 10 pF.

Figure 10 shows the TCA4311A in a CompactPCI™ configuration. Connect  $V_{CC}$  and EN to the output of one of the CompactPCI power supply Hot Swap circuits. Use a pullup resistor to EN for a card side enable/disable.

$V_{CC}$  is monitored by a filtered UVLO circuit. With the  $V_{CC}$  voltage powering up after all other pins have established connection, the UVLO circuit ensures that the backplane and card data and clock busses are not connected until the transients associated with live insertion have settled. Owing to their small capacitance, the SDAIN and SCLIN pins cause minimal disturbance on the backplane busses when they make contact with the connector.

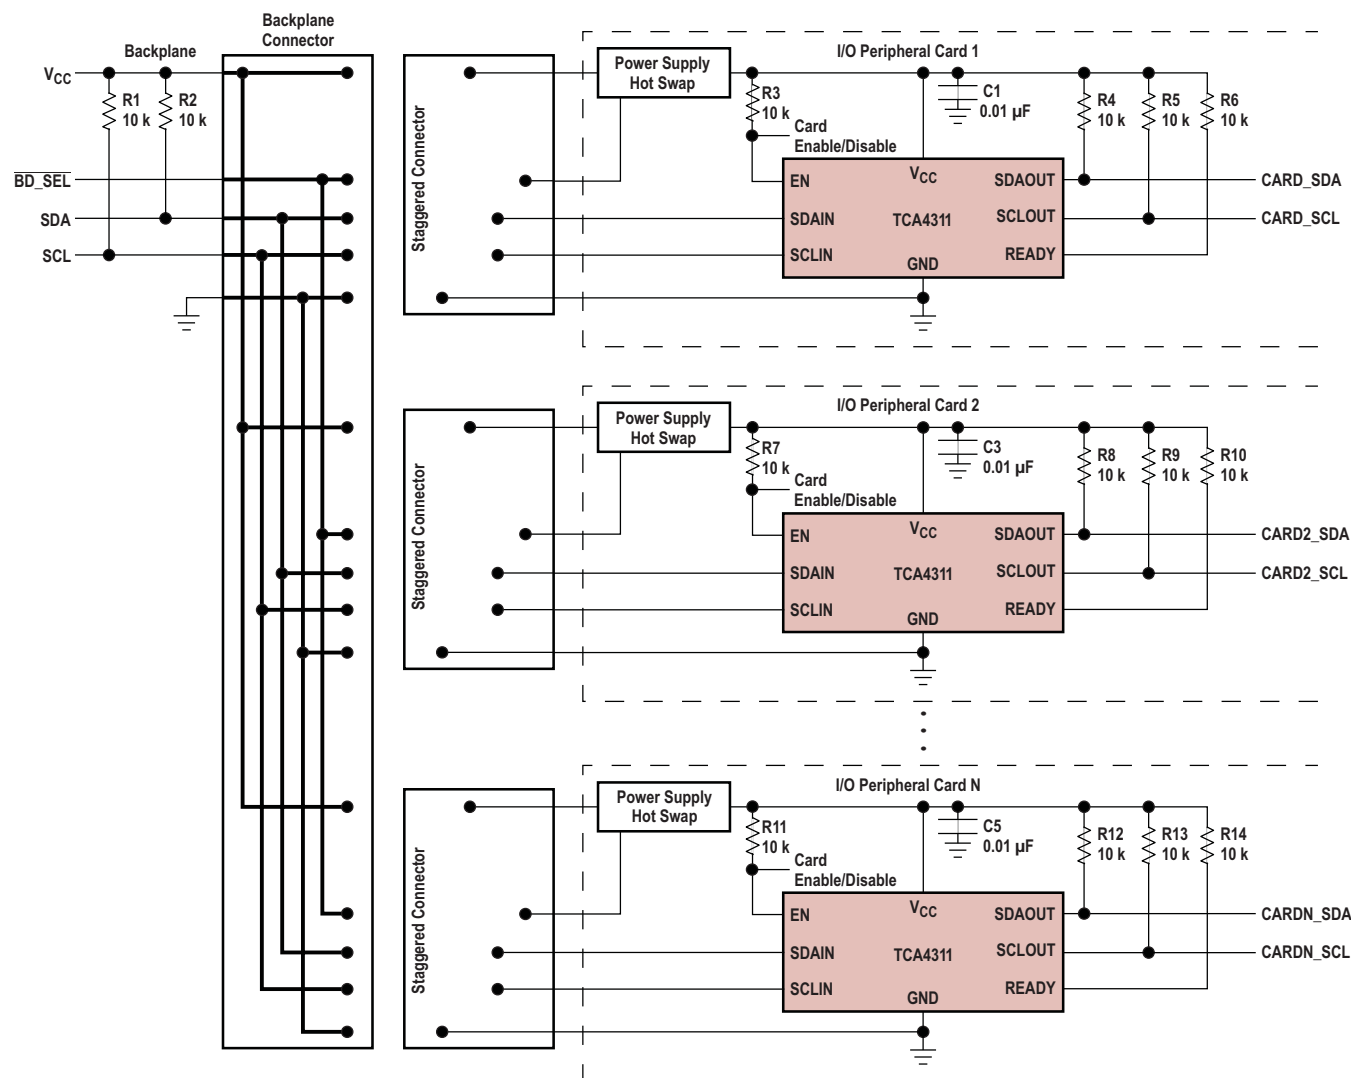


Figure 10. Inserting Multiple I/O Cards into a Live Backplane Using the TCA4311A in a CompactPCI System

Figure 11 shows the TCA4311A in a PCI application, where all of the pins have the same length. In this case, connect an RC series circuit on the I/O card between  $V_{CC}$  and EN. An RC product of 10 ms provides a filter to prevent the TCA4311A from becoming activated until the transients associated with live insertion have settled.

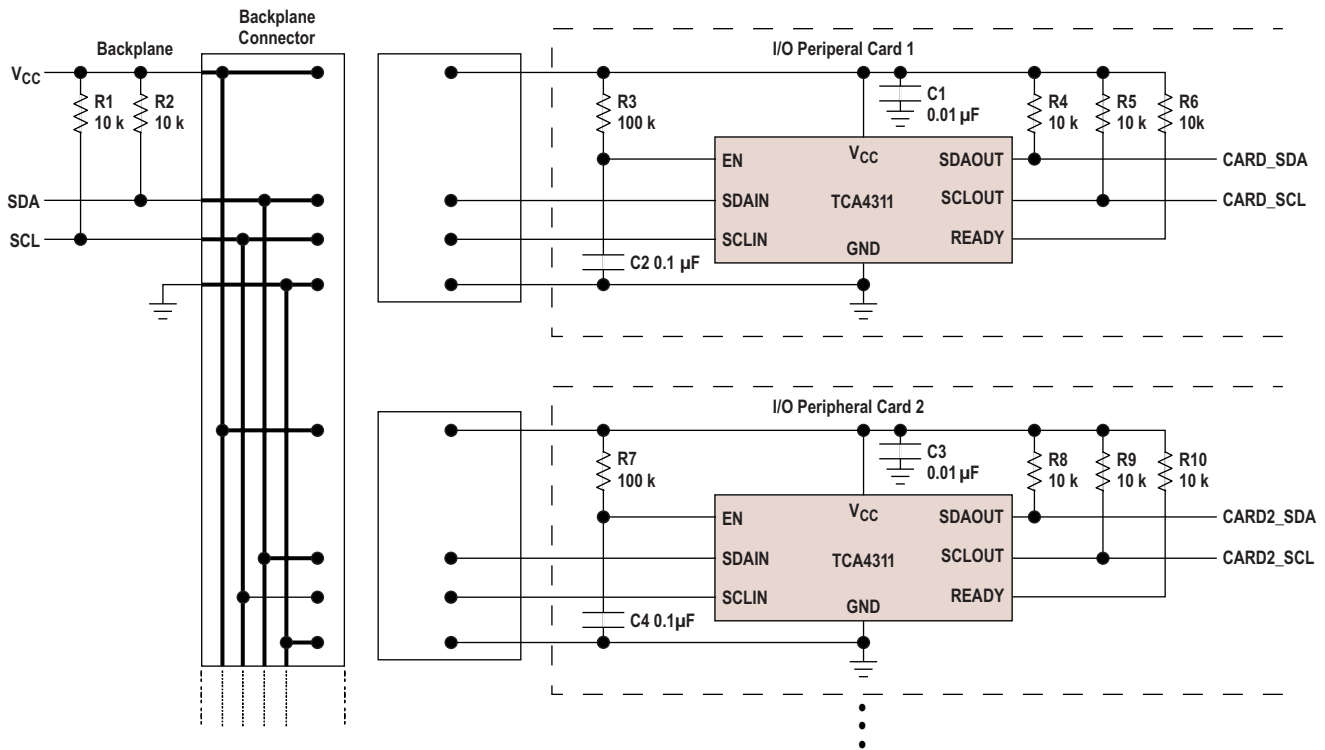


Figure 11. Inserting Multiple I/O Cards into a Live Backplane Using the TCA4311A in a PCI System

### Repeater/Bus Extender Application

Users who wish to connect two 2-wire systems separated by a distance can do so by connecting two TCA4311A back-to-back, as shown in Figure 12. The I<sup>2</sup>C specification allows for 400 pF maximum bus capacitance, severely limiting the length of the bus. The SMBus specification places no restriction on bus capacitance, but the limited impedances of devices connected to the bus require systems to remain small if rise- and fall-time specifications are to be met. The strong pullup and pulldown impedances of the TCA4311A are capable of meeting rise- and fall-time specifications for one nanofarad of capacitance, thus allowing much more interconnect distance. In this situation, the differential ground voltage between the two systems may limit the allowed distance, because a valid logic low voltage with respect to the ground at one end of the system may violate the allowed  $V_{OL}$  specification with respect to the ground at the other end. In addition, the connection circuitry offset voltages of the back-to-back TCA4311A add together, directly contributing to the same problem.

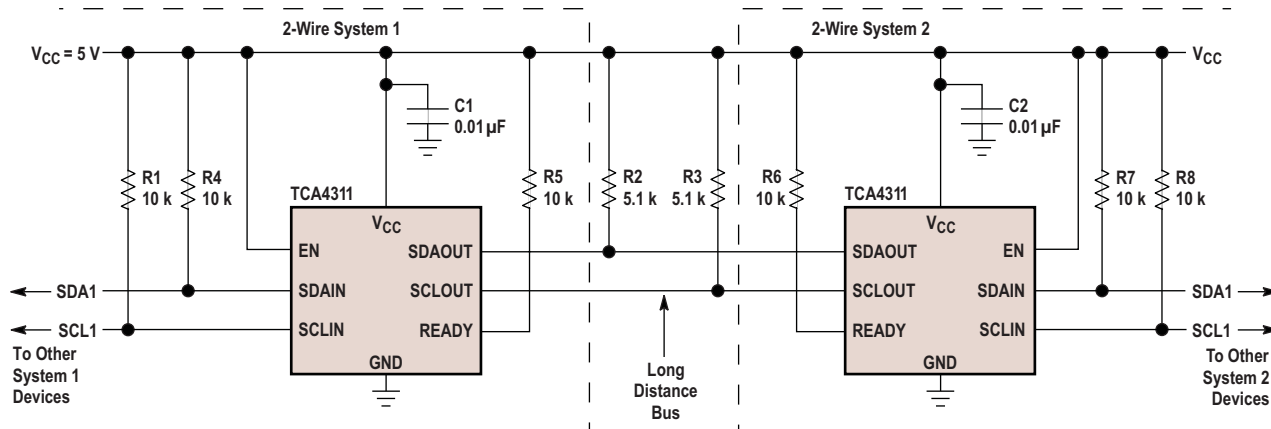


Figure 12. Repeater/Bus Extender Application



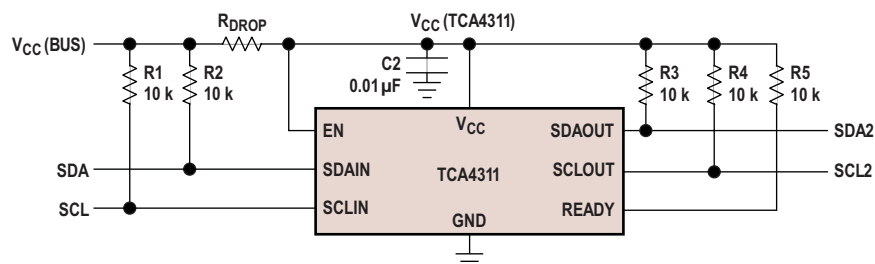


Figure 13. System With Disparate  $V_{CC}$  Voltages

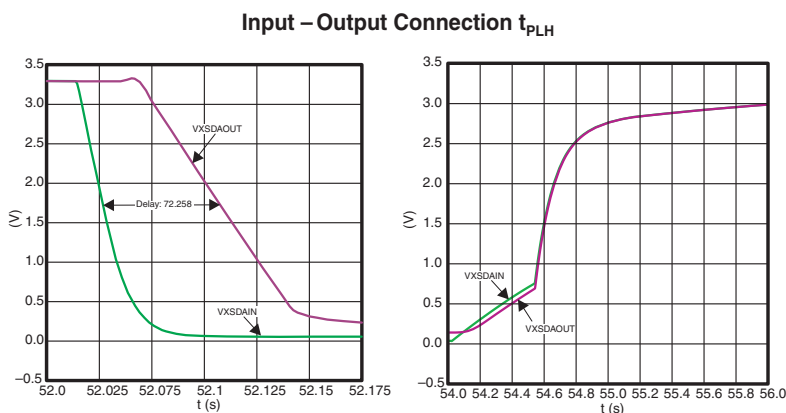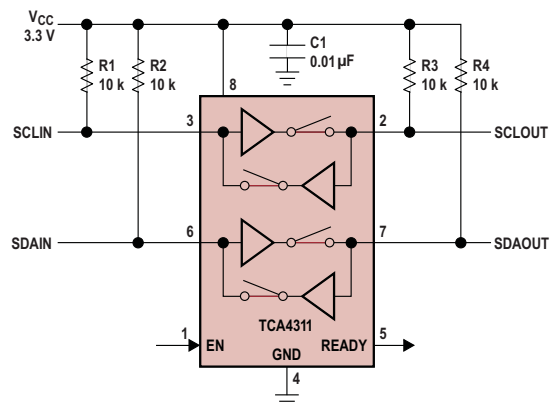

## REVISION HISTORY

### Changes from Original (January 2011) to Revision A

### Page

- Updated Input-output Offset Voltage vs Pullup Resistor graphic. .... [9](#)



## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| TCA4311AD        | PREVIEW       | SOIC         | D                  | 8    | 50             | TBD                        | Call TI          | Call TI              | -40 to 85    |                          |                         |
| TCA4311ADGKR     | ACTIVE        | VSSOP        | DGK                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | (6KS ~ 6KU)              | <a href="#">Samples</a> |
| TCA4311ADR       | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | PR311A                   | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.


**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) Multiple Top-Side Markings will be inside parentheses. Only one Top-Side Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Top-Side Marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

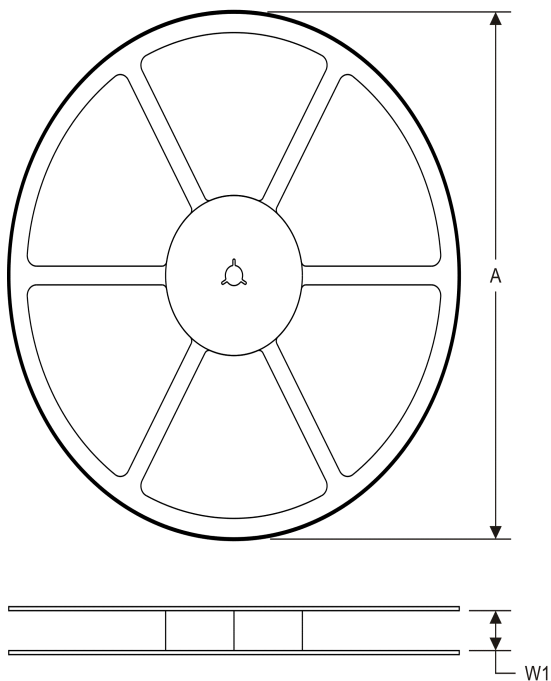**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

**TAPE DIMENSIONS**


|    |   |
|----|---|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |

**TAPE AND REEL INFORMATION**

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TCA4311ADGKR | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| TCA4311ADR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TCA4311ADGKR | VSSOP        | DGK             | 8    | 2500 | 358.0       | 335.0      | 35.0        |
| TCA4311ADR   | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |

DGK (S-PDSO-G8)

PLASTIC SMALL-OUTLINE PACKAGE



## NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 per end.
- D. Body width does not include interlead flash. Interlead flash shall not exceed 0.50 per side.
- E. Falls within JEDEC MO-187 variation AA, except interlead flash.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE



## NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- $\triangle C$  Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- $\triangle D$  Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AA.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE



- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |  |
|------------------------------|--|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>   |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>   |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |  |
|-------------------------------|--|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)