

LP38869 1A FlexCap, Low-Dropout Linear Regulator with 0.75% Accuracy

Check for Samples: [LP38869](#)

FEATURES

- Operating input supply range: +2.7V to + 5.5V
- Maximum continuous output current: 1A
- Preset output voltage of 2.5V, or Adjustable output voltage from 0.8V to 5.0V
- Pre-Set Output Initial V_{OUT} tolerance $\pm 0.5\%$
- Adjustable V_{REF} tolerance of $\pm 0.75\%$
- PSRR of 50dB at 100kHz
- Low 200 mV dropout at 1A
- Typical 2 μ A supply current in shutdown mode
- Adjustable Soft-Start for output current
- Fold-back Output Current Limit

- Stable with Ceramic, Tantalum, or Aluminum capacitors
- Stable with 1 μ F input/output capacitors
- Thermal shutdown
- 16-pin eTSSOP package

APPLICATIONS

- DSA, FPGA and MCU power supply
- SMPS post-regulator
- Applications requiring sequencing
- Gibabit SERDES termination supply

DESCRIPTION

The LP38869 low-dropout linear regulator operates with an input voltage supply from +2.7V to +5.5V input, and delivers a guaranteed 1A load current with a low 200 mV dropout. The high 50 dB PSRR at 100 kHz results from a high gain control loop that also yields excellent transient response. Coupled with a high accuracy output voltage, $\pm 0.75\%$ over temperature, the LP38869 is an ideal power supply for FPGAs, DSPs or MCUs. Output voltage is preset at +2.5V, or may be adjustable between +0.8V to +5V with an external resistor divider.


The LP38869 only needs 1 μ F output capacitance for stability. The FlexCap compensation allows the use of any type of output capacitor, regardless of ESR. Other features include: Soft-Start; delayed reset output; low-power shutdown; short-circuit protection; and thermal shutdown protection

Ground Pin Current: Typically less than 1 mA at 1A load

Shutdown Mode: Typically 2 μ A quiescent current when the $\overline{\text{SHDN}}$ pin is pulled low.

Simplified Compensation: Stable with any type of output capacitor.

Typical Application Circuit

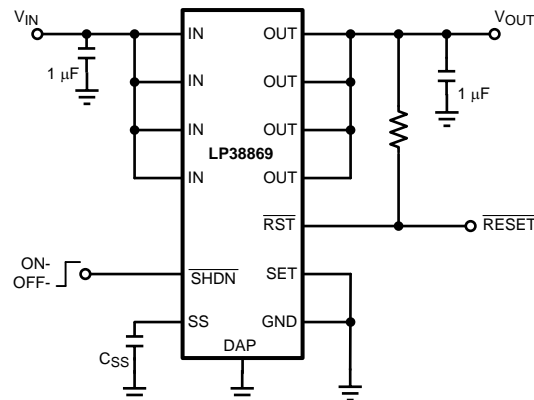

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

Connection Diagram

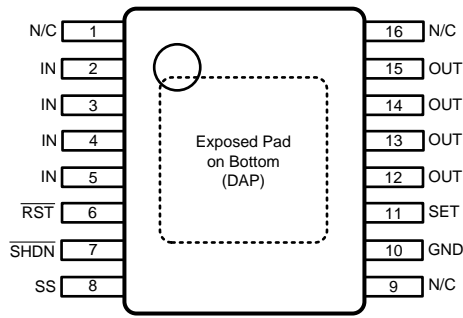


Figure 1. Top View

Table 1. Pin Descriptions for 16-Pin TSSOP-EP Packages

Pin #	Pin Name	Description	Application Information
1	N/C	No Connection	No Internal Electrical Connection
2, 3, 4, 5	IN	Positive power input	Operates from +2.7V to +5.5V. Bypass capacitor is required, located close to the package; 1 μ F is recommended as a minimum value
6	$\overline{\text{RST}}$	$\overline{\text{RESET}}$ Output	Open-drain output is low when V_{OUT} is 8% below normal regulation voltage. If regulation returns $\overline{\text{RST}}$ remains low for at least 3ms afterwards. Use large value pull-up resistor (100 k Ω) to V_{OUT} to obtain output voltage.
7	$\overline{\text{SHDN}}$	$\overline{\text{SHUTDOWN}}$ Input	A logic low state on the $\overline{\text{SHDN}}$ input will turn the regulator off, and will discharge any capacitor on the SS pin. A logic high on the SHDN pin will turn the regulator ON.
8	SS	Soft-Start control	Connect a capacitor from SS to GND. If SS is left open SS feature is disabled
9	N/C	No Connection	No Internal Electrical Connection
10	GND	Power Ground	Return connection for input and output voltages.
11	SET	Operational Mode Selection	Used to select between Pre-Set Mode or Adjustable Mode. Connect to ground (Pre-Set Mode) or to a resistor divider from V_{OUT} to SET pin to GND (Adjustable Mode).
12, 13, 14, 15	OUT	Regulated output	Regulated output voltage. A bypass capacitor is required, located close to the package; 1 μ F recommended as the minimum value
16	N/C	No Connection	No Internal Electrical Connection
DAP	Exposed Pad	Thermal Connection	Solder the DAP to a copper plane under the package to improve thermal performance. DAP can be connected to ground at device Pin 10. Optionally, but not recommended, the DAP can be left floating. Do not connect DAP to any potential other than ground. See Operating Region and Power Dissipation .



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Absolute Maximum Ratings ⁽¹⁾

V _{IN} to GND (Survival)	-0.3V to 6.0V
All other inputs to GND	-0.3V to 6.0V
Power Dissipation (Survival)	Internally Limited
I _{OUT} (Survival)	Internally Limited
ESD Rating ⁽²⁾	
Human Body Model	2 kV
Storage Temperature Range	-65°C to +150°C
Junction Temperature	150°C
Peak Reflow Temperature ⁽³⁾	260°C

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but does not guarantee specific performance limits. For guaranteed specifications and conditions, see the Electrical Characteristics.
- (2) The human body model is a 100 pF capacitor discharged through a 1.5 kΩ resistor into each pin. Test method is per JESD22-A114.
- (3) Peak Reflow Temperatures for Surface Mount devices are defined in “Absolute Maximum Ratings for Soldering”, Literature Number: SNOA549C <http://www.ti.com/lit/an/snoa549c/snoa549c.pdf>

Operating Ratings ⁽¹⁾

V _{IN} Voltage	2.7V to 5.5V
V _{SHDN} Voltage	0V to 5.5V
V _{RST} Voltage	0V to V _{IN}
Junction Temperature (T _J) ⁽²⁾	-40°C to +125°C

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but does not guarantee specific performance limits. For guaranteed specifications and conditions, see the Electrical Characteristics.
- (2) Operating junction temperature must be evaluated, and derated as needed, based on ambient temperature (T_A), power dissipation (P_D), maximum allowable operating junction temperature (T_{J(MAX)}), and package thermal resistance (θ_{JA}). See [Operating Region and Power Dissipation](#).

Electrical Characteristics

Unless otherwise specified: $V_{IN} = V_{OUT(NOM)} + 500\text{ mV}$, $V_{\overline{SHDN}} = V_{IN}$, $I_{OUT} = 10\text{ mA}$, $C_{IN} = 1\text{ }\mu\text{F MLCC}$, $C_{OUT} = 1\text{ }\mu\text{F MLCC}$, SS = Open. Limits in standard type are for $T_J = 25^\circ\text{C}$ only; limits in **boldface type** apply over the junction temperature (T_J) range of **-40°C to +125°C**. Minimum and Maximum limits are guaranteed through test, design, or statistical correlation. Typical values represent the most likely parametric norm at $T_J = 25^\circ\text{C}$, and are provided for reference purposes only.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{IN}	Input Voltage Operating Range		2.7	-	5.5	V
UVLO	Input Under-Voltage Lock-Out	V_{IN} Rising or Falling Includes Hysteresis	2.27	2.45	2.58	V
Δ UVLO	UVLO Hysteresis		-	64	-	mV
V_{OUT}	Output Voltage Accuracy (Pre-Set Mode)	$3.0\text{V} \leq V_{IN} \leq 5.5\text{V}$, $I_{OUT} = 1\text{ mA}$, $T_J = 25^\circ\text{C}$	-0.50	-	0.50	%
		$I_{OUT} = 1\text{ mA}$	-0.75	-	0.75	
V_{REF}	Regulated Feedback Voltage (Adjustable Mode)	$I_{OUT} = 150\text{ mA}$	794	800	806	mV
Δ $V_{OUT(LINE)}$	Line Regulation ⁽¹⁾	$\Delta V_{IN} = 3.0\text{ to }5.5\text{V}$	-	0.0011	-	%/V
Δ $V_{OUT(LOAD)}$	Load Regulation ⁽²⁾	$\Delta I_{OUT} = 1\text{ mA to }1\text{A}$	-	0.2	1.85	%/A
I_{GND}	Ground Pin Current	$I_{OUT} = 100\text{ }\mu\text{A}$	-	0.6	2	mA
		$I_{OUT} = 1\text{ A}$	-	0.7	-	
I_{OFF}	Shutdown Supply Current	$V_{\overline{SHDN}} = 0.0\text{V}$, $V_{IN} = +5.5\text{V}$, $V_{OUT} = 0\text{V}$	-	2	20	μA
	Adjustable Output Voltage Range	$1\text{ mA} \leq I_{OUT} \leq 1\text{ A}$	0.8	-	5	V
$I_{OUT(MAX)}$	Maximum Output Current	Continuous	1.0	-	-	A
I_{SC}	Short Circuit Current	$V_{OUT} = 0\text{V}$	1.0	1.9	-	A
I_{LIM}	In Regulation Current Limit	$V_{SET} = 0.760\text{V}$, $-40^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$	2.0	3	-	A
		$V_{SET} = 0.760\text{V}$	1.9			
$V_{SET(TH)}$	SET Dual Mode Threshold	Threshold is where SET pin voltage rising from 0.0V deactivates the Pre-Set Mode	35	87	138	mV
I_{SET}	SET Pin Bias Current	$V_{SET} = +0.900\text{V}$	-	2	300	nA
V_{DO}	Dropout Voltage ⁽³⁾	$I_{OUT} = 1\text{ mA}$	-	0.2	-	mV
		$I_{OUT} = 1.0\text{A}$	-	185	330	
$V_{\overline{SHDN}(ON)}$	\overline{SHDN} ON Threshold	$V_{\overline{SHDN}}$ rising until output is active $+2.7\text{V} \leq V_{IN} \leq +5.5\text{V}$	1.60	0.86	-	V
$V_{\overline{SHDN}(OFF)}$	\overline{SHDN} OFF Threshold	$V_{\overline{SHDN}}$ falling until output is shutdown $+2.7\text{V} \leq V_{IN} \leq +5.5\text{V}$	-	0.78	0.58	
Δ $V_{\overline{SHDN}}$	$V_{\overline{SHDN}}$ Hysteresis	$+2.7\text{V} \leq V_{IN} \leq +5.5\text{V}$	-	80	-	mV
$I_{\overline{SHDN}}$	\overline{SHDN} Input Bias Current	$V_{\overline{SHDN}} = 0\text{V}$	-	0.002	0.1	μA
		$V_{\overline{SHDN}} = 5.5\text{V}$	-	0.002	0.1	
I_{SS}	Soft-Start Charge Current	$V_{SS} = 0.0\text{V}$	-	6.7	-	μA
	\overline{RST} Output Low Voltage	$I_{\overline{RST}(SINK)} = 1\text{ mA}$	-	0.007	0.1	V
	Operating Input Voltage (V_{IN}) Range for \overline{RST} Valid	$I_{\overline{RST}(SINK)} = 10\text{ }\mu\text{A}$	1.0	-	5.5	V
$I_{\overline{RST}}$	\overline{RST} Leakage	$V_{IN} = 5.5\text{V}$, $V_{\overline{RST}} = 5.5\text{V}$	-	0.0	1	μA
$V_{\overline{RST}(TH)}$	\overline{RST} Threshold	V_{OUT} falling from $V_{OUT(NOM)}$ until \overline{RST} pin goes low	86	92	97	% OUT
Δ $V_{\overline{RST}}$	\overline{RST} Hysteresis	V_{OUT} rising from $V_{\overline{RST}(TH)}$ until \overline{RST} pin goes high	-	10	-	mV
$t_{\overline{RST}(DELAY)}$	\overline{RST} Release Delay time	Time from when V_{OUT} returns to normal to when $V_{\overline{RST}}$ goes high	1.0	3	5.5	ms

- (1) Line Regulation is the % change in V_{OUT} from $V_{OUT(NOM)}$ for every 1V change in V_{IN} , Line Regulation = $((\Delta V_{OUT} / V_{OUT(NOM)}) / \Delta V_{IN}) \times 100\%$
- (2) Load Regulation is the % change in V_{OUT} from $V_{OUT(NOM)}$ for every 1A change in I_{OUT} , Load Regulation = $((\Delta V_{OUT} / V_{OUT(NOM)}) / \Delta I_{OUT}) \times 100\%$
- (3) Dropout voltage (V_{DO}) is defined as the minimum input to output differential voltage at which the output voltage drops to 100 mV below the nominal value. For any output voltage less than 2.5V, the minimum V_{IN} operating voltage of 2.7V is the limiting factor, and dropout voltage is not a valid parameter.







Electrical Characteristics (continued)

Unless otherwise specified: $V_{IN} = V_{OUT(NOM)} + 500\text{ mV}$, $V_{\overline{SHDN}} = V_{IN}$, $I_{OUT} = 10\text{ mA}$, $C_{IN} = 1\text{ }\mu\text{F MLCC}$, $C_{OUT} = 1\text{ }\mu\text{F MLCC}$, SS = Open. Limits in standard type are for $T_J = 25^\circ\text{C}$ only; limits in **boldface type** apply over the junction temperature (T_J) range of **-40°C to +125°C**. Minimum and Maximum limits are guaranteed through test, design, or statistical correlation. Typical values represent the most likely parametric norm at $T_J = 25^\circ\text{C}$, and are provided for reference purposes only.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
AC Parameters						
PSRR	Ripple Rejection	$F = 100\text{ kHz}$, $C_{OUT} = 1\text{ }\mu\text{F Ceramic}$, $I_{OUT} = 300\text{ mA}$	-	54	-	dB
V_{NOISE}	Output Noise	$f = 10\text{ Hz to } 100\text{ kHz}$, $C_{OUT} = 1\text{ }\mu\text{F Ceramic}$, $I_{OUT} = 150\text{ mA}$	-	50	-	μV_{RMS}
Thermal Characteristics						
T_{SD}	Thermal Shutdown	T_J rising	-	160	-	°C
ΔT_{SD}	Thermal Shutdown Hysteresis	T_J falling from T_{SD}	-	15	-	







Typical Performance Characteristics

Unless otherwise specified: $T_J = 25^\circ\text{C}$, $V_{IN} = 5.0\text{V}$, $V_{SHDN} = V_{IN}$, $V_{SET} = 0.0\text{V}$, $V_{OUT} = 2.5\text{V}$, SS = Open, $C_{IN} = 1\ \mu\text{F}$, $C_{OUT} = 1\ \mu\text{F}$ MLCC, $I_{OUT} = 100\text{mA}$

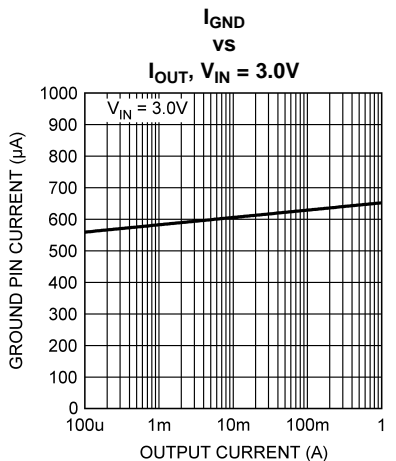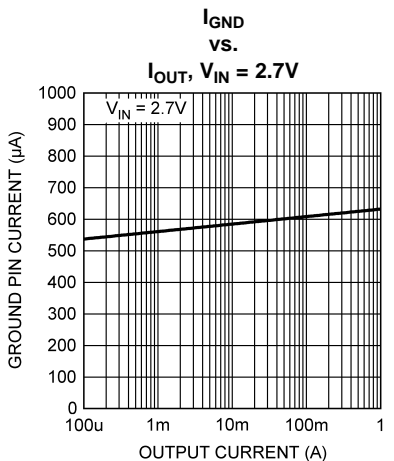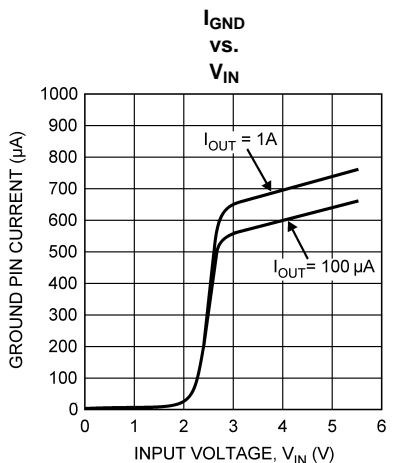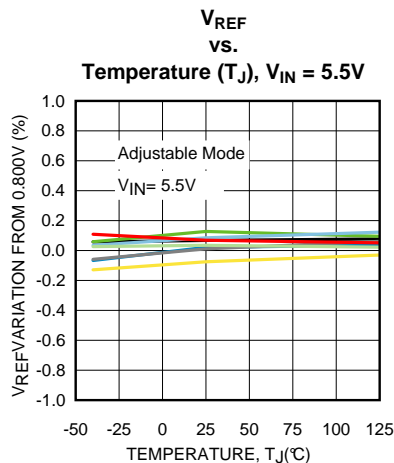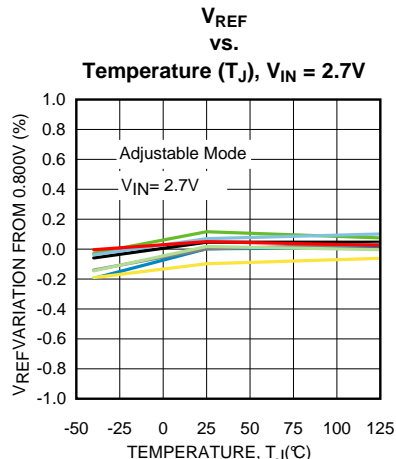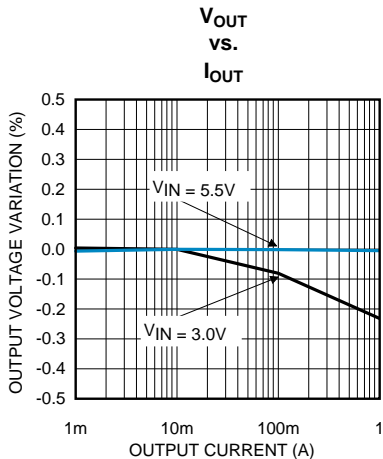

Typical Performance Characteristics (continued)


Unless otherwise specified: $T_J = 25^\circ\text{C}$, $V_{IN} = 5.0\text{V}$, $V_{SHDN} = V_{IN}$, $V_{SET} = 0.0\text{V}$, $V_{OUT} = 2.5\text{V}$, $SS = \text{Open}$, $C_{IN} = 1\ \mu\text{F}$, $C_{OUT} = 1\ \mu\text{F}$ MLCC, $I_{OUT} = 100\text{mA}$

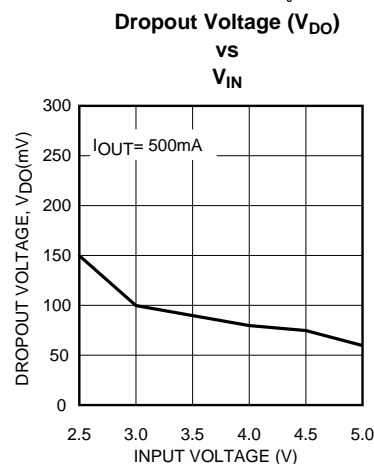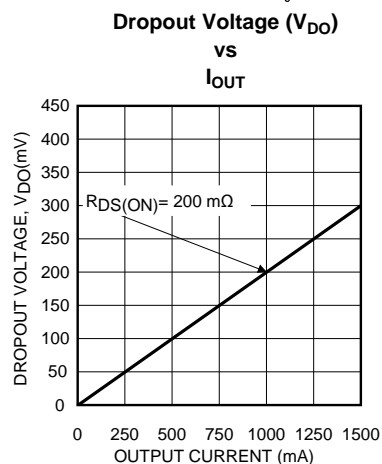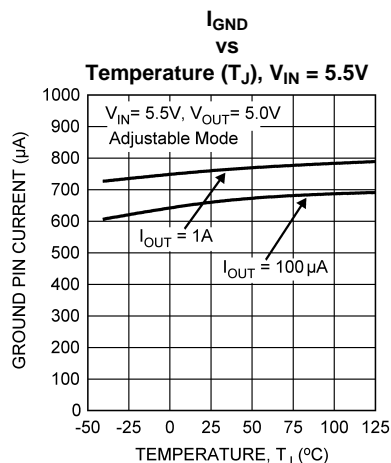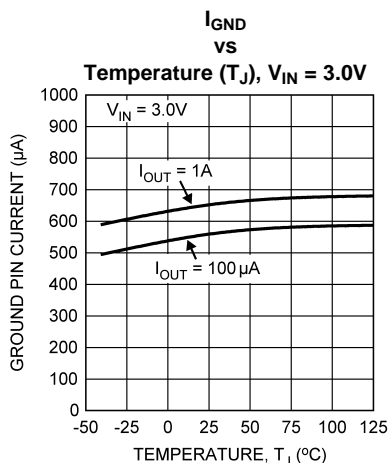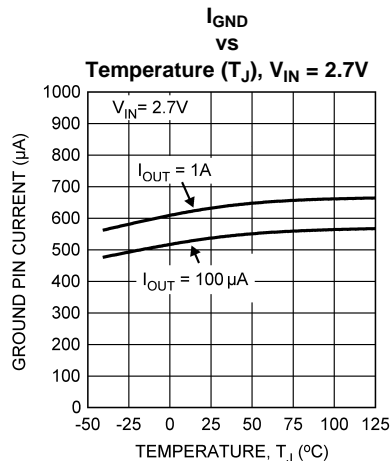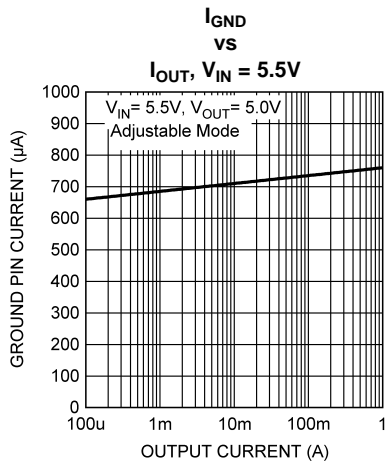


Typical Performance Characteristics (continued)

Unless otherwise specified: $T_J = 25^\circ\text{C}$, $V_{IN} = 5.0\text{V}$, $V_{SHDN} = V_{IN}$, $V_{SET} = 0.0\text{V}$, $V_{OUT} = 2.5\text{V}$, $SS = \text{Open}$, $C_{IN} = 1\ \mu\text{F}$, $C_{OUT} = 1\ \mu\text{F}$ MLCC, $I_{OUT} = 100\text{mA}$


**PSRR
vs
Frequency**

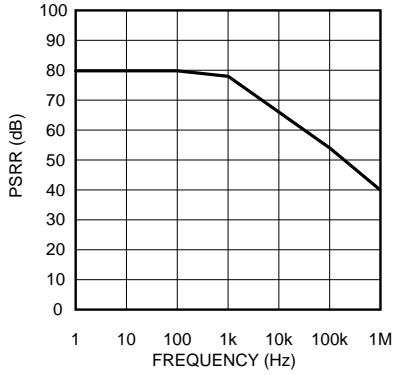


Output Noise Density

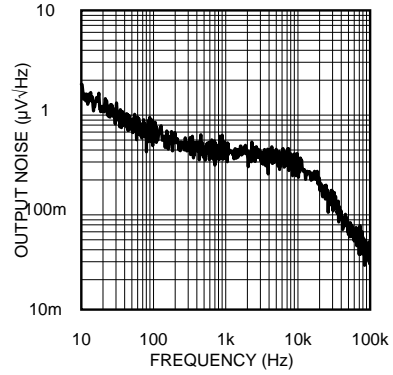


**Output Noise
vs.
 I_{OUT}**

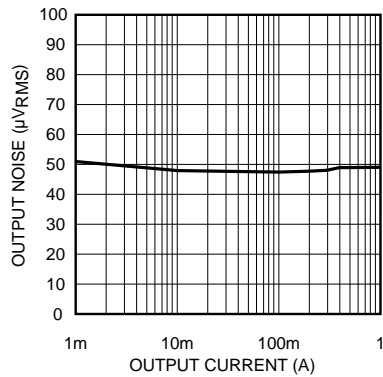


Output Noise

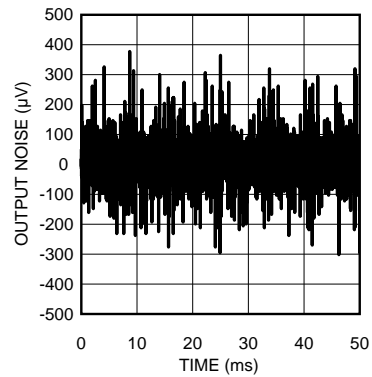

Load Transient Response, $V_{IN} = 5.0\text{V}$




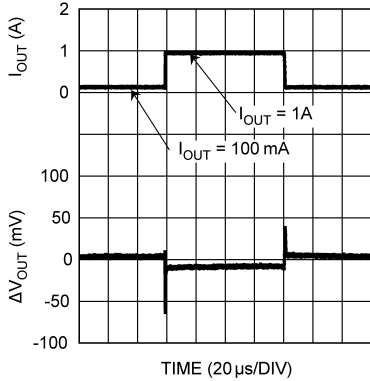


Load Transient Response, $V_{IN} = 3.0\text{V}$

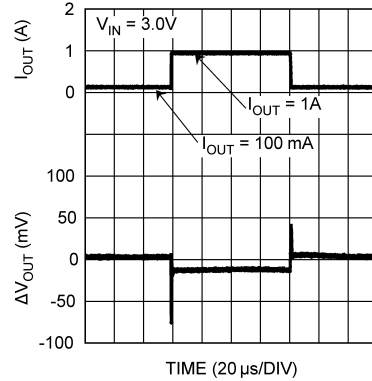


Typical Performance Characteristics (continued)


Unless otherwise specified: $T_J = 25^\circ\text{C}$, $V_{IN} = 5.0\text{V}$, $V_{SHDN} = V_{IN}$, $V_{SET} = 0.0\text{V}$, $V_{OUT} = 2.5\text{V}$, $SS = \text{Open}$, $C_{IN} = 1\ \mu\text{F}$, $C_{OUT} = 1\ \mu\text{F}$ MLCC, $I_{OUT} = 100\text{mA}$

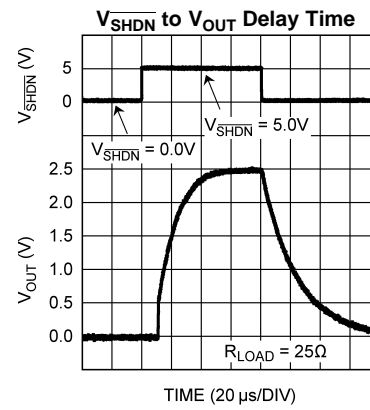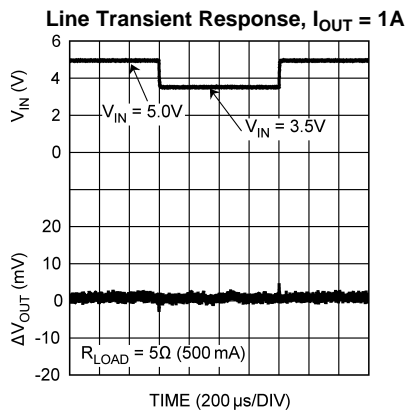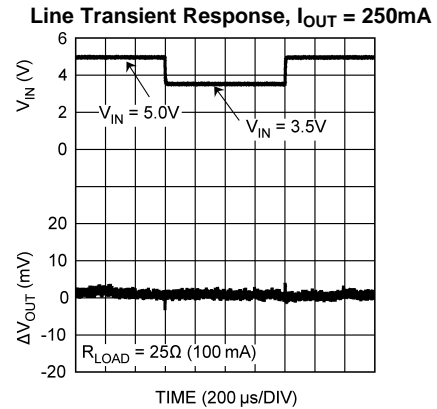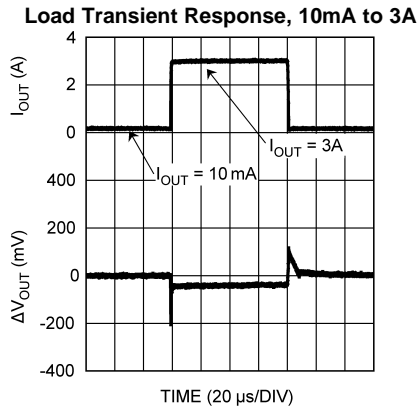

**SHDN Thresholds
vs
 V_{IN}**





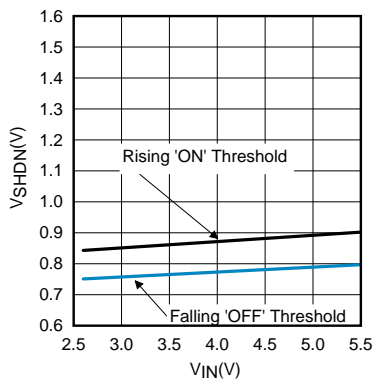


**SHDN Thresholds
vs
Temperature (T_J)**

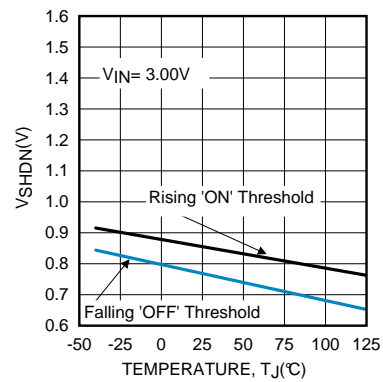

Typical Performance Characteristics (continued)

Unless otherwise specified: $T_J = 25^\circ\text{C}$, $V_{IN} = 5.0\text{V}$, $V_{SHDN} = V_{IN}$, $V_{SET} = 0.0\text{V}$, $V_{OUT} = 2.5\text{V}$, $SS = \text{Open}$, $C_{IN} = 1\ \mu\text{F}$, $C_{OUT} = 1\ \mu\text{F}$ MLCC, $I_{OUT} = 100\text{mA}$

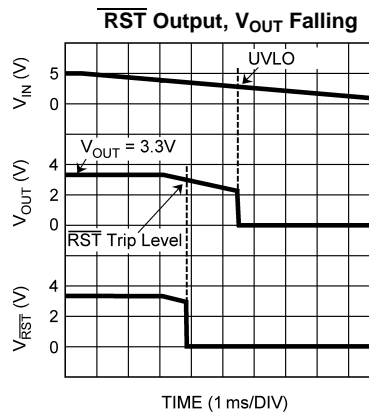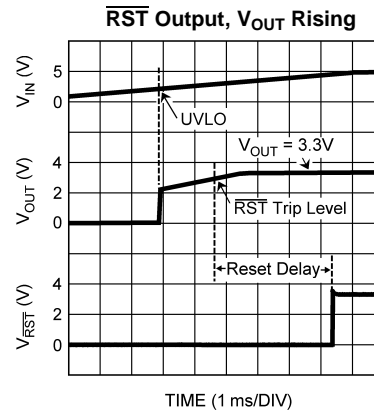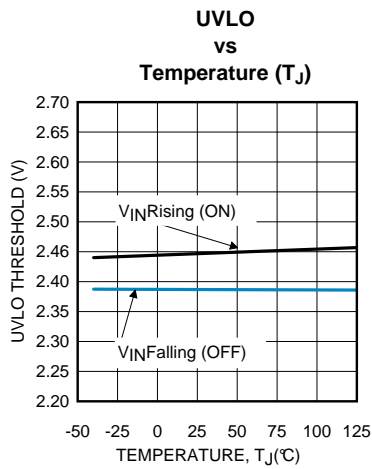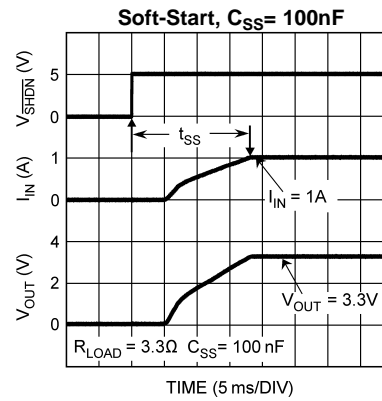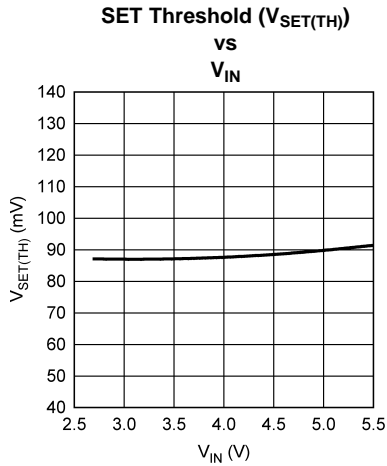

Block Diagram

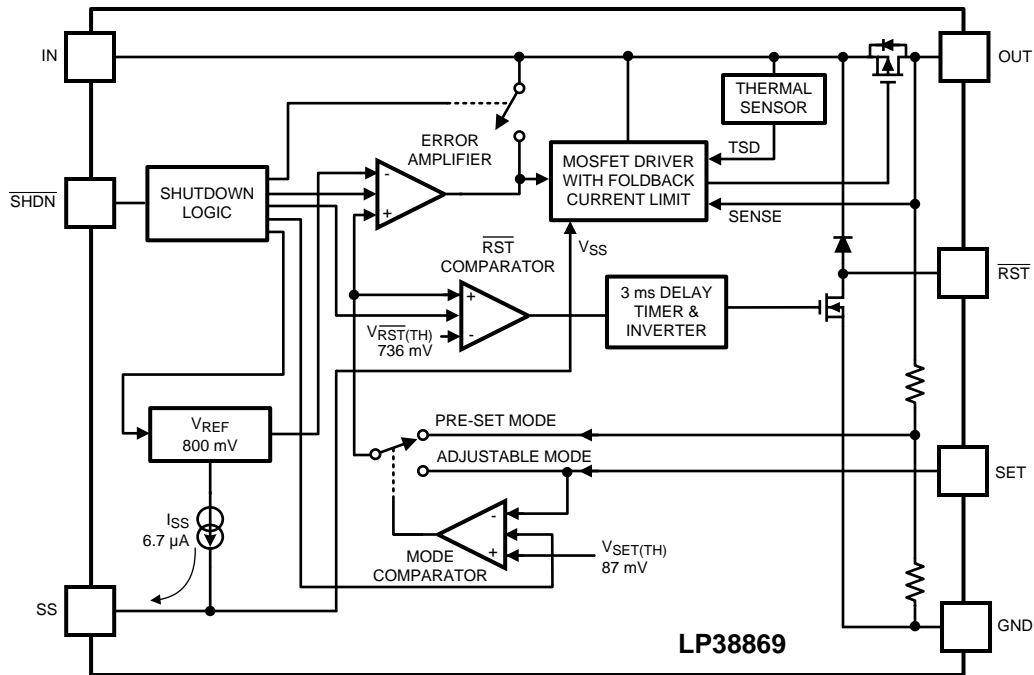


Figure 2. Functional Block Diagram

Applications Information

The LP38869 is a dual mode LDO that operates either as a fixed output, 2.5V regulator, or as an adjustable output regulator from +0.8V to +5.0V. Output current is guaranteed to be a minimum of 1A. The output requires a minimum 1 μ F of capacitance for stability.

Referring to the functional block diagram at Figure 2, the device consists of a 800 mV reference (V_{REF}), error amplifier, MOSFET driver, P-channel pass transistor, internal feedback divider, soft-start function, reset timer, and dual mode comparator, and a low V_{OUT} (RST) comparator.

With the 800 mV reference connected to the error amplifier's inverting input, the error amplifier compares this reference with the selected feedback voltage and amplifies the difference. Usually the feedback voltage is connected to the error amplifier's inverting input, but in the case of the LP38869 the logic is inverted to drive a P-channel MOSFET. The MOSFET driver takes the error amplifier output and applies the appropriate gate drive to the P-channel transistor. For a high feedback voltage, the MOSFET gate is pulled higher, allowing less current to flow to the output. The low V_{OUT} comparator senses when the feedback voltage has dropped 8% below its expected level, causing RST pin to go low. The Dual Mode comparator monitors the voltage at the SET pin and selects the feedback path. If the SET pin voltage is below the typical 87 mV threshold, the internal feedback path is used and the output voltage is regulated to the factory-preset voltage. Otherwise, the output voltage is set with the external resistor-divider.

Capacitor Selection and Regulator Stability

Capacitors are required at the LP38869's input and output. Connect a 1 μ F or greater capacitor(s) between V_{IN} and GND (C_{IN}), and between V_{OUT} and GND (C_{OUT}). Due to the LP38869's relatively high bandwidth, use only surface mount ceramic capacitors that have a low equivalent series resistance (ESR) and high self-resonant frequency (SRF). Make the input and output traces at least 2.5mm wide (the width of the four parallel pins), and connect C_{IN} and C_{OUT} within 6mm of the IC to minimize the impact of PC board trace inductance. The width of the ground trace should be maximized underneath the IC to ensure a good connection between device pin 10 (GND) and the ground side of the capacitors.

The output capacitor's ESR and SRF can affect stability and output noise. Use capacitors with a SRF of greater than 5 MHz and with an ESR of 60 mΩ or less to insure stability and optimum transient response. This is particularly true in applications with lower output voltage ($V_{OUT} < 2V$) and higher output current ($I_{OUT} > 500$ mA).

Since some capacitor dielectrics may vary over bias voltage and temperature, consult the capacitor manufacturer specifications to ensure that the capacitors meet these requirements over all voltage and temperature conditions.

Internal P-Channel Pass Transistor

The LP38869 features a 1A P-channel MOSFET pass transistor. Unlike similar designs using PNP pass transistors, P-channel MOSFETs require no continuous base (gate) drive, which reduces quiescent current. PNP based regulators also waste considerable current in dropout when the pass transistor saturates and uses a high base drive current under large loads. The LP38869 does not suffer from these problems and typically consumes only 600 uA of quiescent current, even in dropout.

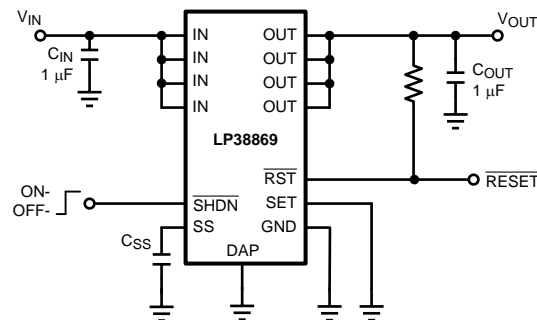


Figure 3. Typical Operating Circuit with Preset Output Voltage

Input-Output (Drop Out) Voltage

A regulator's minimum input-to-output voltage differential (dropout voltage) determines the lowest usable input voltage. In battery-powered systems, this determines the useful end-of-life battery voltage. Since a 200 mΩ P-channel MOSFET is used as the pass device, dropout voltage is the product of $R_{DS(ON)}$ and load current passing through it. The LP38869 operating current remains low in dropout.

For output voltages that are less than the UVLO threshold, the UVLO threshold itself will determine the minimum input voltage.

Output Voltage Selection

The LP38869 features Dual Mode operation. Connect the SET pin to GND as shown in Figure 3 for the Preset Mode where the output voltage is preset at the factory. In the Adjustable Mode, set the output voltage between +0.8V to +5.0V through two external resistors (R_1 and R_2) connected as a voltage divider to the SET pin as shown in Figure 4. The output voltage is set by the following equation.

$$V_{OUT} = V_{REF} \times (1 + (R_1 / R_2)) \quad (1)$$

where $V_{REF} = 800$ mV.

Solving for R_1 with a known value for R_2 :

$$R_1 = R_2 \times ((V_{OUT} / V_{REF}) - 1) \quad (2)$$

In the Adjustable Mode the current through R_1 and R_2 should be much greater than the SET pin bias current to minimize any error that the bias current may cause. Up to 10 kΩ is acceptable for R_2 , with R_1 scaled for the appropriate V_{OUT} .

In the Pre-Set voltage mode, the impedance between the SET pin and ground should be less than 10 kΩ. Otherwise, spurious conditions could cause the voltage at the SET pin to exceed the typical 87 mV Dual Mode threshold.

In the Adjustable Mode the resistors used for R1 and R2 should be high quality, tight tolerance, and with matching temperature coefficients. It is important to remember that, although the value of V_{REF} is guaranteed, the final value of V_{OUT} in the Adjustable Mode is not. The use of low quality resistors for R1 and R2 can easily produce an Adjustable Mode V_{OUT} value that is unacceptable.

Shutdown Mode

A logic low on the \overline{SHDN} pin disables the LP38869. In shutdown mode, the pass transistor, control circuitry, reference, and all bias currents are turned off, reducing supply current to typically 2 μA . Connect \overline{SHDN} to the IN pin for continuous operation if the function is not needed. In shutdown mode the \overline{RST} pin is low and the Soft-Start capacitor is discharged.

\overline{RST} Comparator

The open-drain \overline{RST} pin goes low when V_{OUT} falls 8% below its nominal output voltage. The \overline{RST} pin remains low for 3 ms after V_{OUT} has returned to its normal value. A 100 k Ω pull-up resistor from the \overline{RST} pin to a suitable logic supply voltage (typically V_{OUT}) provides a logic control signal. The \overline{RST} output logic signal can be used as a power on-reset signal to a micro-controller, or can drive an external LED for indicating a power failure. The \overline{RST} pin is low during shutdown. The \overline{RST} status remains valid for V_{IN} as low as 1V. When V_{IN} is less than 1V the \overline{RST} pin status may not be valid.

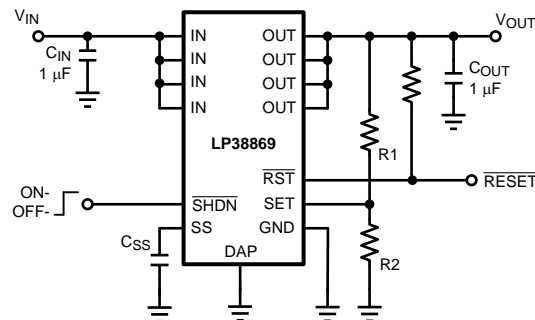


Figure 4. Typical Operating Circuit Adjustable Output Voltage

Soft-Start

As shown in [Figure 5](#), a capacitor on the SS pin allows a gradual ramp-up of the LP38869's output current, reducing the initial in-rush current peaks at startup. When \overline{SHDN} pin is driven low, the soft-start capacitor is discharged to 0.0V. When the \overline{SHDN} is driven high, or power is applied to the device, a constant 6.7 μA current charges the Soft-Start capacitor from 0.0V. The resulting linear ramp voltage on SS increases the current-limit comparator threshold, limiting the P-channel gate drive. While the voltage on the Soft-Start pin (V_{SS}) is less than approximately 300 mV there will be no output current. When V_{SS} rises above approximately 300mV, the output current limit will rise from zero to approximately 250 mA. As V_{SS} continues to rise the current limit will also rise proportionally so that when V_{SS} is at typically 1.25V the current limit will be at approximately 1A. As the current limit rises above 1A, the current limit control will pass from V_{SS} to internal biasing circuitry. See the Soft-Start Capacitor Selection section for details.

There is a delay time between when \overline{SHDN} enables the LP38869 and when Soft-Start begins ramping up the output current limit. This delay time allows the LP38869 internal biasing to fully turn on and settle. The delay time is set by the time required for the Soft-Start charge current (I_{SS}) to charge the Soft-Start capacitor from 0.0V to typically 300 mV. This delay time accounts for approximately 25% of the total Soft-Start time (t_{SS}). With a 100 nF Soft-Start capacitor, the delay is approximately 4 ms with the remainder of the t_{SS} time (approximately 15 ms) allocated to raising the output current limit from zero to 1A.

Leaving the SS pin floating (open) will disable the Soft-Start feature by setting the t_{SS} time to zero.

If the current demand from the load is significantly less than 1A, the time needed for the current limit to ramp up to meet the actual current demand, after the delay time, will be a small fraction of the t_{SS} time.

Soft-Start Capacitor Selection

Unlike typical Soft-Start circuits that control the rise of the output voltage, the LP38869 Soft-Start controls rise of the output current limit. The resulting voltage rise across the load will depend on any reactive composition of the load.

A capacitor (C_{SS}) connected from the SS pin to GND causes the LP38869's output current to slowly rise from zero during start-up, reducing stress on the power path components and input supply. Soft-Start time (t_{SS}) is defined as the time from start-up (i.e. $t = 0$) until the current limit reaches 1A. The current limit will continue to rise beyond 1A as the SS capacitor continues to charge to a higher voltage.

Typically, the current limit will be at 1A when the voltage on the SS capacitor (V_{SS}) has charged to 1.25V.

The time from start-up ($V_{SS} = 0V$) to when the output current limit reaches 1A ($V_{SS} = 1.25V$), can be estimated by:

$$t_{SS} = (C_{SS} / I_{SS}) \times 1.25V \quad (3)$$

This can be simplified to:

$$t_{SS} = 0.186 \times C_{SS} \quad (4)$$

where C_{SS} is in nF, and the calculated t_{SS} result is in milli-seconds.

Typical Soft-Start capacitor values are between 10nF to 100nF. The typical t_{SS} with a C_{SS} of 100 nF is:

$$t_{SS} = (100 \text{ nF} / 6.7 \text{ uA}) \times 1.25V = 18.6 \text{ ms} \quad (5)$$

Use of a low leakage capacitor for C_{SS} is required, and voltage rating of 5V for C_{SS} is adequate.

Because the C_{SS} ramp is applied to the output current-limit comparator, the actual time for the output voltage to ramp-up depends on the actual load current demand and output capacitor value. Leaving the SS pin open will disable the Soft-Start behavior by setting the t_{SS} time to zero.

Current Limiting

The LP38869 features a 2A current limit when the output voltage is in regulation. When the output voltage drops by 8% below its nominal value, the current limit folds back to 1.7A. While the LP38869 output can be shorted to ground for an indefinite period of time without damaging the device, power dissipation due to continuous output currents of more than 1A may stress, or damage, adjacent components. The nominal current limit can be reduced by holding the voltage at the Soft-Start (SS) pin below 1.25V. For V_{SS} rising from approximately 300 mV to 1.25V the current limits scale proportionately with the V_{SS} by:

$$I_{LIM} = 1A \times (V_{SS} / 1.25V) \quad (6)$$

Since the SS pin sources a typical 6.7 μ A current (I_{SS}), the current limit can be reduced below 1A by connecting a resistor (R_{SS}) between the SS pin and GND, so that:

$$I_{LIM} = 1A \times ((I_{SS} \times R_{SS}) / 1.25V) \quad (7)$$

where the typical $I_{SS} = 6.7 \mu$ A.

The useful range of R_{SS} values is approximately 75 k Ω to 200 k Ω . R_{SS} values less than 75 k Ω may not be able to reliably raise V_{SS} above the minimum needed (typically 300 mV) to activate the current limit. R_{SS} values greater than 200 k Ω will only have a marginal impact on the nominal current limit.

With R_{SS} in place, Soft-Start can still be achieved by placing a capacitor (C_{SS}) in parallel with R_{SS} . The output current now ramps up asymptotically to the reduced current limit rather than the nominal value, increasing the soft-start time. The time required for the current limit to reach 90% of its steady-state value with R_{SS} in place is estimated by:

$$t_{SS} = 2.5 \times R_{SS} \times C_{SS} \quad (8)$$

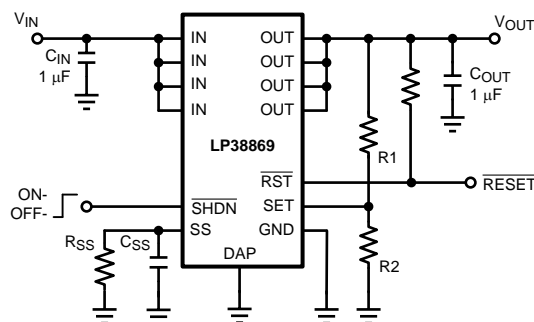


Figure 5. Typical Operating Circuit Soft-Start and Current Limit Reduction

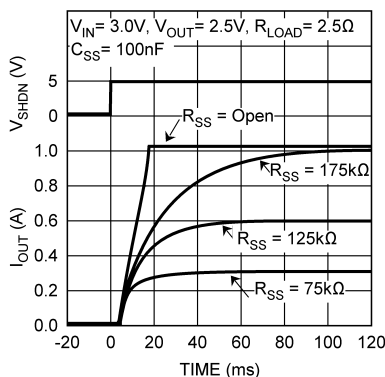


Figure 6. Typical Soft-Start Current Limit Behavior with $C_{SS} = 100 \text{ nF}$

Thermal Overload Protection

Thermal overload protection limits total power dissipation in the LP38869. When the junction temperature exceeds typically $T_J = +160^\circ\text{C}$, the thermal sensor turns off the pass transistor, allowing the LP38869 to cool. The thermal sensor turns the pass transistor on once the IC's junction temperature drops by approximately 15°C . Continuous short-circuit conditions will eventually result in a pulsed output current with a frequency that depends on the thermal resistance and thermal mass of the LP38869 package and PC board combination as well as the ambient temperature. Thermal overload protection is designed to protect the LP38869 in the event of fault conditions. For continuous operation, do not exceed the absolute maximum junction temperature rating of $T_J = 150^\circ\text{C}$. Parametric ratings are not guaranteed if the junction rises above 125°C .

Operating Region and Power Dissipation

Maximum power dissipation of the LP38869 depends on the thermal resistance of the case and circuit board, the temperature difference between the die junction and ambient air, and the rate of air flow. The power dissipation across the device is defined by:

$$P_{DISS} = I_{OUT} \times (V_{IN} - V_{OUT}) \quad (9)$$

The resulting maximum power dissipation is:

$$P_{DISS(MAX)} = (T_{J(MAX)} - T_{A(MAX)}) / (\theta_{JA}) \quad (10)$$

Where $(T_{J(MAX)} - T_{A(MAX)})$ is the maximum allowable junction temperature rise above the surrounding ambient air; and θ_{JA} is thermal resistance from the junction through the package DAP, to the PC board, copper traces, and other materials into the surrounding air.

Figure 7 uses this formula to show a range of allowable dissipation values that will keep the junction temperature ($T_{J(MAX)}$) inside the Maximum Operating Junction Temperature of 125°C.

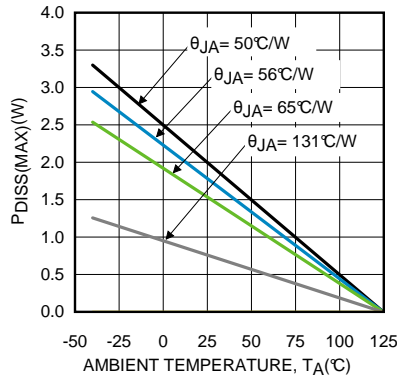


Figure 7. Maximum Dissipation vs. Ambient Temperature

Figure 8 shows the allowable power dissipation factors for a typical multi-layer PC board at ambient temperatures of +25°C, +50°C, and +70°C for the AbsMax junction temperature of 150°C.

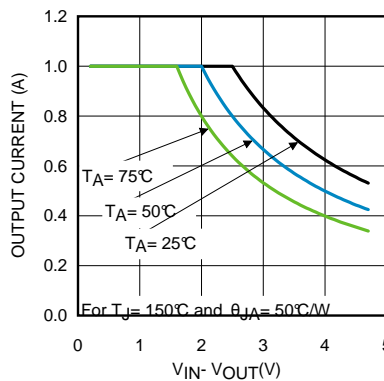


Figure 8. Maximum Output Current vs Input-Output Differential Voltage

The LP38869 TSSOP-EP package features an exposed thermal pad on its underside. This exposed pad lowers the package’s thermal resistance by providing a direct thermal heat path from the die to the PC board. Connect the exposed thermal pad to circuit ground using a large copper pad (1 square inch is the recommended minimum), or use multiple thermal vias to the ground plane of a multi-layer PCB.

For the LP38869MH in the TSSOP Exposed Pad 16-Lead package, the junction-to-case thermal rating, θ_{JC} , is 16.2°C/W, where the case is the bottom of the package at the center of the Exposed Pad. Typical junction-to-ambient thermal performance for the LP38869MH, using the JESD51 standards, is summarized in the following table.

BOARD TYPE	THERMAL VIAS	θ_{JA}
JEDEC 2-Layer JESD 51-3	None	141°C/W
JEDEC 4-Layer JESD 51-7	0	131°C/W
	1	78°C/W
	2	65°C/W
	3	59°C/W
	4	56°C/W
	6	53°C/W
	9	50°C/W

Noise, PSRR, and Transient Response

The LP38869 is designed to achieve low dropout voltage and low quiescent current in battery-powered systems while still maintaining good noise, transient response, and AC rejection (see PSRR vs. Frequency in the Typical Operating Characteristics). When operating from very noisy sources, supply noise rejection and transient response can be improved by increasing the input and output capacitor values and employing passive post filtering. The LP38869 output noise is typically $50 \mu\text{V}_{\text{RMS}}$.

Reverse Input-Output Voltage

A reverse voltage condition will exist when the voltage at the output pin is higher than the voltage at the input pin. Typically this will happen when V_{IN} is abruptly taken low and C_{OUT} continues to hold a sufficient charge such that the input to output voltage becomes reversed. Alternately, this could also happen if a secondary supply is connected to the LP38869 output.

While V_{IN} is greater than the UVLO threshold, and the $\overline{\text{SHDN}}$ pin is above the $V_{\overline{\text{SHDN}}(\text{ON})}$ threshold, the control loop circuitry will attempt to regulate the output voltage. Since the input voltage is less than the output voltage the control circuit will drive the gate of the pass element to the full ON condition when the output voltage begins to fall. In this condition, reverse current will flow from the output pin to the input pin, limited only by the $R_{\text{DS}(\text{ON})}$ of the pass element and the output to input voltage differential. This will condition will continue until V_{IN} falls below the UVLO threshold, or the $\overline{\text{SHDN}}$ pin voltage falls below the $V_{\overline{\text{SHDN}}(\text{OFF})}$ threshold.

The internal PFET pass element in the LP38869 has an inherent parasitic (body) diode. During normal operation, the input voltage is higher than the output voltage and the body diode is reverse biased. However, if the output is turned OFF, either by $V_{\text{IN}} < \text{UVLO}$ or $V_{\overline{\text{SHDN}}} < V_{\overline{\text{SHDN}}(\text{OFF})}$, and the output voltage is more than 500 mV (typical) above the input voltage the body diode becomes forward biased and current flows from the output pin to the input pin through the body diode.

The reverse current in the body diode should be limited to less than 1A continuous and less than 5A peak.

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Op Temp (°C)	Top-Side Markings (4)	Samples
LP38869MH/NOPB	ACTIVE	HTSSOP	PWP	16	92	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM		LP38869 MH	Samples
LP38869MHE/NOPB	ACTIVE	HTSSOP	PWP	16	250	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM		LP38869 MH	Samples
LP38869MHX/NOPB	ACTIVE	HTSSOP	PWP	16	2500	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM		LP38869 MH	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) Only one of markings shown within the brackets will appear on the physical device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LP38869MHE/NOPB	HTSSOP	PWP	16	250	178.0	12.4	6.95	8.3	1.6	8.0	12.0	Q1
LP38869MHX/NOPB	HTSSOP	PWP	16	2500	330.0	12.4	6.95	8.3	1.6	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LP38869MHE/NOPB	HTSSOP	PWP	16	250	203.0	190.0	41.0
LP38869MHX/NOPB	HTSSOP	PWP	16	2500	349.0	337.0	45.0

PWP0016A

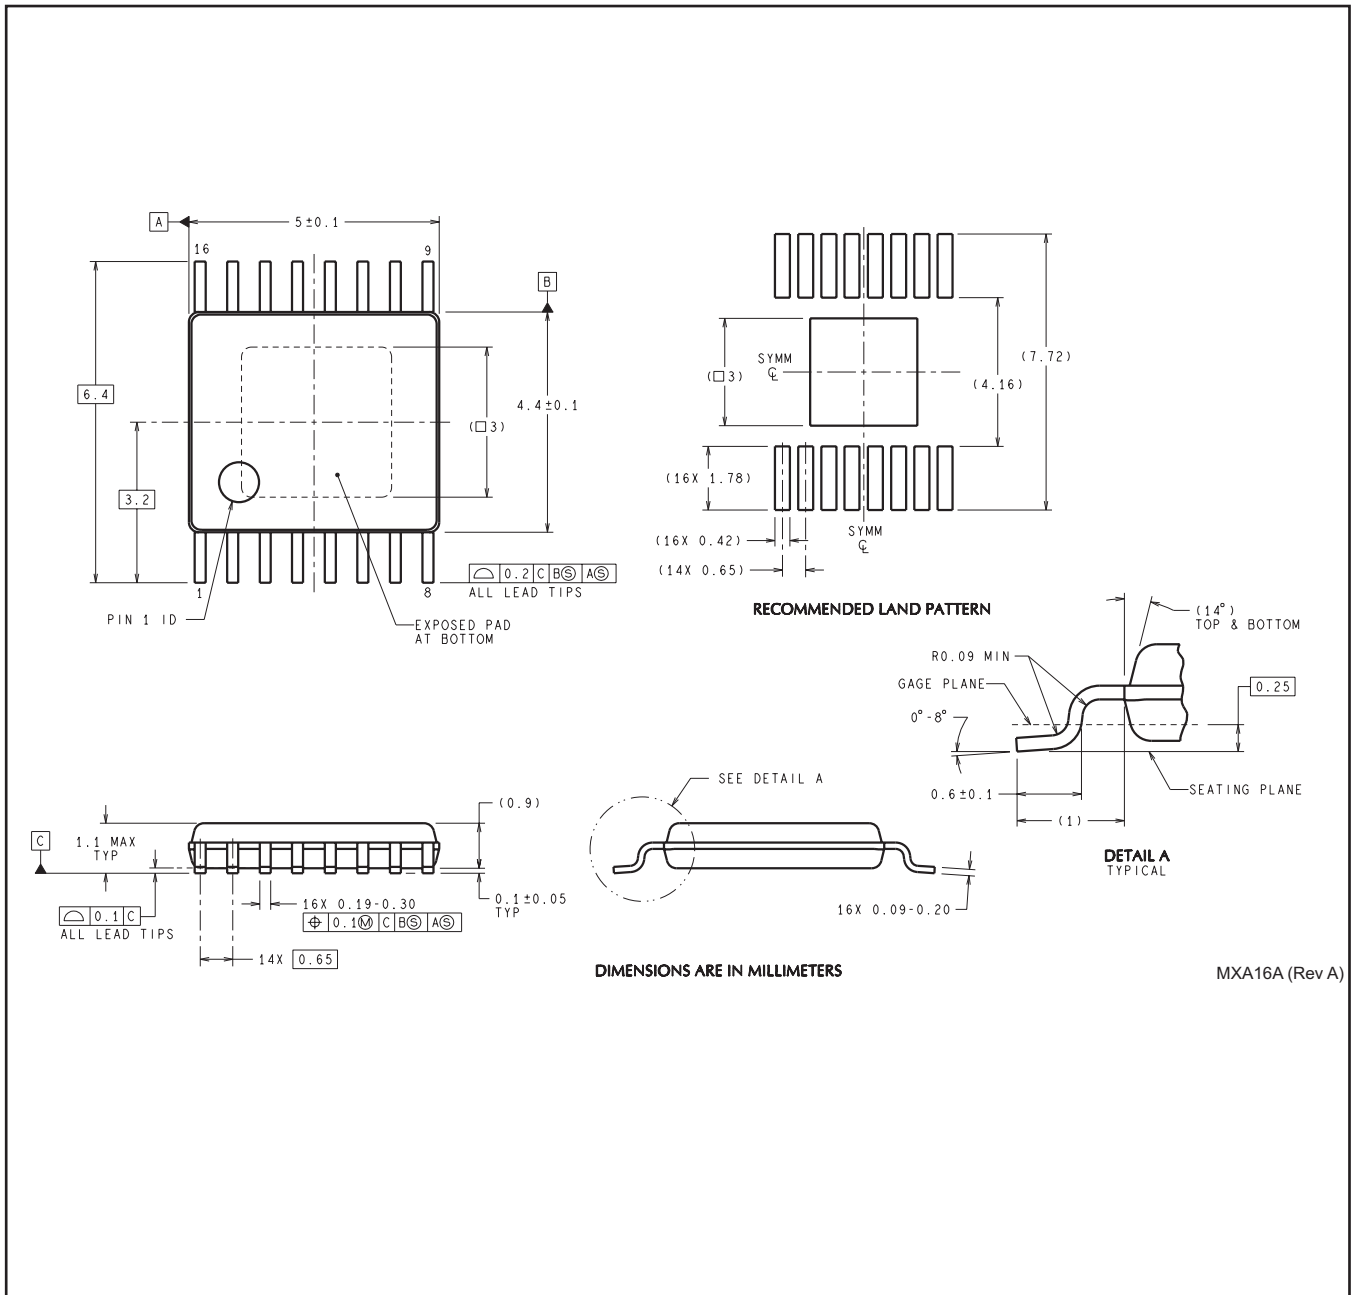

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com