

- **High-Performance Floating-Point Digital Signal Processor (DSP):**
  - TMS320VC33-150
    - 13-ns Instruction Cycle Time
    - 150 Million Floating-Point Operations Per Second (MFLOPS)
    - 75 Million Instructions Per Second (MIPS)
  - TMS320VC33-120
    - 17-ns Instruction Cycle Time
    - 120 MFLOPS
    - 60 MIPS
- **34K × 32-Bit (1.1-Mbit) On-Chip Words of Dual-Access Static Random-Access Memory (SRAM) Configured in 2 × 16K Plus 2 × 1K Blocks to Improve Internal Performance**
- **x5 Phase-Locked Loop (PLL) Clock Generator**
- **Very Low Power: < 200 mW @ 150 MFLOPS**
- **32-Bit High-Performance CPU**
- **16-/32-Bit Integer and 32-/40-Bit Floating-Point Operations**
- **Four Internally Decoded Page Strokes to Simplify Interface to I/O and Memory Devices**
- **Boot-Program Loader**
- **EDGEMODE Selectable External Interrupts**
- **32-Bit Instruction Word, 24-Bit Addresses**
- **Eight Extended-Precision Registers**
- **On-Chip Memory-Mapped Peripherals:**
  - One Serial Port
  - Two 32-Bit Timers
  - Direct Memory Access (DMA) Coprocessor for Concurrent I/O and CPU Operation
- **Fabricated Using the 0.18-μm ( $I_{eff}$ -Effective Gate Length) Timeline™ Process Technology by Texas Instruments (TI)**
- **144-Pin Low-Profile Quad Flatpack (LQFP) (PGE Suffix)**
- **Two Address Generators With Eight Auxiliary Registers and Two Auxiliary Register Arithmetic Units (ARAUs)**
- **Two Low-Power Modes**
- **Two- and Three-Operand Instructions**
- **Parallel Arithmetic/Logic Unit (ALU) and Multiplier Execution in a Single Cycle**
- **Block-Repeat Capability**
- **Zero-Overhead Loops With Single-Cycle Branches**
- **Conditional Calls and Returns**
- **Interlocked Instructions for Multiprocessing Support**
- **Bus-Control Registers Configure Strobe-Control Wait-State Generation**
- **1.8-V (Core) and 3.3-V (I/O) Supply Voltages**
- **On-Chip Scan-Based Emulation Logic, IEEE Std 1149.1† (JTAG)**

## description

The TMS320VC33 DSP is a 32-bit, floating-point processor manufactured in 0.18-μm four-level-metal CMOS (Timeline) technology. The TMS320VC33 is part of the TMS320C3x generation of DSPs from Texas Instruments.

The TMS320C3x's internal busing and special digital-signal-processing instruction set have the speed and flexibility to execute up to 150 million floating-point operations per second (MFLOPS). The TMS320VC33 optimizes speed by implementing functions in hardware that other processors implement through software or microcode. This hardware-intensive approach provides performance previously unavailable on a single chip.

The TMS320VC33 can perform parallel multiply and ALU operations on integer or floating-point data in a single cycle. Each processor also possesses a general-purpose register file, a program cache, dedicated ARAUs, internal dual-access memories, one DMA channel supporting concurrent I/O, and a short machine-cycle time. High performance and ease of use are the results of these features.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Timeline is a trademark of Texas Instruments.

Other trademarks are the property of their respective owners.

† IEEE Standard 1149.1-1990 Standard-Test-Access Port

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

Copyright © 2004, Texas Instruments Incorporated

# TMS320VC33

## DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

---

### description (continued)


General-purpose applications are greatly enhanced by the large address space, multiprocessor interface, internally and externally generated wait states, one external interface port, two timers, one serial port, and multiple-interrupt structure. The TMS320C3x supports a wide variety of system applications from host processor to dedicated coprocessor. High-level-language support is easily implemented through a register-based architecture, large address space, powerful addressing modes, flexible instruction set, and well-supported floating-point arithmetic.

The TMS320VC33 is a superset of the TMS320C31. Designers now have an additional 1M bits of on-chip SRAM, a maximum throughput of 150 MFLOPS, and several I/O enhancements that allow easy upgrades to current systems or creation of new baselines. This data sheet provides information required to fully utilize the new features of the TMS320VC33 device. For general TMS320C3x architecture and programming information, see the *TMS320C3x User's Guide* (literature number SPRU031).



POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

## pinout

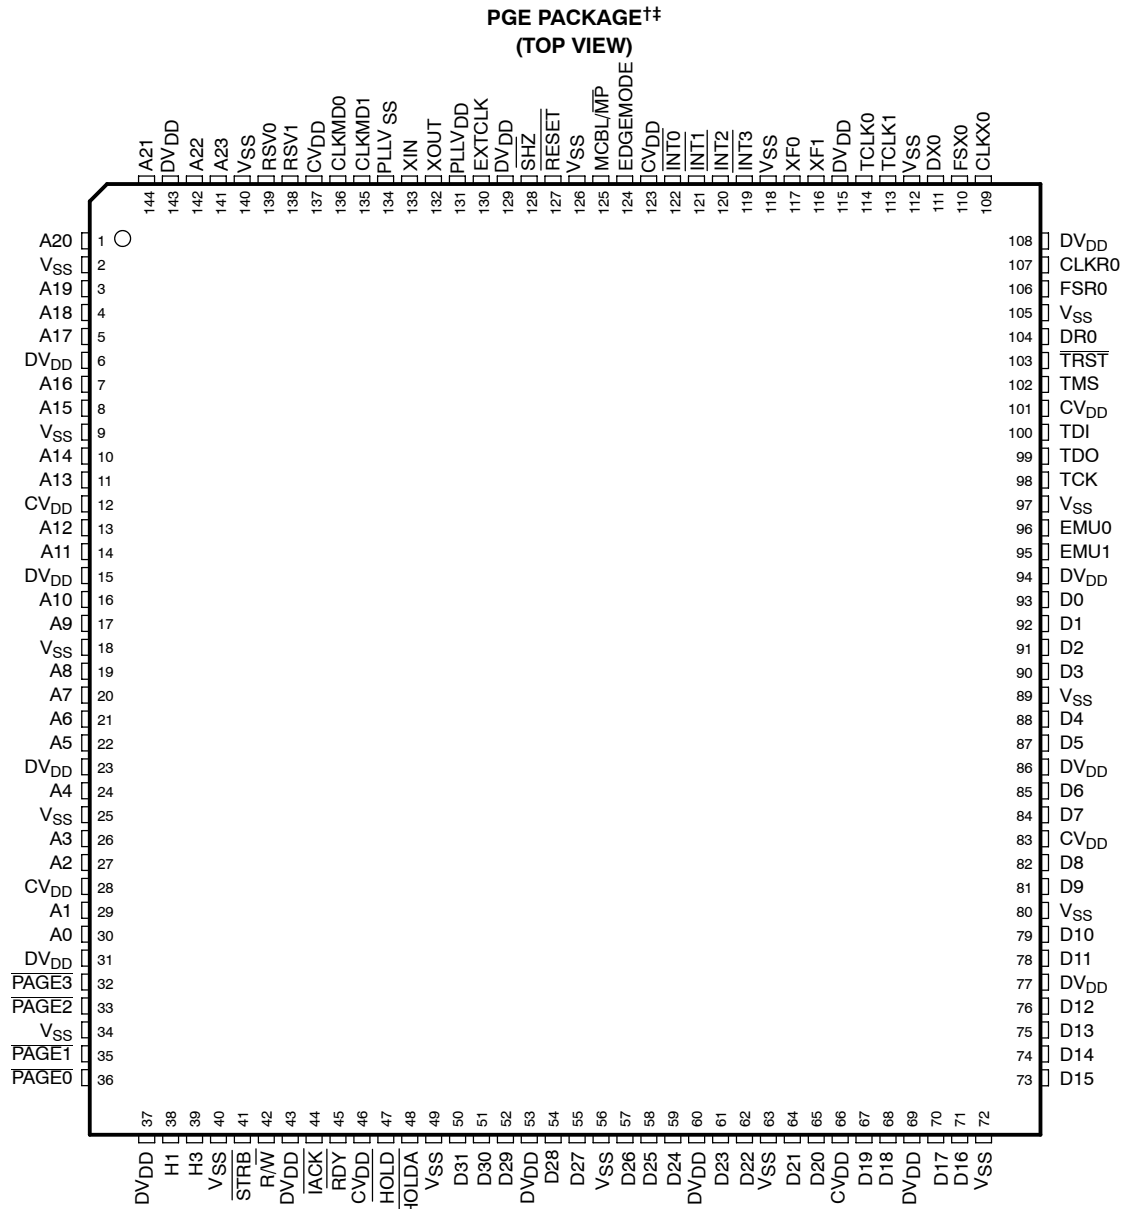

† DVDD is the power supply for the I/O pins while CVDD is the power supply for the core CPU. VSS is the ground for both the I/O pins and the core CPU.

†† PLLVDD and PLLVSS are isolated PLL supply pins that should be externally connected to CVDD and VSS, respectively.

The TMS320VC33 device is packaged in 144-pin low-profile quad flatpack (PGE Suffix).

# TMS320VC33

## DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

### Terminal Assignments<sup>†</sup> (Alphabetical)

| SIGNAL NAME      | PIN NUMBER | SIGNAL NAME      | PIN NUMBER | SIGNAL NAME                     | PIN NUMBER | SIGNAL NAME     | PIN NUMBER |
|------------------|------------|------------------|------------|---------------------------------|------------|-----------------|------------|
| A0               | 30         | D0               | 93         | DV <sub>DD</sub>                | 31         | R/W             | 42         |
| A1               | 29         | D1               | 92         |                                 | 37         | RDY             | 45         |
| A2               | 27         | D2               | 91         |                                 | 43         | RESET           | 127        |
| A3               | 26         | D3               | 90         |                                 | 53         | RSV0            | 139        |
| A4               | 24         | D4               | 88         |                                 | 60         | RSV1            | 138        |
| A5               | 22         | D5               | 87         |                                 | 69         | SHZ             | 128        |
| A6               | 21         | D6               | 85         |                                 | 77         | STRB            | 41         |
| A7               | 20         | D7               | 84         |                                 | 86         | TCK             | 98         |
| A8               | 19         | D8               | 82         |                                 | 94         | TCLK0           | 114        |
| A9               | 17         | D9               | 81         |                                 | 108        | TCLK1           | 113        |
| A10              | 16         | D10              | 79         |                                 | 115        | TDI             | 100        |
| A11              | 14         | D11              | 78         |                                 | 129        | TDO             | 99         |
| A12              | 13         | D12              | 76         |                                 | 143        | TMS             | 102        |
| A13              | 11         | D13              | 75         | DX0                             | 111        | TRST            | 103        |
| A14              | 10         | D14              | 74         | EDGEMODE                        | 124        | V <sub>SS</sub> | 2          |
| A15              | 8          | D15              | 73         | EMU0                            | 96         |                 | 9          |
| A16              | 7          | D16              | 71         | EMU1                            | 95         |                 | 18         |
| A17              | 5          | D17              | 70         | EXTCLK                          | 130        |                 | 25         |
| A18              | 4          | D18              | 68         | FSR0                            | 106        |                 | 34         |
| A19              | 3          | D19              | 67         | FSX0                            | 110        |                 | 40         |
| A20              | 1          | D20              | 65         | H1                              | 38         |                 | 49         |
| A21              | 144        | D21              | 64         | H3                              | 39         |                 | 56         |
| A22              | 142        | D22              | 62         | HOLD                            | 47         |                 | 63         |
| A23              | 141        | D23              | 61         | HOLDA                           | 48         |                 | 72         |
| CLKMD0           | 136        | D24              | 59         | IACK                            | 44         |                 | 80         |
| CLKMD1           | 135        | D25              | 58         | INT0                            | 122        |                 | 89         |
| CLKR0            | 107        | D26              | 57         | INT1                            | 121        |                 | 97         |
| CLKX0            | 109        | D27              | 55         | INT2                            | 120        |                 | 105        |
| CV <sub>DD</sub> | 12         | D28              | 54         | INT3                            | 119        |                 | 112        |
|                  | 28         | D29              | 52         | MCL/MP                          | 125        |                 | 118        |
|                  | 46         | D30              | 51         | PAGE0                           | 36         |                 | 126        |
|                  | 66         | D31              | 50         | PAGE1                           | 35         |                 | 140        |
|                  | 83         | DR0              | 104        | PAGE2                           | 33         | XIN             | 133        |
|                  | 101        | DV <sub>DD</sub> | 6          | PAGE3                           | 32         | XOUT            | 132        |
|                  | 123        |                  | 15         | PLL <sub>VDD</sub> <sup>‡</sup> | 131        | XF0             | 117        |
|                  | 137        |                  | 23         | PLL <sub>VSS</sub> <sup>‡</sup> | 134        | XF1             | 116        |

<sup>†</sup> DV<sub>DD</sub> is the power supply for the I/O pins while CV<sub>DD</sub> is the power supply for the core CPU. V<sub>SS</sub> is the ground for both the I/O pins and the core CPU.

<sup>‡</sup> PLL<sub>VDD</sub> and PLL<sub>VSS</sub> are isolated PLL supply pins that should be externally connected to CV<sub>DD</sub> and V<sub>SS</sub>, respectively.

**Terminal Assignments<sup>†</sup> (Numerical)**

| PIN<br>NUMBER | SIGNAL<br>NAME    | PIN<br>NUMBER | SIGNAL<br>NAME    | PIN<br>NUMBER | SIGNAL<br>NAME   | PIN<br>NUMBER | SIGNAL<br>NAME                  |
|---------------|-------------------|---------------|-------------------|---------------|------------------|---------------|---------------------------------|
| 1             | A20               | 37            | DV <sub>DD</sub>  | 73            | D15              | 109           | CLKX0                           |
| 2             | V <sub>SS</sub>   | 38            | H1                | 74            | D14              | 110           | FSX0                            |
| 3             | A19               | 39            | H3                | 75            | D13              | 111           | DX0                             |
| 4             | A18               | 40            | V <sub>SS</sub>   | 76            | D12              | 112           | V <sub>SS</sub>                 |
| 5             | A17               | 41            | STR <sub>B</sub>  | 77            | DV <sub>DD</sub> | 113           | TCLK1                           |
| 6             | DV <sub>DD</sub>  | 42            | R/W               | 78            | D11              | 114           | TCLK0                           |
| 7             | A16               | 43            | DV <sub>DD</sub>  | 79            | D10              | 115           | DV <sub>DD</sub>                |
| 8             | A15               | 44            | TACK              | 80            | V <sub>SS</sub>  | 116           | XF1                             |
| 9             | V <sub>SS</sub>   | 45            | RDY               | 81            | D9               | 117           | XF0                             |
| 10            | A14               | 46            | CV <sub>DD</sub>  | 82            | D8               | 118           | V <sub>SS</sub>                 |
| 11            | A13               | 47            | HOLD              | 83            | CV <sub>DD</sub> | 119           | INT <sub>3</sub>                |
| 12            | CV <sub>DD</sub>  | 48            | HOLD <sub>A</sub> | 84            | D7               | 120           | INT <sub>2</sub>                |
| 13            | A12               | 49            | V <sub>SS</sub>   | 85            | D6               | 121           | INT <sub>1</sub>                |
| 14            | A11               | 50            | D31               | 86            | DV <sub>DD</sub> | 122           | INT <sub>0</sub>                |
| 15            | DV <sub>DD</sub>  | 51            | D30               | 87            | D5               | 123           | CV <sub>DD</sub>                |
| 16            | A10               | 52            | D29               | 88            | D4               | 124           | EDGEMODE                        |
| 17            | A9                | 53            | DV <sub>DD</sub>  | 89            | V <sub>SS</sub>  | 125           | MCBL/MP                         |
| 18            | V <sub>SS</sub>   | 54            | D28               | 90            | D3               | 126           | V <sub>SS</sub>                 |
| 19            | A8                | 55            | D27               | 91            | D2               | 127           | RESET                           |
| 20            | A7                | 56            | V <sub>SS</sub>   | 92            | D1               | 128           | SHZ                             |
| 21            | A6                | 57            | D26               | 93            | D0               | 129           | DV <sub>DD</sub>                |
| 22            | A5                | 58            | D25               | 94            | DV <sub>DD</sub> | 130           | EXTCLK                          |
| 23            | DV <sub>DD</sub>  | 59            | D24               | 95            | EMU1             | 131           | PLL <sub>VDD</sub> <sup>‡</sup> |
| 24            | A4                | 60            | DV <sub>DD</sub>  | 96            | EMU0             | 132           | XOUT                            |
| 25            | V <sub>SS</sub>   | 61            | D23               | 97            | V <sub>SS</sub>  | 133           | XIN                             |
| 26            | A3                | 62            | D22               | 98            | TCK              | 134           | PLL <sub>VSS</sub> <sup>‡</sup> |
| 27            | A2                | 63            | V <sub>SS</sub>   | 99            | TDO              | 135           | CLKMD1                          |
| 28            | CV <sub>DD</sub>  | 64            | D21               | 100           | TDI              | 136           | CLKMD0                          |
| 29            | A1                | 65            | D20               | 101           | CV <sub>DD</sub> | 137           | CV <sub>DD</sub>                |
| 30            | A0                | 66            | CV <sub>DD</sub>  | 102           | TMS              | 138           | RSV1                            |
| 31            | DV <sub>DD</sub>  | 67            | D19               | 103           | TRST             | 139           | RSV0                            |
| 32            | PAGE <sub>3</sub> | 68            | D18               | 104           | DR0              | 140           | V <sub>SS</sub>                 |
| 33            | PAGE <sub>2</sub> | 69            | DV <sub>DD</sub>  | 105           | V <sub>SS</sub>  | 141           | A23                             |
| 34            | V <sub>SS</sub>   | 70            | D17               | 106           | FSR0             | 142           | A22                             |
| 35            | PAGE <sub>1</sub> | 71            | D16               | 107           | CLKR0            | 143           | DV <sub>DD</sub>                |
| 36            | PAGE <sub>0</sub> | 72            | V <sub>SS</sub>   | 108           | DV <sub>DD</sub> | 144           | A21                             |

<sup>†</sup> DV<sub>DD</sub> is the power supply for the I/O pins while CV<sub>DD</sub> is the power supply for the core CPU. V<sub>SS</sub> is the ground for both the I/O pins and the core CPU.

<sup>‡</sup> PLL<sub>VDD</sub> and PLL<sub>VSS</sub> are isolated PLL supply pins that should be externally connected to CV<sub>DD</sub> and V<sub>SS</sub>, respectively.

# TMS320VC33

## DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

### Terminal Functions

| TERMINAL<br>NAME      | QTY | TYPE† | DESCRIPTION                                                                                                                                                                                                                                                                                                                                  | CONDITIONS<br>WHEN<br>SIGNAL IS Z TYPE‡ |
|-----------------------|-----|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| PRIMARY-BUS INTERFACE |     |       |                                                                                                                                                                                                                                                                                                                                              |                                         |
| D31-D0                | 32  | I/O/Z | 32-bit data port<br>Data port bus keepers (See Figure 9)                                                                                                                                                                                                                                                                                     | S H R                                   |
| A23-A0                | 24  | O/Z   | 24-bit address port                                                                                                                                                                                                                                                                                                                          | S H R                                   |
| R/W                   | 1   | O/Z   | Read/write. R/W is high when a read is performed and low when a write is performed over the parallel interface.                                                                                                                                                                                                                              | S H R                                   |
| STRB                  | 1   | O/Z   | Strobe. For all external-accesses                                                                                                                                                                                                                                                                                                            | S H                                     |
| PAGE0 -<br>PAGE3      | 1   | O/Z   | Page strobes. Four decoded page strobes for external access.                                                                                                                                                                                                                                                                                 | S H R                                   |
| RDY                   | 1   | I     | Ready. RDY indicates that the external device is prepared for a transaction completion.                                                                                                                                                                                                                                                      |                                         |
| HOLD                  | 1   | I     | Hold. When HOLD is a logic low, any ongoing transaction is completed. A23-A0, D31-D0, STRB, and R/W are placed in the high-impedance state and all transactions over the primary-bus interface are held until HOLD becomes a logic high or until the NOHOLD bit of the primary-bus-control register is set.                                  |                                         |
| HOLDA                 | 1   | O/Z   | Hold acknowledge. HOLDA is generated in response to a logic-low on HOLD. HOLDA indicates that A23-A0, D31-D0, STRB, and R/W are in the high-impedance state and that all transactions over the bus are held. HOLDA is high in response to a logic-high of HOLD or the NOHOLD bit of the primary-bus-control register is set.                 | S                                       |
| CONTROL SIGNALS       |     |       |                                                                                                                                                                                                                                                                                                                                              |                                         |
| RESET                 | 1   | I     | Reset. When RESET is a logic low, the device is in the reset condition. When RESET becomes a logic high, execution begins from the location specified by the reset vector.                                                                                                                                                                   |                                         |
| EDGEMODE              | 1   | I     | Edge mode. Enables interrupt edge mode detection.                                                                                                                                                                                                                                                                                            |                                         |
| INT3-INT0             | 4   | I     | External interrupts                                                                                                                                                                                                                                                                                                                          |                                         |
| IACK                  | 1   | O/Z   | Interrupt acknowledge. IACK is generated by the IACK instruction. IACK can be used to indicate when a section of code is being executed.                                                                                                                                                                                                     | S                                       |
| MCBL/MP               | 1   | I     | Microcomputer Bootloader/microprocessor mode-select                                                                                                                                                                                                                                                                                          |                                         |
| SHZ                   | 1   | I     | Shutdown high impedance. When active, SHZ places all pins in the high-impedance state. SHZ can be used for board-level testing or to ensure that no dual-drive conditions occur. <b>CAUTION:</b> A low on SHZ corrupts the device memory and register contents. Reset the device with SHZ high to restore it to a known operating condition. |                                         |
| XF1, XF0              | 2   | I/O/Z | External flags. XF1 and XF0 are used as general-purpose I/Os or to support interlocked processor instruction.                                                                                                                                                                                                                                | S R                                     |
| SERIAL PORT 0 SIGNALS |     |       |                                                                                                                                                                                                                                                                                                                                              |                                         |
| CLKR0                 | 1   | I/O/Z | Serial port 0 receive clock. CLKR0 is the serial shift clock for the serial port 0 receiver.                                                                                                                                                                                                                                                 | S R                                     |
| CLKX0                 | 1   | I/O/Z | Serial port 0 transmit clock. CLKX0 is the serial shift clock for the serial port 0 transmitter.                                                                                                                                                                                                                                             | S R                                     |
| DR0                   | 1   | I/O/Z | Data-receive. Serial port 0 receives serial data on DR0.                                                                                                                                                                                                                                                                                     | S R                                     |
| DX0                   | 1   | I/O/Z | Data-transmit output. Serial port 0 transmits serial data on DX0.                                                                                                                                                                                                                                                                            | S R                                     |
| FSR0                  | 1   | I/O/Z | Frame-synchronization pulse for receive. The FSR0 pulse initiates the data-receive process using DR0.                                                                                                                                                                                                                                        | S R                                     |
| FSX0                  | 1   | I/O/Z | Frame-synchronization pulse for transmit. The FSX0 pulse initiates the data-transmit process using DX0.                                                                                                                                                                                                                                      | S R                                     |

† I = input, O = output, Z = high-impedance state

‡ S = SHZ active, H = HOLD active, R = RESET active

§ Recommended decoupling. Four 0.1 µF for CV<sub>DD</sub> and eight 0.1 µF for DV<sub>DD</sub>.



### Terminal Functions (Continued)

| TERMINAL<br>NAME                     | QTY | TYPE† | DESCRIPTION                                                                                                                             | CONDITIONS<br>WHEN<br>SIGNAL IS Z TYPE‡ |
|--------------------------------------|-----|-------|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| <b>TIMER SIGNALS</b>                 |     |       |                                                                                                                                         |                                         |
| TCLK0                                | 1   | I/O/Z | Timer clock 0. As an input, TCLK0 is used by timer 0 to count external pulses. As an output, TCLK0 outputs pulses generated by timer 0. | S R                                     |
| TCLK1                                | 1   | I/O/Z | Timer clock 1. As an input, TCLK1 is used by timer 1 to count external pulses. As an output, TCLK1 outputs pulses generated by timer 1. | S R                                     |
| <b>SUPPLY AND OSCILLATOR SIGNALS</b> |     |       |                                                                                                                                         |                                         |
| H1                                   | 1   | O/Z   | External H1 clock                                                                                                                       | S                                       |
| H3                                   | 1   | O/Z   | External H3 clock                                                                                                                       | S                                       |
| CV <sub>DD</sub>                     | 8   | I     | +V <sub>DD</sub> . Dedicated 1.8-V power supply for the core CPU. All must be connected to a common supply plane.§                      |                                         |
| DV <sub>DD</sub>                     | 16  | I     | +V <sub>DD</sub> . Dedicated 3.3-V power supply for the I/O pins. All must be connected to a common supply plane.§                      |                                         |
| V <sub>SS</sub>                      | 18  | I     | Ground. All grounds must be connected to a common ground plane.                                                                         |                                         |
| PLL <sub>VDD</sub>                   | 1   | I     | Internally isolated PLL supply. Connect to CV <sub>DD</sub> (1.8 V)                                                                     |                                         |
| PLL <sub>VSS</sub>                   | 1   | I     | Internally isolated PLL ground. Connect to V <sub>SS</sub>                                                                              |                                         |
| EXTCLK                               | 1   | I     | External clock. Logic level compatible clock input. If the XIN/XOUT oscillator is used, tie this pin to ground.                         |                                         |
| XOUT                                 | 1   | O     | Clock out. Output from the internal-crystal oscillator. If a crystal is not used, XOUT should be left unconnected.                      |                                         |
| XIN                                  | 1   | I     | Clock in. Internal-oscillator input from a crystal. If EXTCLK is used, tie this pin to ground.                                          |                                         |
| CLKMD0,<br>CLKMD1                    | 2   | I     | Clock mode select pins                                                                                                                  |                                         |
| RSV0 - RSV1                          | 2   | I     | Reserved. Use individual pullups to DV <sub>DD</sub> .                                                                                  |                                         |
| <b>JTAG EMULATION</b>                |     |       |                                                                                                                                         |                                         |
| EMU1-EMU0                            | 2   | I/O   | Emulation pins 0 and 1, use individual pullups to DV <sub>DD</sub>                                                                      |                                         |
| TDI                                  | 1   | I     | Test data input                                                                                                                         |                                         |
| TDO                                  | 1   | O     | Test data output                                                                                                                        |                                         |
| TCK                                  | 1   | I     | Test clock                                                                                                                              |                                         |
| TMS                                  | 1   | I     | Test mode select                                                                                                                        |                                         |
| TRST                                 | 1   | I     | Test reset                                                                                                                              |                                         |

† I = input, O = output, Z = high-impedance state


‡ S =  $\overline{\text{SHZ}}$  active, H =  $\overline{\text{HOLD}}$  active, R =  $\overline{\text{RESET}}$  active

§ Recommended decoupling. Four 0.1  $\mu\text{F}$  for CV<sub>DD</sub> and eight 0.1  $\mu\text{F}$  for DV<sub>DD</sub>.

# TMS320VC33 DIGITAL SIGNAL PROCESSOR


SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

## functional block diagram

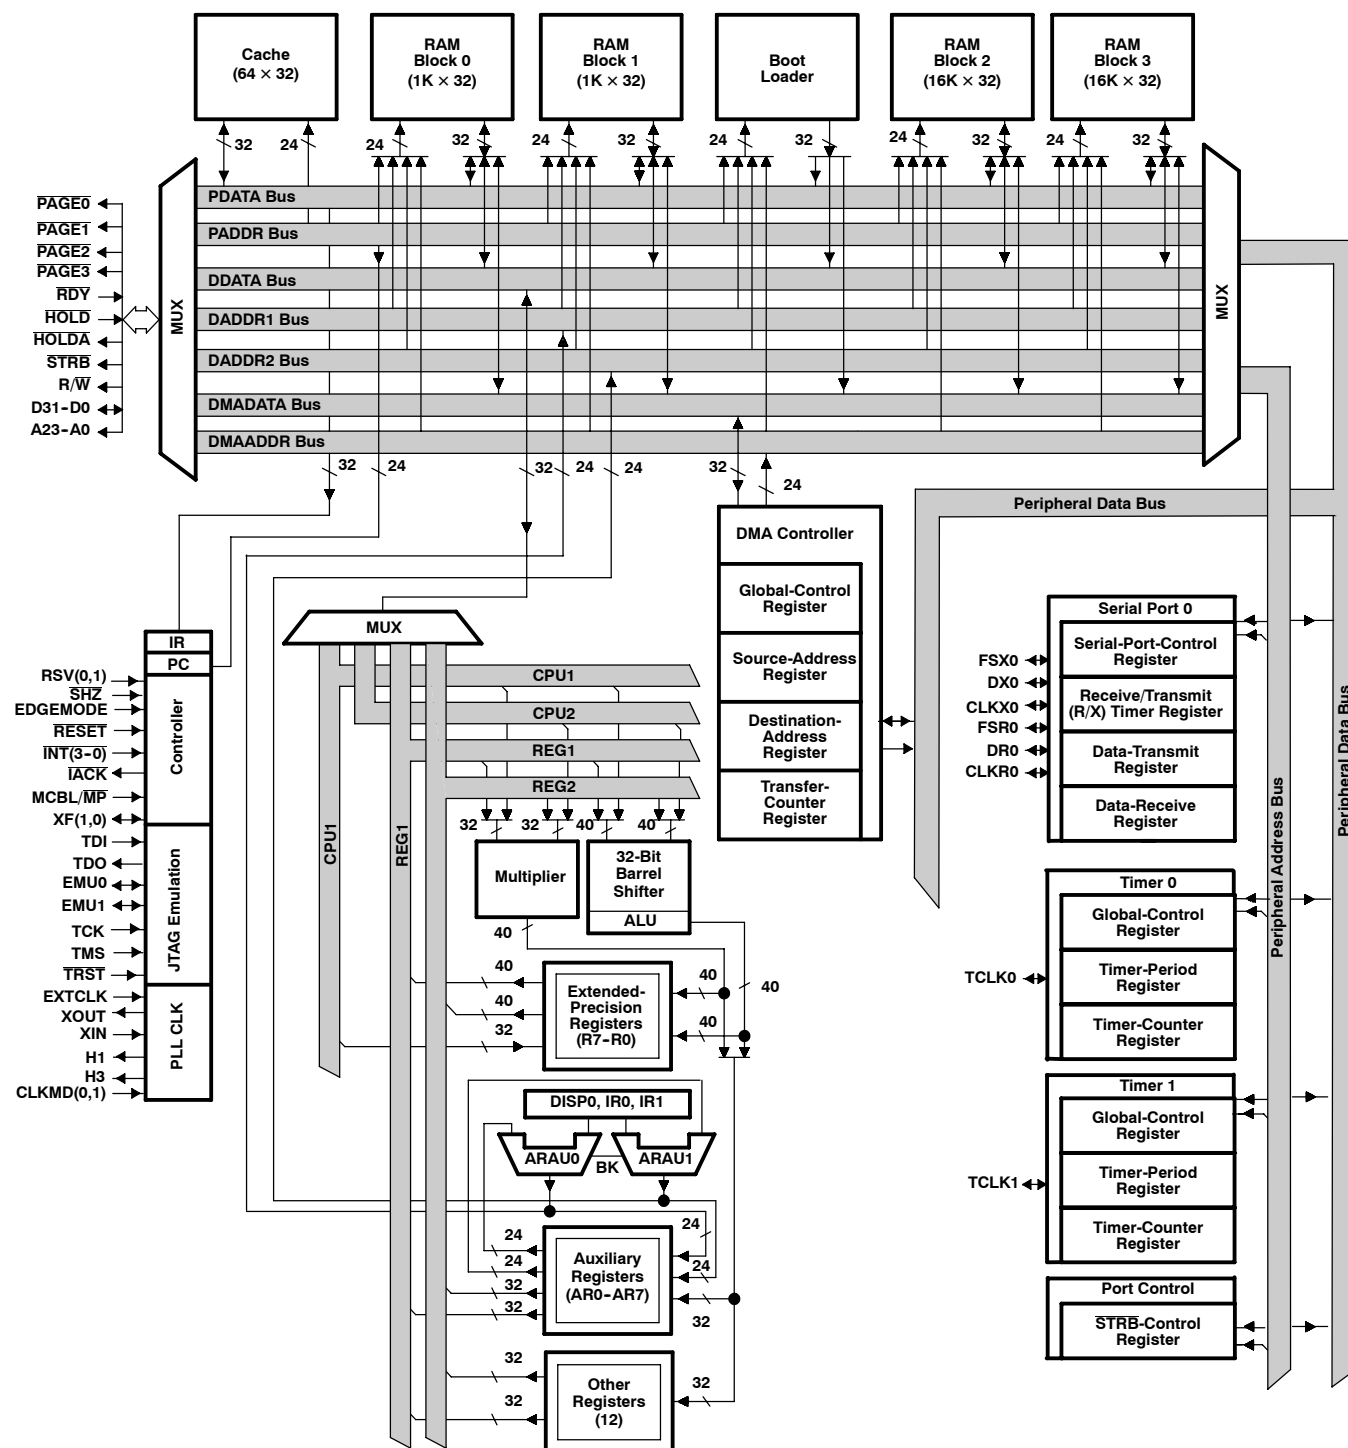



## memory map

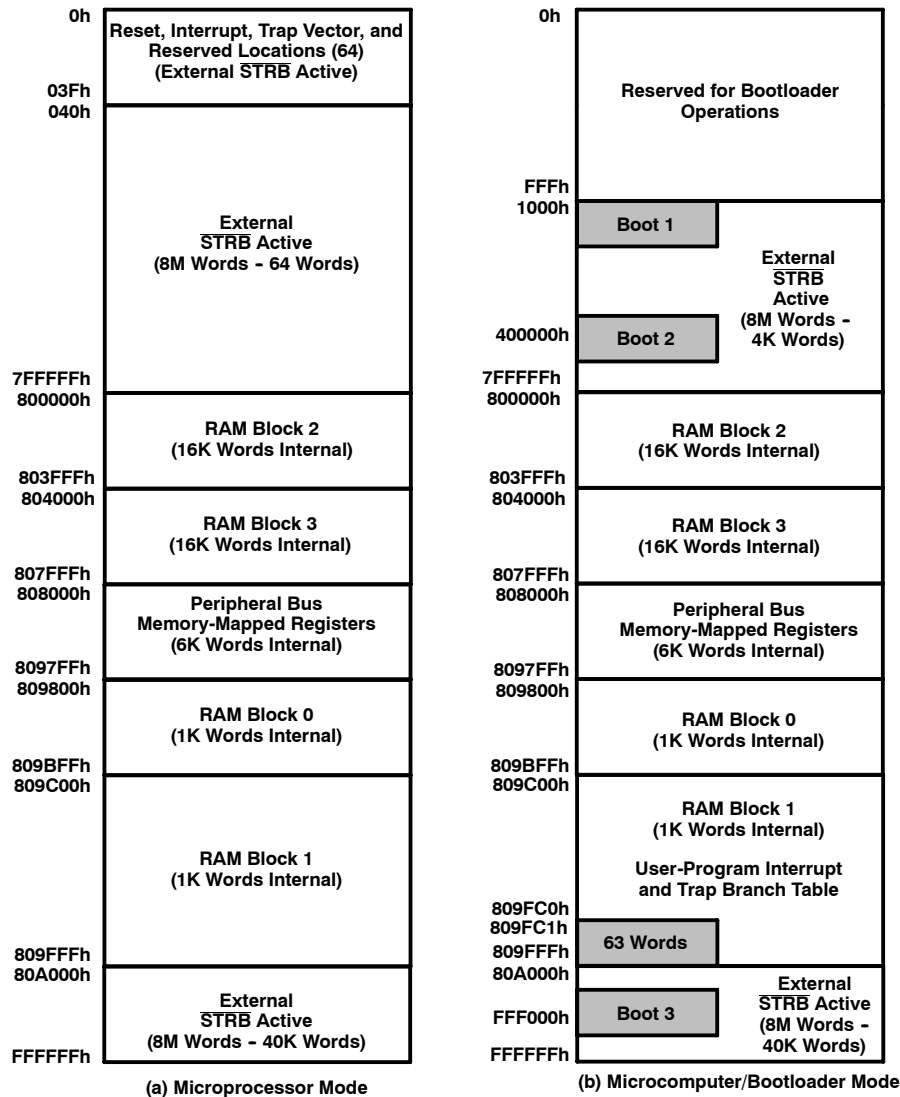

NOTE A:  $\overline{\text{STRB}}$  is active over all external memory ranges.  $\overline{\text{PAGE0}}$  to  $\overline{\text{PAGE3}}$  are configured as external bus strobes. These are simple decoded strobes that have no configuration registers and are active only during external bus activity over the following ranges:

| Name                      | Active range         |
|---------------------------|----------------------|
| $\overline{\text{PAGE0}}$ | 0000000h – 03FFFFFFh |
| $\overline{\text{PAGE1}}$ | 0400000h – 07FFFFFFh |
| $\overline{\text{PAGE2}}$ | 0800000h – 0BFFFFFFh |
| $\overline{\text{PAGE3}}$ | 0C00000h – 0FFFFFFh  |
| $\overline{\text{STRB}}$  | 0000000h – 0FFFFFFh  |

**Figure 1. TMS320VC33 Memory Maps**

# TMS320VC33 DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

## memory map (continued)

|     |          |
|-----|----------|
| 00h | Reset    |
| 01h | INT0     |
| 02h | INT1     |
| 03h | INT2     |
| 04h | INT3     |
| 05h | XINT0    |
| 06h | RINT0    |
| 07h | Reserved |
| 08h |          |
| 09h | TINT0    |
| 0Ah | TINT1    |
| 0Bh | DINT     |
| 0Ch | Reserved |
| 1Fh |          |
| 20h | TRAP 0   |
|     | •        |
|     | •        |
|     | •        |
| 3Bh | TRAP 27  |
| 3Ch | Reserved |
| 3Fh |          |

(a) Microprocessor Mode

|         |          |
|---------|----------|
| 809FC1h | INT0     |
| 809FC2h | INT1     |
| 809FC3h | INT2     |
| 809FC4h | INT3     |
| 809FC5h | XINT0    |
| 809FC6h | RINT0    |
| 809FC7h | Reserved |
| 809FC8h |          |
| 809FC9h | TINT0    |
| 809FCAh | TINT1    |
| 809FCBh | DINT     |
| 809FCCh | Reserved |
| 809FDFh |          |
| 809FE0h | TRAP 0   |
|         | •        |
|         | •        |
|         | •        |
| 809FFBh | TRAP 27  |
| 809FFCh | Reserved |
| 809FFFh |          |

(b) Microcomputer/Bootloader Mode

Figure 2. Reset, Interrupt, and Trap Vector/Branches Memory-Map Locations

**memory map (continued)**

|         |                                  |
|---------|----------------------------------|
| 808000h | DMA Global Control               |
| 808004h | DMA Source Address               |
| 808006h | DMA Destination Address          |
| 808008h | DMA Transfer Counter             |
| 808020h | Timer 0 Global Control           |
| 808024h | Timer 0 Counter                  |
| 808028h | Timer 0 Period Register          |
| 808030h | Timer 1 Global Control           |
| 808034h | Timer 1 Counter                  |
| 808038h | Timer 1 Period Register          |
| 808040h | Serial Global Control            |
| 808042h | FSX/DX/CLKX Serial Port Control  |
| 808043h | FSR/DR/CLKR Serial Port Control  |
| 808044h | Serial R/X Timer Control         |
| 808045h | Serial R/X Timer Counter         |
| 808046h | Serial R/X Timer Period Register |
| 808048h | Data-Transmit                    |
| 80804Ch | Data-Receive                     |
| 808064h | Primary-Bus Control              |

NOTE A: Shading denotes reserved address locations.

**Figure 3. Peripheral Bus Memory-Mapped Registers**

**clock generator**

The clock generator provides clocks to the VC33 device, and consists of an internal oscillator and a phase-locked loop circuit. The clock generator requires a reference clock input, which can be provided by using a crystal resonator with the internal oscillator, or from an external clock source. The PLL circuit generates the device clock by multiplying the reference clock frequency by a x5 scale factor, allowing use of a clock source with a lower frequency than that of the CPU. The PLL is an adaptive circuit that, once synchronized, locks onto and tracks an input clock signal.

# TMS320VC33

## DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

### PLL and clock oscillator control

The clock mode control pins are decoded into four operational modes as shown in Figure 4. These modes control clock divide ratios, oscillator, and PLL power (see Table 1).

When an external clock input or crystal is connected, the opposite unused input is simply grounded. An XOR gate then passes one of the two signal sources to the PLL stage. This allows the direct injection of a clock reference into EXTCLK, or 1–20 MHz crystals and ceramic resonators with the oscillator circuit. The two clock sources include:

- A crystal oscillator circuit, where a crystal or ceramic resonator is connected across the XOUT and XIN pins and EXTCLK is grounded.
- An external clock input, where an external clock source is directly connected to the EXTCLK pin, and XOUT is left unconnected and XIN is grounded.

When the PLL is initially started, it enters a transitional mode during which the PLL acquires lock with the input signal. Once the PLL is locked, it continues to track and maintain synchronization with the input signal. The PLL is a simple x5 reference multiplier with bypass and power control.

The clock divider, under CPU control, reduces the clock reference by 1 (MAXSPEED), 1/16 (LOPOWER), or clock stop (IDLE2). Wake-up from the IDLE2 state is accomplished by a  $\overline{\text{RESET}}$  or interrupt pin logic-low state.

A divide-by-two TMS320C31 equivalent mode of operation is also provided. In this case, the clock output reference is further divided by two with clock synchronization being determined by the timing of  $\overline{\text{RESET}}$  falling relative to the present H1/H3 state.

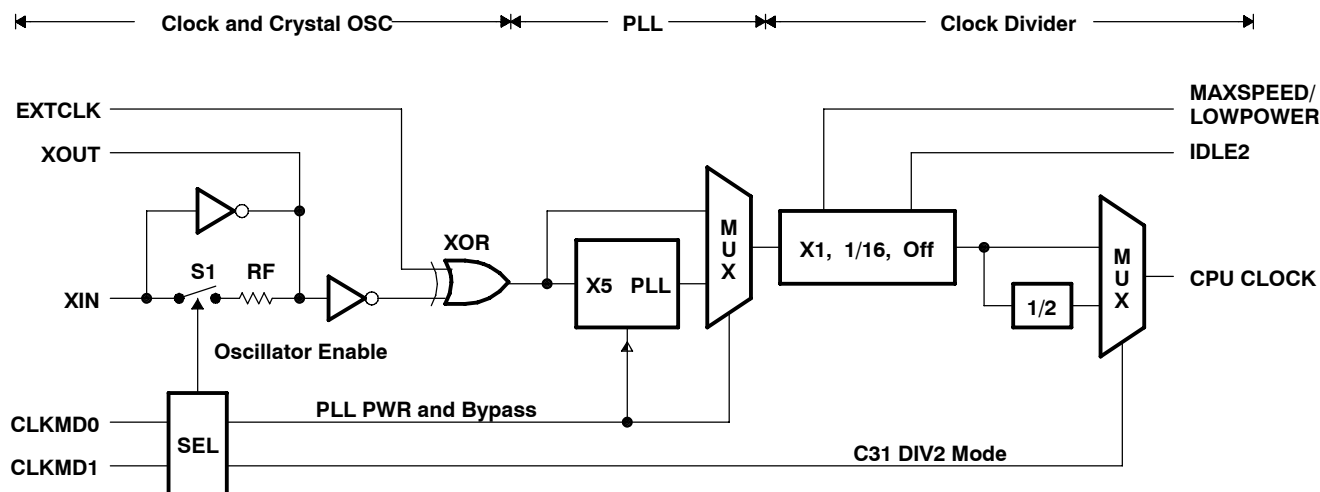


Figure 4. Clock Generation

Table 1. Clock Mode Select Pins

| CLKMD0 | CLKMD1 | FEEDBACK | PLLPWR | RATIO | NOTES                                              |
|--------|--------|----------|--------|-------|----------------------------------------------------|
| 0      | 0      | Off      | Off    | 1     | Fully static, very low power                       |
| 0      | 1      | On       | Off    | 1/2   | Oscillator enabled                                 |
| 1      | 0      | On       | Off    | 1     | Oscillator enabled                                 |
| 1      | 1      | On       | On     | 5     | 2 mA @ 60 MHz, 1.8 V PLL power. Oscillator enabled |

## PLL and clock oscillator control (continued)

Typical crystals in the 8–30 MHz range have a series resistance of 25  $\Omega$ , which increases below 8 MHz. To maintain proper filtering and phase relationships,  $R_d$  and  $Z_{out}$  of the oscillator circuit should be 10x–40x that of the crystal. A series compensation resistor ( $R_d$ ), shown in Figure 5, is recommended when using lower frequency crystals. The XOUT output, the square wave inverse of XIN, is then filtered by the XOUT output impedance, C1 load capacitor, and  $R_d$  (if present). The crystal and C2 input load capacitor then refilters this signal, resulting in a XIN signal that is 75–85% of the oscillator supply voltage.


**NOTE:** Some ceramic resonators are available in a low-cost, three-terminal package that includes C1 and C2 internally. Typically, ceramic resonators do not provide the frequency accuracy of crystals.

**NOTE:** Better PLL stability can be achieved using the optional power supply isolation circuit shown in Figure 5. A similar filter can be used to isolate the PLLV<sub>SS</sub>, as shown in Figure 6. PLLV<sub>DD</sub> can also be directly connected to CV<sub>DD</sub>.

**Table 2. Typical Crystal Circuit Loading**

| FREQUENCY (MHz) | $R_d$ ( $\Omega$ ) | C1 (pF) | C2 (pF) | CL <sup>†</sup> (pF) | RL <sup>†</sup> ( $\Omega$ ) |
|-----------------|--------------------|---------|---------|----------------------|------------------------------|
| 2               | 4.7k               | 18      | 18      | 12                   | 200                          |
| 5               | 2.2k               | 18      | 18      | 12                   | 60                           |
| 10              | 470                | 15      | 15      | 12                   | 30                           |
| 15              | 0                  | 15      | 12      | 12                   | 25                           |
| 20              | 0                  | 9       | 9       | 10                   | 25                           |

<sup>†</sup> CL and RL are typical internal series load capacitance and resistance of the crystal.

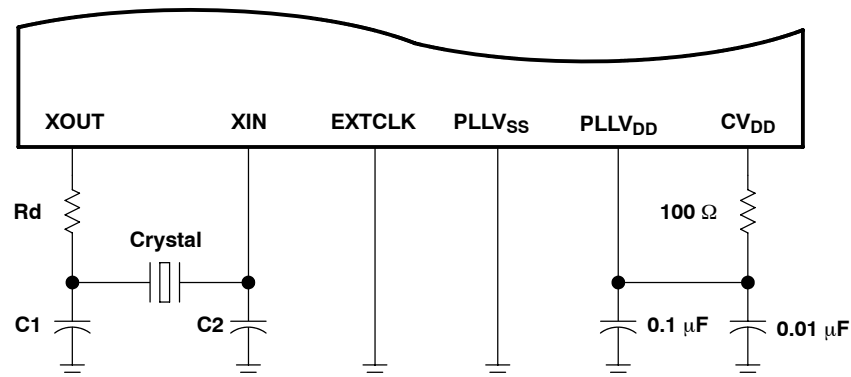

**Figure 5. Self-Oscillation Mode**

### PLL isolation

The internal PLL supplies can be directly connected to  $CV_{DD}$  and  $V_{SS}$  (0  $\Omega$  case), partially isolated as shown in Figure 5, or fully isolated as shown in Figure 6. The RC network prevents the PLL supplies from turning high frequency noise in the  $CV_{DD}$  and  $V_{SS}$  supplies into jitter.

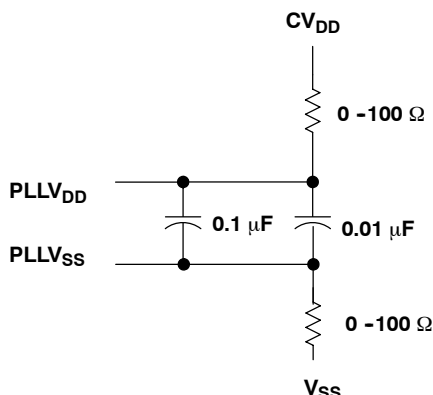


Figure 6. PLL Isolation Circuit Diagram

### clock and PLL considerations on initialization

On power up, the CPU clock divide mode can be in MAXSPEED, LOPOWER or IDLE2, or the PLL could be in an undefined mode.  $\overline{\text{RESET}}$  falling in the presence of a valid CPU clock is used to clear this state, after which the device will synchronously terminate any external activity.

The 5x Fclkin PLL of the TMS320VC33 contains an 8-bit PLL-LOCK counter which causes the PLL to output a frequency of Fclkin/2 during the initial ramp. This counter, however, does not increment while  $\overline{\text{RESET}}$  is low or in the absence of an input clock. A minimum of 256 input clocks are required before the first falling edge of reset for the PLL to output to clear this counter. The setup and behavior that is seen is as follows.

Power is applied to the DSP with  $\overline{\text{RESET}}$  low and the input clock high or low. A clock is applied ( $\overline{\text{RESET}}$  is still low) and the PLL appears to lock on to the input clock, producing the expected x5 output frequency.  $\overline{\text{RESET}}$  is driven high and the PLL output immediately drops to Fclkin/2 for 0-256 input cycles or 128 of the Fclkin/2 output cycles. The PLL/CPU clock then switches to x5 mode.

The switch over is synchronous and does not create a clock glitch, so the only effect is that the CPU runs slow for up to the first 128 cycles after reset goes high. Once the PLL has stabilized, the counter will remain cleared and subsequent resets will not exhibit this condition.

Systems that are not using the crystal oscillator may be required to supply a current of 250mA per DSP if full power is applied with no clock source. This extra current condition is a result of uninitialized internal logic within the DSP core and is corrected when the CPU sees a minimum of four internal clocks. The crystal oscillator is typically immune to this condition since the oscillator and core circuitry become semi-functional at  $CV_{DD} = 1$  V where the fault current is considerably lower. An alternate clock pulse can also be applied to either the EXTCLK or XIN clock input pins.

Though an internal ESD and CMOS latchup protection diode exists between  $CV_{DD}$  and  $DV_{DD}$ , it should not be considered a current-carrying device on power up. An external Schottky diode should be used to prevent  $CV_{DD}$  from exceeding  $DV_{DD}$  by more than 0.7 V. The effect of this diode during power up is that if  $CV_{DD}$  is powered up first,  $DV_{DD}$  follows by one diode drop even when the  $DV_{DD}$  supply is not active.

## EDGEMODE

When `EDGEMODE = 0`, a logic-low interrupt pin continually sets the corresponding interrupt flag. The CPU or DMA can clear this flag within two cycles of it being set. This is the maximum interrupt width that can be applied if only one interrupt is to be recognized. The CPU can manually clear IF bits within an interrupt service routine (ISR), effectively lengthening the maximum ISR width.

[illegible]

## reset operation

When both **RESET** and **SHZ** are applied, the device immediately enters the reset state with the pins held in high-impedance mode. **SHZ** should then be disabled at least 10 CPU cycles before **RESET** is set high. **SHZ** can be used during power-up sequencing to prevent undefined address, data, and control pins, avoiding system conflicts.

# TMS320VC33

## DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

### PAGE0 - PAGE3 select lines

To facilitate simpler and higher speed connection to external devices, the TMS320VC33 includes four predecoded select pins that have the same timings as  $\overline{\text{STRB}}$ . These pins are decoded from A22, A23, and  $\overline{\text{STRB}}$  and are active only during external accesses over the ranges shown in Table 3. All external bus accesses are controlled by a single bus control register.

Table 3. PAGE0 - PAGE3 Ranges

|       | START    | END        |
|-------|----------|------------|
| PAGE0 | 0x000000 | 0x3FFFFFF  |
| PAGE1 | 0x400000 | 0x7FFFFFF  |
| PAGE2 | 0x800000 | 0xBFFFFFF  |
| PAGE3 | 0xC00000 | 0xFFFFFFFF |

### using external logic with the $\overline{\text{READY}}$ pin

The key to designing external wait-state logic is the internal bus control register and associated internal logic that logically combines the external  $\overline{\text{READY}}$  pin with the much faster on-chip bus control logic. This essentially allows slow external logic to interact with the bus while easily meeting the  $\overline{\text{READY}}$  input timings. It is also relevant to mention that the combined ready signals are sampled on the rising edge of the internal H1 clock. Please refer to Figure 8 for the following examples.

#### example 1

A simple 0 or WTCNT wait-state decoder can be created by simply tying an address line back to the  $\overline{\text{READY}}$  pin and selecting the AND option. When the tied back address is low, the bus runs with 0 wait states. When the tied back address is high, the bus will be controlled by the internal wait-state counter.

By enabling the bank compare logic, proper operation is further ensured by inserting a null cycle before a read on the next bank is performed (writes are not pre-extended). This extra time can also be used by external logic to affect the feedback path.

#### example 2

An N-WTCNT minimum wait-state decoder can also be created by tying back an address line to  $\overline{\text{READY}}$  and logically ORing it with the internal bank compare and wait count signals. When the address pin is low, bus timing is determined by the internal WTCNT and BNKCMP settings. When the address line is high, the bus can run no faster than the WTCNT counter and is extended as long as  $\overline{\text{READY}}$  is held high.





example 2 (continued)

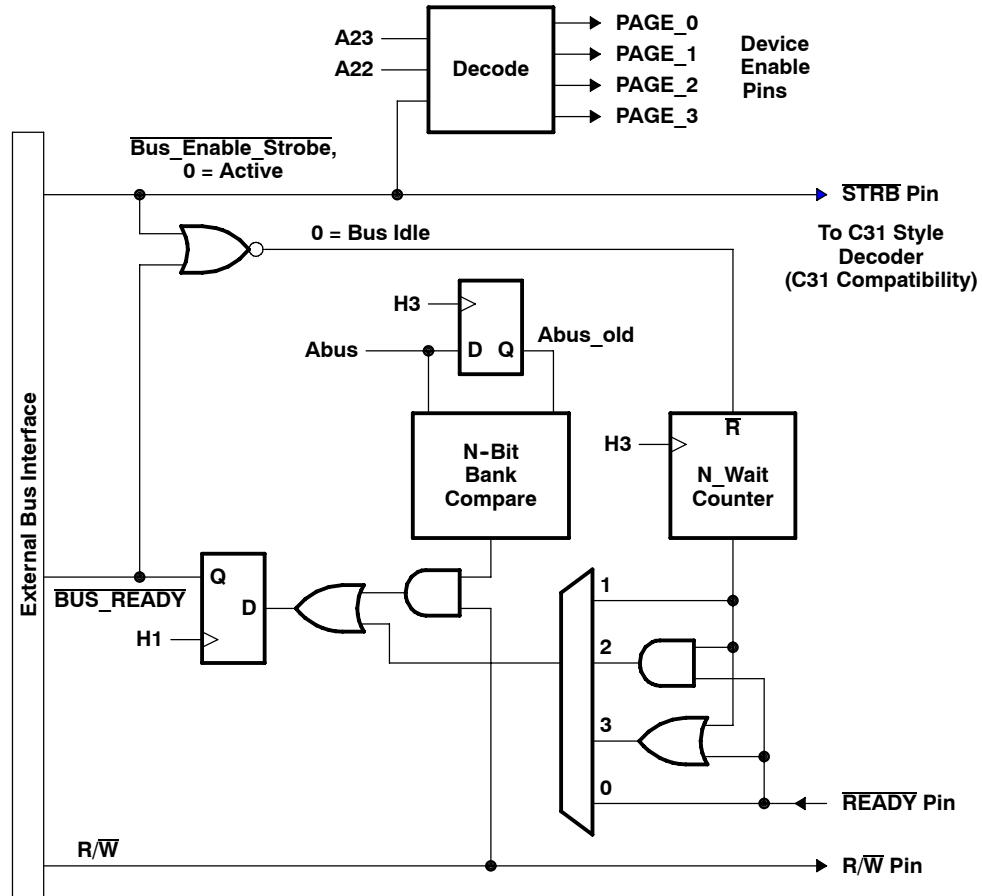


Figure 8. Internal Ready Logic, Simplified Diagram

### example 2 (continued)

**Table 4. MUX Select (Bus Control Register Bits 4 and 3)**


| BIT 4 | BIT 3 | RESULTS                                                                      |
|-------|-------|------------------------------------------------------------------------------|
| 0     | 0     | Ignore internal wait counter and use only external $\overline{\text{READY}}$ |
| 0     | 1     | Use only internal wait counter and ignore ready pin                          |
| 1     | 0     | Logically AND internal wait counter with ready pin                           |
| 1     | 1     | Logically OR internal wait counter with ready pin (reset default)            |

### posted writes

External writes are effectively "posted" to the bus, which then acts like an output latch until the write completes. Therefore, if the application code is executing internally, it can perform a very slow external write with no penalty since the bus acts like it has a one-level-deep write FIFO.

### data bus I/O buffer

The circuit shown in Figure 9 is incorporated into each data pin to lightly "hold" the last driven value on the data bus pins when the DSP or an external device is not actively driving the bus. Each bus keeper is built from a three-state driver with nominal 15 k $\Omega$  output resistance which is fed back to the input in a positive feedback configuration. The resistance isolated driver then pulls the output in one direction or the other keeping the last driven value. This circuit is enabled in all functional modes and is only disabled when  $\overline{\text{SHZ}}$  is pulled low.

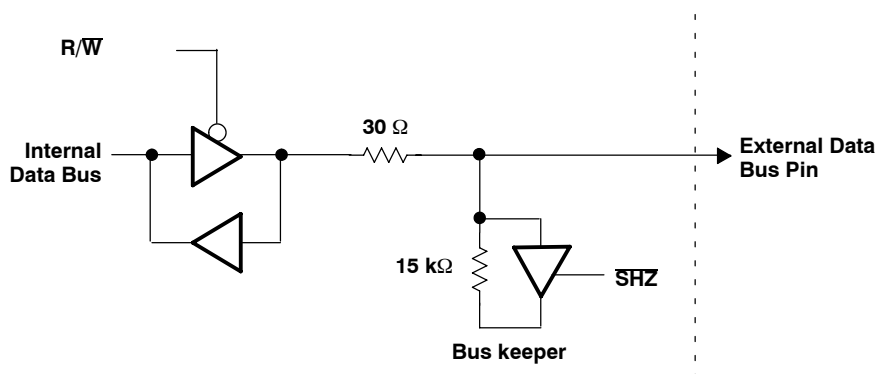

**Figure 9. Bus Keeper Circuit**

For an external device to change the state of these pins, it must be able to drive a small DC current until the driver threshold is crossed. At the crossover point, the driver changes state, agreeing with the external driver and assisting the change. The voltage threshold of the bus keeper is approximately at 50% of the  $\text{DV}_{\text{DD}}$  supply voltage. The typical output impedance of 30  $\Omega$  for all TMS320VC33 I/O pins is easily capable of meeting this requirement.

### bootloader operation

When  $\text{MCBL}/\overline{\text{MP}} = 1$ , an internal ROM is decoded into the address range of 0x000000–0x000FFF. Therefore, when reset occurs, execution begins within the internal ROM program and vector space. No external activity will be evident until one of the boot options is enabled. These options are enabled by pulling an external interrupt pin low, which the boot-load software then detects, causing a particular routine to be executed (see Table 5).

**bootloader operation (continued)**

**Table 5. INT0 - INT3 Sources**

| ACTIVE INTERRUPT | ADDRESS/SOURCE WHERE BOOT DATA IS READ FROM | DATA FORMAT                             |
|------------------|---------------------------------------------|-----------------------------------------|
| INT0             | 0x001000                                    | 8, 16, or 32-bit width                  |
| INT1             | 0x400000                                    | 8, 16, or 32-bit width                  |
| INT2             | 0xFFFF00                                    | 8, 16, or 32-bit width                  |
| INT3             | Serial Port                                 | 32-bit, external clock, and frame synch |


When  $MCBL/\overline{MP} = 1$ , the reset and interrupt vectors are hard-coded within the internal ROM. Since this is a read-only device, these vectors cannot be modified. To enable user-defined interrupt routines, the internal vectors contain fixed values that point to an internal section of SRAM beginning at 0x809FC1. Code execution begins at these locations so it is important to place branch instructions (to the interrupt routine) at these locations and not vectors.

The bootloader program requires a small stack space for calls and returns. Two SRAM locations at 0x809800 and 0x809801 are used for this stack. Data should not be boot loaded into these locations as this will corrupt the bootloader program run-time stack. After the boot-load operation is complete, a program can reclaim these locations. The simplest solution is to begin a program's stack or uninitialized data section at 0x809800.

For additional detail on bootloader operation including the bootloader source code, see the *TMS320C3x User's Guide* (literature number SPRU031).

A bit I/O line or external logic can be used to safely disable the MCBL mode after bootloading is complete. However, to ensure proper operation, the CPU should not be currently executing code or using external data as the change takes place. In the following example, the XF0 pin is 3-state on reset, which allows the pullup resistor to place the DSP in MCBL mode. The following code, placed at the beginning of an application then causes the XF0 pin to become an active-logic-low output, changing the DSP mode to MP. The cache-enable and RPTS instructions are used since they cause the LDI instruction to be executed multiple times even though it has been fetched only once (before the mode change). In other words, the RPTS instruction acts as a one-level-deep program cache for externally executed code. If the application code is to be executed from internal RAM, no special provisions are needed.

```
LDI    8000h,ST    ; Enable the cache
RPTS   4           ; RPTS fetchs the following opcode 1 time
LDI    2h, IOF     ; Drive MCBL/MP=0 for several cycles allowing
                   ; the pipeline to clear
```

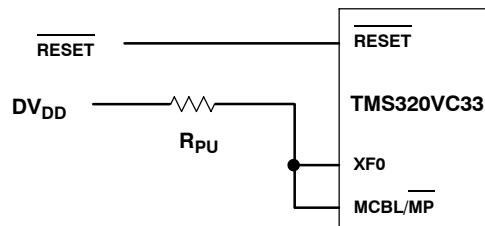

**Figure 10. Changing Bootload Select Pin**

# TMS320VC33 DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

## JTAG emulation

Though the TMS320VC33 contains a JTAG debug port which allows multiple JTAG enabled chips to be daisy-chained, boundary scan of the pins is not supported. If the pin scan path is selected, it will be routed through a null register with a length of one. For additional information concerning the emulation interface, see *JTAG/MPSD Emulation Technical Reference* (literature number SPDU079).

## designing your target system's emulator connector (14-pin header)

JTAG target devices support emulation through a dedicated emulation port. This port is a superset of the IEEE 1149.1 standard and is accessed by the emulator. To communicate with the emulator, **your target system must have a 14-pin header** (two rows of seven pins) with the connections that are shown in Figure 11. Table 6 describes the emulation signals.

|                       |    |    |                           |
|-----------------------|----|----|---------------------------|
| TMS                   | 1  | 2  | TRST                      |
| TDI                   | 3  | 4  | GND                       |
| PD (V <sub>CC</sub> ) | 5  | 6  | no pin (key) <sup>†</sup> |
| TDO                   | 7  | 8  | GND                       |
| TCK_RET               | 9  | 10 | GND                       |
| TCK                   | 11 | 12 | GND                       |
| EMU0                  | 13 | 14 | EMU1                      |

**Header Dimensions:**  
 Pin-to-pin spacing, 0.100 in. (X,Y)  
 Pin width, 0.025-in. square post  
 Pin length, 0.235-in. nominal

<sup>†</sup> While the corresponding female position on the cable connector is plugged to prevent improper connection, the cable lead for pin 6 is present in the cable and is grounded, as shown in the schematics and wiring diagrams in this document.

**Figure 11. 14-Pin Header Signals and Header Dimensions**

**Table 6. 14-Pin Header Signal Descriptions**

| SIGNAL               | DESCRIPTION                                                                                                                                                    | EMULATOR <sup>†</sup><br>STATE | TARGET <sup>†</sup><br>STATE |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|------------------------------|
| TMS <sup>‡</sup>     | Test mode select                                                                                                                                               | O                              | I                            |
| TDI                  | Test data input                                                                                                                                                | O                              | I                            |
| TDO                  | Test data output                                                                                                                                               | I                              | O                            |
| TCK                  | Test clock. TCK is a 10.368-MHz clock source from the emulation cable pod. This signal can be used to drive the system test clock                              | O                              | I                            |
| TRST <sup>‡</sup>    | Test reset                                                                                                                                                     | O                              | I                            |
| EMU0 <sup>§¶</sup>   | Emulation pin 0                                                                                                                                                | I                              | I/O                          |
| EMU1 <sup>§¶</sup>   | Emulation pin 1                                                                                                                                                | I                              | I/O                          |
| PD(V <sub>CC</sub> ) | Presence detect. Indicates that the emulation cable is connected and that the target is powered up. PD should be tied to V <sub>CC</sub> in the target system. | I                              | O                            |
| TCK_RET              | Test clock return. Test clock input to the emulator. May be a buffered or unbuffered version of TCK.                                                           | I                              | O                            |
| GND                  | Ground                                                                                                                                                         |                                |                              |

<sup>†</sup> I = input; O = output

<sup>‡</sup> Use 1–50K pulldown for TRST. Do not use pullup resistors on TRST: it has an internal pulldown device. In a low-noise environment, TRST can be left floating. In a high-noise environment, an additional pulldown resistor may be needed. (The size of this resistor should be based on electrical current considerations.)

<sup>§</sup> Use 1–50K pullups for TMS, EMU0 and EMU1.

<sup>¶</sup> EMU0 and EMU1 are I/O drivers configured as open-drain (open-collector) drivers. They are used as bidirectional signals for emulation global start and stop.



## designing your target system's emulator connector (14-pin header) (continued)

Although you can use other headers, recommended parts include:


### straight header, unshrouded

DuPont Connector Systems  
part numbers: 65610-114  
65611-114  
67996-114  
67997-114

## JTAG emulator cable pod logic

Figure 12 shows a portion of the emulator cable pod. The functional features of the pod are as follows:

- Signals TDO and TCK\_RET can be parallel-terminated inside the pod if required by the application. By default, these signals are not terminated.
- Signal TCK is driven with a 74LVT240 device. Because of the high-current drive ( $32\text{ mA } I_{OL}/I_{OH}$ ), this signal can be parallel-terminated. If TCK is tied to TCK\_RET, the parallel terminator in the pod can be used.
- Signals TMS and TDI can be generated from the falling edge of TCK\_RET, according to the IEEE 1149.1 bus slave device timing rules.
- Signals TMS and TDI are series-terminated to reduce signal reflections.
- A 10.368-MHz test clock source is provided. You may also provide your own test clock for greater flexibility.

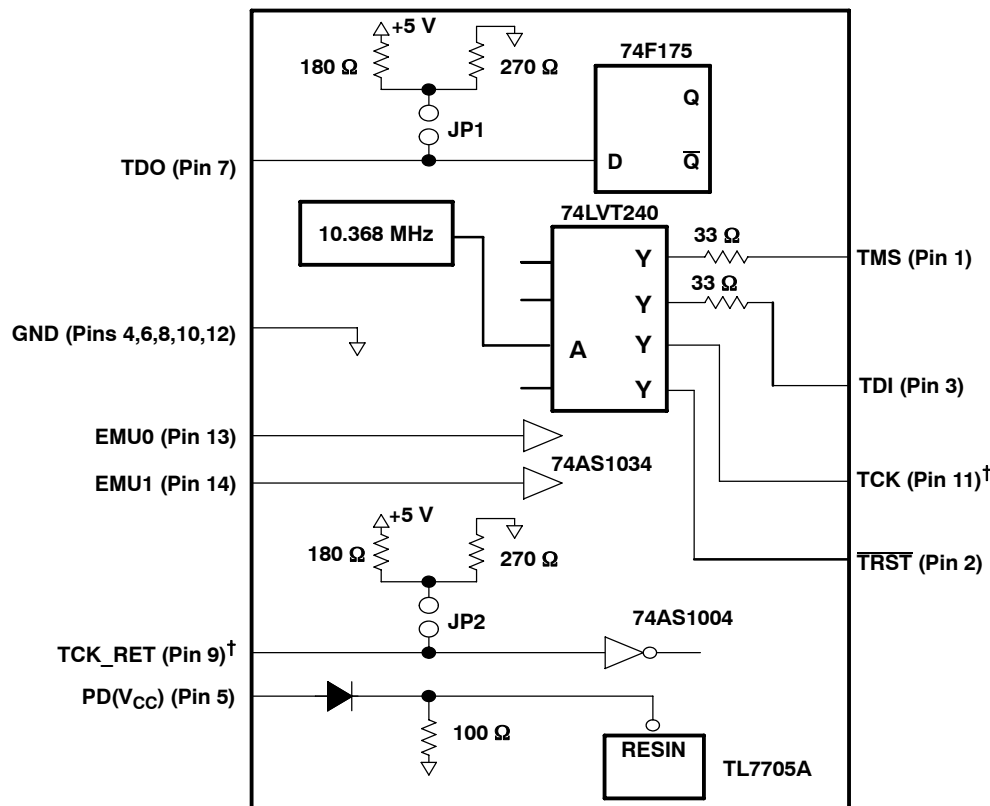

† The emulator pod uses TCK\_RET as its clock source for internal synchronization. TCK is provided as an optional target system test clock source.

**Figure 12. JTAG Emulator Cable Pod Interface**

# TMS320VC33 DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

## symbolization and speed ratings

The device revision can be determined by the lot trace code marked on the top of the package. The location for the lot trace codes for the PGE package is shown in Figure 13.

TMS320VC33 devices are rated in peak MFLOPS, shown as a suffix to the orderable part number (see Table 8). Figure 13 shows the device symbolization on the PGE package. A general "TMS320VC33" symbol defaults to the lowest speed rating for that device (120 MFLOPS). 150-MFLOPS devices are denoted with a "150" mark on the upper right-hand corner of the package. The VC33 CPU instruction rate is MFLOPS/2.

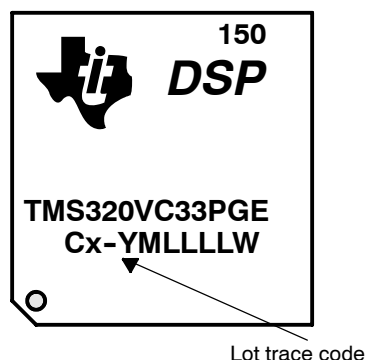


Figure 13. PGE Package (Top View)

Table 7. Example, Typical Lot Trace Code for TMS320VC33 DSP (PGE)

| Lot Trace Code                 | Silicon Revision | Comments   |
|--------------------------------|------------------|------------|
| Blank<br>(No letter in prefix) | 1.0              | TMX320VC33 |
| A<br>(Letter in prefix is A)   | 1.1              | TMS320VC33 |
| B<br>(Letter in prefix is B)   | 1.2              | TMS320VC33 |
| C<br>(Letter in prefix is C)   | 1.3              | TMS320VC33 |

Table 8. Device Orderable Part Numbers

| DEVICE            | SPEED (MFLOPS) | TEMPERATURE RATING |
|-------------------|----------------|--------------------|
| TMS320VC33PGE120  | 120            | 0°C to 90°C        |
| TMS320VC33PGEA120 | 120            | - 40°C to 100°C    |
| TMS320VC33PGE150  | 150            | 0°C to 90°C        |

---

## device and development support tool nomenclature

To designate the stages in the product development cycle, TI assigns prefixes to the part numbers of all TMS320™ DSP family devices and support tools. Each TMS320™ DSP member has one of three prefixes: TMX, TMP, or TMS. Texas Instruments recommends two of three possible prefix designators for its support tools: TMDX and TMDS. These prefixes represent evolutionary stages of product development from engineering prototypes (TMX/TMDX) through fully qualified production devices/tools (TMS/TMDS). This development flow is defined below.

Device development evolutionary flow:

|            |                                                                                                                                      |
|------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <b>TMX</b> | Experimental device that is not necessarily representative of the final device's electrical specifications                           |
| <b>TMP</b> | Final silicon die that conforms to the device's electrical specifications but has not completed quality and reliability verification |
| <b>TMS</b> | Fully-qualified production device                                                                                                    |

Support tool development evolutionary flow:

|             |                                                                                                          |
|-------------|----------------------------------------------------------------------------------------------------------|
| <b>TMDX</b> | Development support product that has not yet completed Texas Instruments internal qualification testing. |
| <b>TMDS</b> | Fully qualified development support product                                                              |

TMX and TMP devices and TMDX development support tools are shipped against the following disclaimer:

"Developmental product is intended for internal evaluation purposes."

TMS devices and TMDS development support tools have been characterized fully, and the quality and reliability of the device has been demonstrated fully. TI's standard warranty applies.

Predictions show that prototype devices (TMX or TMP) have a greater failure rate than the standard production devices. Texas Instruments recommends that these devices not be used in any production system because their expected end-use failure rate still is undefined. Only qualified production devices are to be used.


TI device nomenclature also includes a suffix with the device family name. This suffix indicates the package type (for example, PZ, PGE, PBK, or GGU) and temperature range (for example, L). Figure 14 provides a legend for reading the complete device name for any TMS320™ DSP family member.

# TMS320VC33

## DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

### device and development support tool nomenclature (continued)

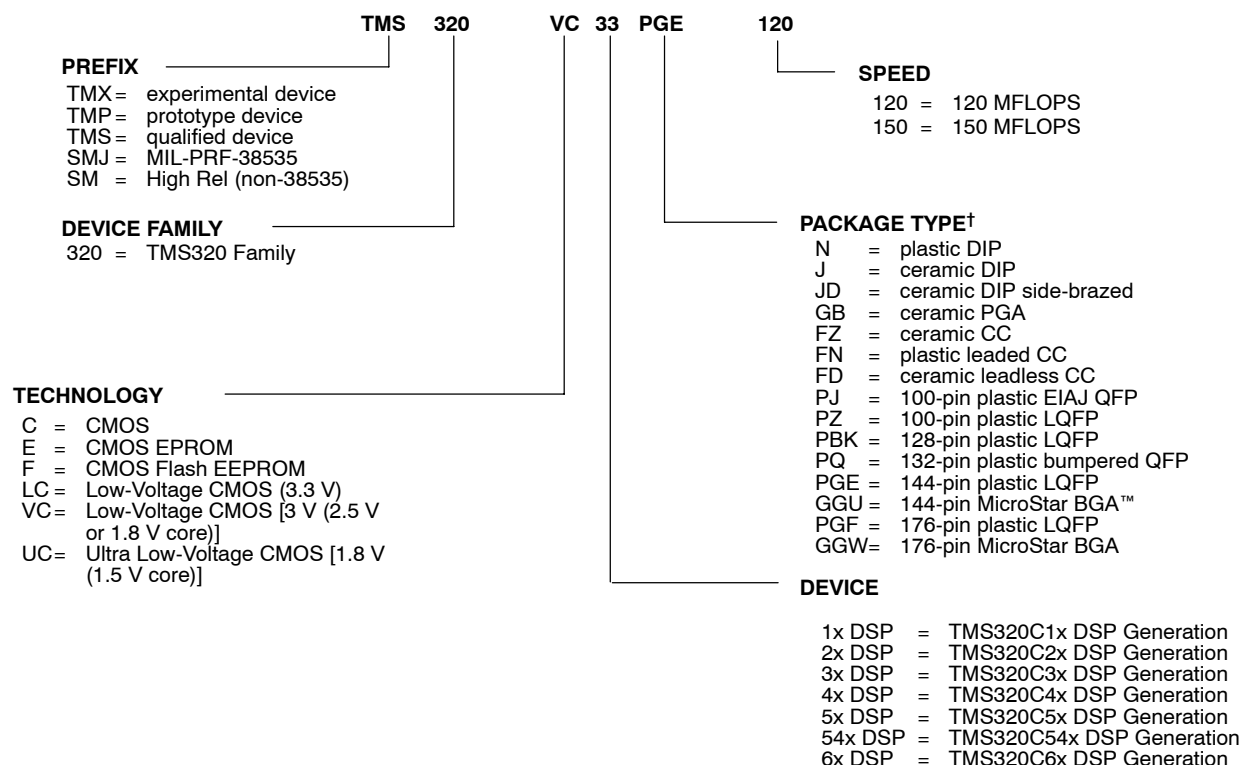

† DIP = Dual-In-Line Package  
 PGA = Pin Grid Array  
 CC = Chip Carrier  
 QFP = Quad Flat Package  
 LQFP = Low-Profile Quad Flat Package  
 BGA = Ball Grid Array

**Figure 14. TMS320™ DSP Device Nomenclature**

MicroStar BGA is a trademark of Texas Instruments.





**absolute maximum ratings over specified temperature range (unless otherwise noted)<sup>†</sup>**

|                                                            |                                |
|------------------------------------------------------------|--------------------------------|
| Supply voltage range, $DV_{DD}^{\ddagger}$                 | -0.3 V to 4 V                  |
| Supply voltage range, $CV_{DD}^{\ddagger}$                 | -0.3 V to 2.4 V                |
| Input voltage range, $V_I^{\S}$                            | -1 V to 4.6 V                  |
| Output voltage range, $V_O$                                | -0.3 V to 4.6 V                |
| Continuous power dissipation (worst case) <sup>¶</sup>     | 500 mW<br>(for TMS320VC33-150) |
| Operating case temperature range, $T_C$ (PGE - commercial) | 0°C to 90°C                    |
| $T_C$ (PGEA - industrial)                                  | -40°C to 100°C                 |
| Storage temperature range, $T_{stg}$                       | -55°C to 150°C                 |

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

<sup>‡</sup> All voltage values are with respect to  $V_{SS}$ .

<sup>§</sup> Absolute DC input level should not exceed the  $DV_{DD}$  or  $V_{SS}$  supply rails by more than 0.3 V. An instantaneous low current pulse of < 2 ns, < 10 mA, and < 1 V amplitude is permissible.

<sup>¶</sup> Actual operating power is much lower. This value was obtained under specially produced worst-case test conditions for the TMS320VC33, which are not sustained during normal device operation. These conditions consist of continuous parallel writes of a checkerboard pattern to the external data and address buses at the maximum possible rate with a capacitive load of 30 pF. See normal ( $I_{CC}$ ) current specification in the electrical characteristics table and also read *TMS320C3x General-Purpose Applications User's Guide* (literature number SPRU194).

**recommended operating conditions<sup>‡#||</sup>**

|                                                        | MIN                                     | NOM | MAX                  | UNIT |
|--------------------------------------------------------|-----------------------------------------|-----|----------------------|------|
| $CV_{DD}$ Supply voltage for the core CPU <sup>☆</sup> | 1.71                                    | 1.8 | 1.89                 | V    |
| $DV_{DD}$ Supply voltage for the I/O pins <sup>□</sup> | 3                                       | 3.3 | 3.6                  | V    |
| $V_{SS}$ Supply ground                                 |                                         | 0   |                      | V    |
| $V_{IH}$ High-level input voltage                      | $0.7 * DV_{DD}$                         |     | $DV_{DD} + 0.3^{\S}$ | V    |
| $V_{IL}$ Low-level input voltage                       | $-0.3^{\S}$                             |     | $0.3 * DV_{DD}$      | V    |
| $I_{OH}$ High-level output current                     |                                         |     | 4                    | mA   |
| $I_{OL}$ Low-level output current                      |                                         |     | 4                    | mA   |
| $T_C$                                                  | Operating case temperature (commercial) |     | 90                   | °C   |
|                                                        | Operating case temperature (industrial) |     | 100                  |      |
| $C_L$ Capacitive load per output pin                   |                                         |     | 30                   | pF   |

<sup>‡</sup> All voltage values are with respect to  $V_{SS}$ .

<sup>§</sup> Absolute DC input level should not exceed the  $DV_{DD}$  or  $V_{SS}$  supply rails by more than 0.3 V. An instantaneous low current pulse of < 2 ns, < 10 mA, and < 1 V amplitude is permissible.

<sup>#</sup> All inputs and I/O pins are configured as inputs.

<sup>||</sup> All input and I/O pins use a Schmitt hysteresis inputs except  $\overline{SHZ}$  and D0-D31. Hysteresis is approximately 10% of  $DV_{DD}$  and is centered at  $0.5 * DV_{DD}$ .

<sup>☆</sup>  $CV_{DD}$  should not exceed  $DV_{DD}$  by more than 0.7 V. (Use a Schottky clamp diode between these supplies.)

<sup>□</sup>  $DV_{DD}$  should not exceed  $CV_{DD}$  by more than 2.5 V.

# TMS320VC33

## DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

### electrical characteristics over recommended ranges of supply voltage (unless otherwise noted)<sup>†</sup>

| PARAMETER        |                                                               | TEST CONDITIONS <sup>‡</sup>                         |                         |          | MIN   | TYP <sup>§</sup> | MAX  | UNIT |
|------------------|---------------------------------------------------------------|------------------------------------------------------|-------------------------|----------|-------|------------------|------|------|
| V <sub>OH</sub>  | High-level output voltage                                     | DV <sub>DD</sub> = MIN, I <sub>OH</sub> = MAX        |                         |          | 2.4   |                  |      | V    |
| V <sub>OL</sub>  | Low-level output voltage                                      | DV <sub>DD</sub> = MIN, I <sub>OL</sub> = MAX        |                         |          |       |                  | 0.4  | V    |
| I <sub>Z</sub>   | High-impedance current                                        | DV <sub>DD</sub> = MAX                               |                         |          | - 5   |                  | + 5  | μA   |
| I <sub>I</sub>   | Input current                                                 | V <sub>I</sub> = V <sub>SS</sub> to DV <sub>DD</sub> |                         |          | - 5   |                  | + 5  | μA   |
| I <sub>IPU</sub> | Input current (with internal pullup)                          | Inputs with internal pullups <sup>¶</sup>            |                         |          | - 600 |                  | 10   | μA   |
| I <sub>IPD</sub> | Input current (with internal pulldown)                        | Inputs with internal pulldowns <sup>¶</sup>          |                         |          | 600   |                  | - 10 | μA   |
| I <sub>BKU</sub> | Input current (with bus keeper) pullup <sup>#</sup>           | Bus keeper opposes until conditions match            |                         |          | - 600 |                  | 10   | μA   |
| I <sub>BKD</sub> | Input current (with bus keeper) pulldown <sup>#</sup>         |                                                      |                         |          | 600   |                  | - 10 | μA   |
| I <sub>DDD</sub> | Supply current, pins <sup>  </sup> ★                          | T <sub>C</sub> = 25°C,<br>DV <sub>DD</sub> = MAX     | f <sub>x</sub> = 60 MHz | VC33-120 |       | 20               | 120  | mA   |
|                  |                                                               |                                                      | f <sub>x</sub> = 75 MHz | VC33-150 |       | 25               | 150  |      |
| I <sub>DDC</sub> | Supply current, core CPU <sup>  </sup> ★                      | T <sub>C</sub> = 25°C,<br>CV <sub>DD</sub> = MAX     | f <sub>x</sub> = 60 MHz | VC33-120 |       | 50               | 80   | mA   |
|                  |                                                               |                                                      | f <sub>x</sub> = 75 MHz | VC33-150 |       | 60               | 100  |      |
| I <sub>DD</sub>  | IDLE2, Supply current, I <sub>DDD</sub> plus I <sub>DDC</sub> | PLL enabled, oscillator enabled                      |                         |          |       | 2                |      | mA   |
|                  |                                                               | PLL disabled, oscillator enabled                     |                         |          |       | 500              |      |      |
|                  |                                                               | PLL disabled, oscillator disabled, FCLK = 0          |                         |          |       | 100              |      |      |
| C <sub>i</sub>   | Input capacitance                                             | All inputs except XIN                                |                         |          |       |                  | 10   | pF   |
|                  |                                                               | XIN                                                  |                         |          |       |                  | 10   |      |
| C <sub>o</sub>   | Output capacitance                                            |                                                      |                         |          |       |                  | 10   | pF   |

<sup>†</sup> All voltage values are with respect to V<sub>SS</sub>.

<sup>‡</sup> For test conditions shown as MIN, MAX, or NOM, use the appropriate value specified in the recommended operating conditions table.

<sup>§</sup> For VC33, all typical values are at DV<sub>DD</sub> = 3.3, CV<sub>DD</sub> = 1.8 V, T<sub>C</sub> (case temperature) = 25°C.


<sup>¶</sup> Pins with internal pullup devices: TDI, TCK, and TMS. Pin with internal pulldown device:  $\overline{\text{TRST}}$ .

<sup>#</sup> Pins D0-D31 include internal bus keepers that maintain valid logic levels when the bus is not driven (see Figure 9).

<sup>||</sup> Actual operating current is less than this maximum value. This value was obtained under specially produced worst-case test conditions, which are not sustained during normal device operation. These conditions consist of continuous parallel writes of a checkerboard pattern at the maximum rate possible. See *TMS320C3x General-Purpose Applications User's Guide* (literature number SPRU194).

★f<sub>x</sub> is the PLL output clock frequency.

### PARAMETER MEASUREMENT INFORMATION

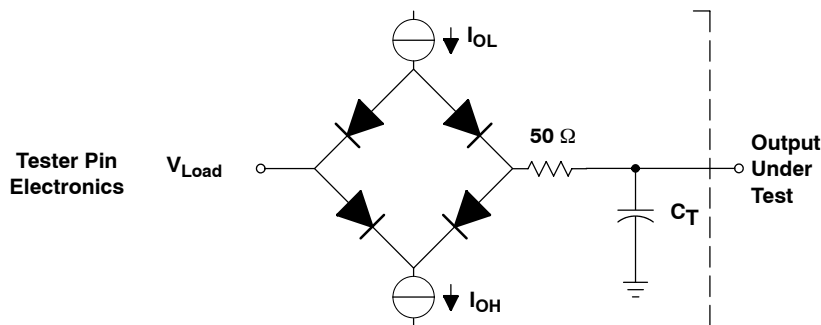

Where: I<sub>OL</sub> = 4 mA (all outputs) for DC levels test.  
I<sub>O</sub> and I<sub>OH</sub> are adjusted during AC timing analysis to achieve an AC termination of 50 Ω  
V<sub>LOAD</sub> = DV<sub>DD</sub>/2  
C<sub>T</sub> = 40-pF typical load-circuit capacitance

Figure 15. Test Load Circuit

## PARAMETER MEASUREMENT INFORMATION

### timing parameter symbology

Timing parameter symbols used herein were created in accordance with JEDEC Standard 100. In order to shorten the symbols, some of the pin names and other related terminology have been abbreviated as follows, unless otherwise noted:

#### Lowercase subscripts and their meanings

|     |                                        |
|-----|----------------------------------------|
| a   | access time                            |
| c   | cycle time (period)                    |
| d   | delay time                             |
| dis | disable time                           |
| en  | enable time                            |
| f   | fall time                              |
| h   | hold time                              |
| r   | rise time                              |
| su  | setup time                             |
| t   | transition time                        |
| v   | valid time                             |
| w   | pulse duration (width)                 |
| x   | unknown, changing, or don't care level |

#### Letters and symbols and their meanings

|   |                |
|---|----------------|
| H | High           |
| L | Low            |
| V | Valid          |
| Z | High Impedance |

#### Additional symbols and their meaning

|         |                                                                                                     |       |                        |
|---------|-----------------------------------------------------------------------------------------------------|-------|------------------------|
| A       | Address lines (A23-A0)                                                                              | H     | H1 and H3              |
| ASYNCH  | Asynchronous reset signals (XF0, XF1, CLKX0, DX0, FSX0, CLKR0, DR0, FSR0, TCLK0, and TCLK1)         | HOLD  | <del>HOLD</del>        |
| CLKX    | CLKX0                                                                                               | HOLDA | <del>HOLDA</del>       |
| CLKR    | CLKR0                                                                                               | IACK  | <del>IACK</del>        |
| CONTROL | Control signals                                                                                     | INT   | <del>INT3-INT0</del>   |
| D       | Data lines (D31-D0)                                                                                 | PAGE  | <del>PAGE0-PAGE3</del> |
| DR      | DR                                                                                                  | RDY   | <del>RDY</del>         |
| DX      | DX                                                                                                  | RW    | <del>R/W</del>         |
| EXTCLK  | EXTCLK                                                                                              | RW    | <del>R/W</del>         |
| FS      | FSX/R                                                                                               | RESET | <del>RESET</del>       |
| FSX     | FSX0                                                                                                | S     | <del>STRB</del>        |
| FSR     | FSR0                                                                                                | SCK   | CLKX/R                 |
| GPI     | General-purpose input                                                                               | SHZ   | <del>SHZ</del>         |
| GPIO    | General-purpose input/output; peripheral pin (CLKX0, CLKR0, DX0, DR0, FSX0, FSR0, TCLK0, and TCLK1) | TCLK  | TCLK0, TCLK1, or TCLKx |
| GPO     | General-purpose output                                                                              | XF    | XF0, XF1, or XFx       |
| H1      | H1                                                                                                  | XF0   | XF0                    |
| H3      | H3                                                                                                  | XF1   | XF1                    |
|         |                                                                                                     | XIN   | XIN                    |

# TMS320VC33

## DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

### phase-locked loop (PLL) circuit timing

switching characteristics over recommended operating conditions for phase-locked loop using EXTCLK or on-chip crystal oscillator<sup>†</sup>

| PARAMETER           |                                                 | MIN | MAX  | UNIT   |
|---------------------|-------------------------------------------------|-----|------|--------|
| F <sub>pllin</sub>  | Frequency range, PLL input                      | 5   | 15   | MHz    |
| F <sub>plfout</sub> | Frequency range, PLL output                     | 25  | 75   | MHz    |
| I <sub>pll</sub>    | PLL current, CV <sub>DD</sub> supply            |     | 2    | mA     |
| P <sub>pll</sub>    | PLL power, CV <sub>DD</sub> supply              |     | 5    | mW     |
| PLL <sub>dc</sub>   | PLL output duty cycle at H1                     | 45  | 55   | %      |
| PLLJ                | PLL output jitter, F <sub>plfout</sub> = 25 MHz |     | 400  | ps     |
| PLL <sub>LOCK</sub> | PLL lock time in input cycles                   |     | 1000 | cycles |

<sup>†</sup> Duty cycle is defined as  $100 \cdot t_1 / (t_1 + t_2) \%$

To ensure clean internal clock references, the minimal low and high pulse durations must be maintained. At high frequencies, this may require a fast rise and fall time as well as a tightly controlled duty cycle. At lower frequencies, these requirements are less restrictive when in x1 and x0.5 modes. The PLL, however, must have an input duty cycle of between 40% and 60% for proper operation.

## clock circuit timing


The following table defines the timing parameters for the clock circuit signals.

## switching characteristics over recommended operating conditions for on-chip crystal oscillator<sup>†</sup> (see Figure 16)

| PARAMETER                                                                   | MIN             | TYP       | MAX             | UNIT      |
|-----------------------------------------------------------------------------|-----------------|-----------|-----------------|-----------|
| $V_O$ Oscillator internal supply voltage                                    |                 | $CV_{DD}$ |                 | V         |
| $F_O$ Fundamental mode frequency range                                      | 1               |           | 20              | MHz       |
| $V_{bias}$ DC bias point (input threshold)                                  | 40              | 50        | 60              | % $V_O$   |
| $R_{fbk}$ Feedback resistance                                               | 100             | 300       | 500             | $k\Omega$ |
| $R_{out}$ Small signal AC output impedance                                  | 250             | 500       | 1000            | $\Omega$  |
| $V_{xoutac}$ AC output voltage with test crystal <sup>‡</sup>               |                 | 85        |                 | % $V_O$   |
| $V_{xinac}$ AC input voltage with test crystal <sup>‡</sup>                 |                 | 85        |                 | % $V_O$   |
| $V_{xoutl}$ $V_{xin} = V_{xinh}$ , $I_{xout} = 0$ , $F_O = 0$ (logic input) | $V_{SS} - 0.1$  |           | $V_{SS} + 0.3$  | V         |
| $V_{xouth}$ $V_{xin} = V_{xinl}$ , $I_{xout} = 0$ , $F_O = 0$ (logic input) | $CV_{DD} - 0.3$ |           | $CV_{DD} + 0.1$ | V         |
| $V_{inl}$ When used for logic level input, oscillator enabled               | -0.3            |           | $0.2 * V_O$     | V         |
| $V_{inh}$ When used for logic level input, oscillator enabled               | $0.8 * V_O$     |           | $DV_{DD} + 0.3$ | V         |
| $V_{xinh}$ When used for logic level input, oscillator disabled             | $0.7 * DV_{DD}$ |           | $DV_{DD} + 0.3$ | V         |
| $C_{xout}$ XOUT internal load capacitance                                   | 2               | 3         | 5               | pF        |
| $C_{xin}$ XIN internal load capacitance                                     | 2               | 3         | 5               | pF        |
| $t_d(XIN-H1)$ Delay time, XIN to H1 x1 and x0.5 modes                       | 2               | 5.5       | 8               | ns        |
| $I_{inl}$ Input current, feedback enabled, $V_{il} = 0$                     |                 |           | 50              | $\mu A$   |
| $I_{inh}$ Input current, feedback enabled, $V_{il} = V_{ih}$                |                 |           | -50             | $\mu A$   |

<sup>†</sup> This circuit is intended for series resonant fundamental mode operation.

<sup>‡</sup> Signal amplitude is dependent on the crystal and load used.

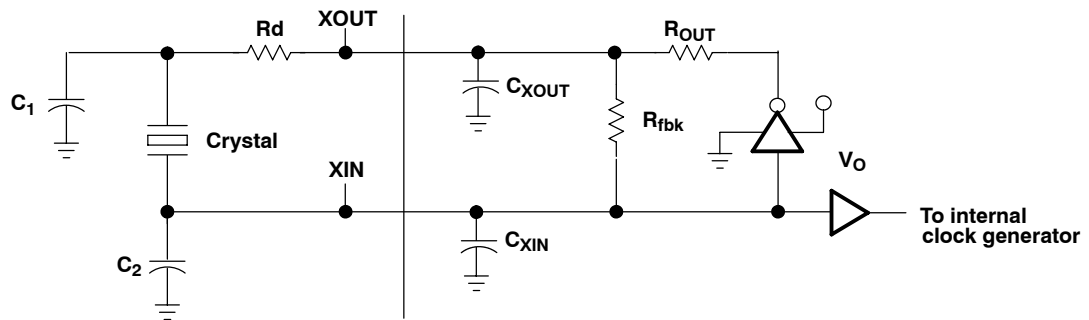

NOTE A: See Table 2 for value of  $R_d$ .

**Figure 16. On-Chip Oscillator Circuit**

# TMS320VC33

## DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

### clock circuit timing (continued)

The following tables define the timing requirements and switching characteristics for EXTCLK.

#### timing requirements for EXTCLK, all modes (see Figure 17 and Figure 18)


|                  |                                                    |                                   | MIN  | MAX | UNIT |
|------------------|----------------------------------------------------|-----------------------------------|------|-----|------|
| $t_{r(EXTCLK)}$  | Rise time, EXTCLK                                  | $F = F_{max}$ , x0.5 and x1 modes |      | 1   | ns   |
|                  |                                                    | $F < F_{max}$                     |      | 4   |      |
| $t_{f(EXTCLK)}$  | Fall time, EXTCLK                                  | $F = F_{max}$ , x0.5 and x1 modes |      | 1   | ns   |
|                  |                                                    | $F < F_{max}$                     |      | 4   |      |
| $t_{w(EXTCLKL)}$ | Pulse duration, EXTCLK low                         | x5 mode                           |      | 21  | ns   |
|                  |                                                    | x1 mode                           |      | 5.5 |      |
|                  |                                                    | x0.5 mode                         |      | 4.0 |      |
| $t_{w(EXTCLKH)}$ | Pulse duration, EXTCLK high                        | x5 mode                           |      | 21  | ns   |
|                  |                                                    | x1 mode                           |      | 5.5 |      |
|                  |                                                    | x0.5 mode                         |      | 4.0 |      |
| $t_{dc(EXTCLK)}$ | Duty cycle, EXTCLK [ $t_{w(EXTCLKH)} / t_{c(H)}$ ] | x5 PLL mode                       | 40   | 60  | %    |
|                  |                                                    | x1 and x0.5 modes, $F = max$      | 45   | 55  |      |
|                  |                                                    | x1 and x0.5 modes, $F = 0$ Hz     | 0    | 100 |      |
| $t_{c(EXTCLK)}$  | Cycle time, EXTCLK, VC33-120                       | x5 mode                           | 83.3 | 200 | ns   |
|                  |                                                    | x1 mode                           | 16.7 |     |      |
|                  |                                                    | x0.5 mode                         | 10   |     |      |
|                  | Cycle time, EXTCLK, VC33-150                       | x5 mode                           | 66.7 | 200 |      |
|                  |                                                    | x1 mode                           | 13.3 |     |      |
|                  |                                                    | x0.5 mode                         | 10   |     |      |
| $F_{ext}$        | Frequency range, $1/t_{c(EXTCLK)}$ , VC33-120      | x5 mode                           | 5    | 12  | MHz  |
|                  |                                                    | x1 mode                           | 0    | 60  |      |
|                  |                                                    | x0.5 mode                         | 0    | 100 |      |
|                  | Frequency range, $1/t_{c(EXTCLK)}$ , VC33-150      | x5 mode                           | 5    | 15  |      |
|                  |                                                    | x1 mode                           | 0    | 75  |      |
|                  |                                                    | x0.5 mode                         | 0    | 100 |      |

#### switching characteristics for EXTCLK over recommended operating conditions, all modes (see Figure 17 and Figure 18)


| PARAMETER         |                                                              |             | MIN  | TYP               | MAX | UNIT |
|-------------------|--------------------------------------------------------------|-------------|------|-------------------|-----|------|
| $V_{mid}$         | Mid-level, used to measure duty cycle                        |             |      | $0.5 * DV_{DD}$   |     | V    |
| $t_{d(EXTCLK-H)}$ | Delay time, EXTCLK to H1 and H3                              | x1 mode     | 2    | 4.5               | 7   | ns   |
|                   |                                                              | x0.5 mode   | 2    | 4.5               | 7   |      |
| $t_{r(H)}$        | Rise time, H1 and H3                                         |             |      |                   | 3   | ns   |
| $t_{f(H)}$        | Fall time, H1 and H3                                         |             |      |                   | 3   | ns   |
| $t_{d(HL-HH)}$    | Delay time, from H1 low to H3 high or from H3 low to H1 high |             | -1.5 |                   | 1.5 | ns   |
| $t_{c(H)}$        | Cycle time, H1 and H3                                        | x5 PLL mode |      | $1/(5 * f_{ext})$ |     | ns   |
|                   |                                                              | x1 mode     |      | $1/f_{ext}$       |     |      |
|                   |                                                              | x0.5 mode   |      | $2/f_{ext}$       |     |      |



**clock circuit timing (continued)**

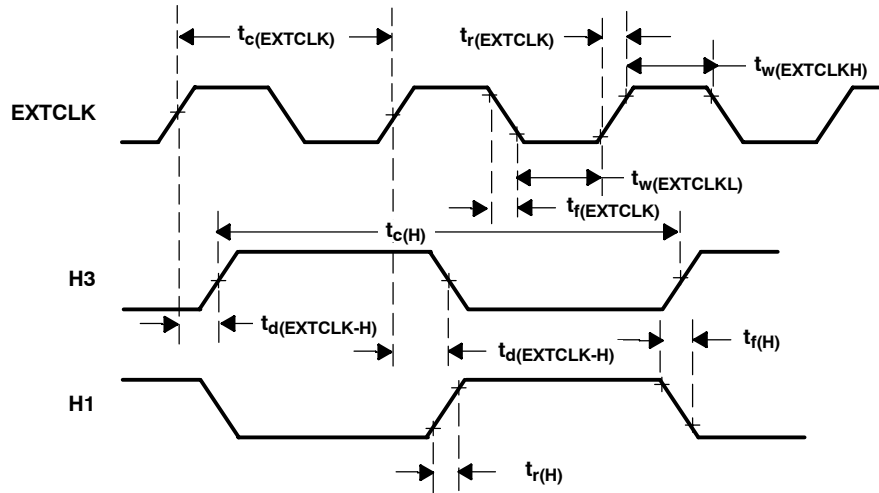

**Figure 17. Divide-By-Two Mode**

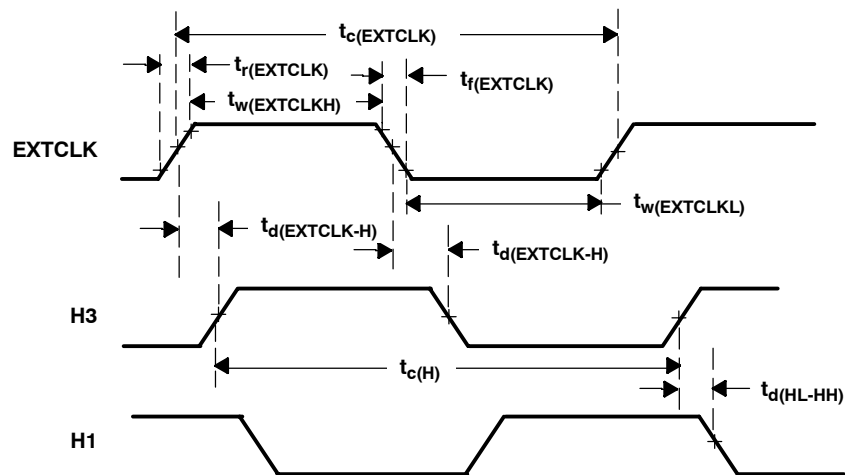

NOTE A: EXTCLK is held low.

**Figure 18. Divide-By-One Mode**

# TMS320VC33

## DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

### memory read/write timing

The following tables define memory read/write timing parameters for  $\overline{\text{STRB}}$ .

#### timing requirements for memory read/write<sup>†</sup> (see Figure 19, Figure 20, and Figure 21)

|                   |                                                                                               | VC33-120                    |                  | VC33-150     |                  | UNIT |
|-------------------|-----------------------------------------------------------------------------------------------|-----------------------------|------------------|--------------|------------------|------|
|                   |                                                                                               | MIN                         | MAX              | MIN          | MAX              |      |
| $t_{su}(D-H1L)R$  | Setup time, Data before H1 low (read)                                                         | 5                           |                  | 5            |                  | ns   |
| $t_h(H1L-D)R$     | Hold time, Data after H1 low (read)                                                           | -1                          |                  | -1           |                  | ns   |
| $t_{su}(RDY-H1H)$ | Setup time, $\overline{\text{RDY}}$ before H1 high                                            | 5                           |                  | 4            |                  | ns   |
| $t_h(H1H-RDY)$    | Hold time, $\overline{\text{RDY}}$ after H1 high                                              | -1                          |                  | -1           |                  | ns   |
| $t_d(A-RDY)$      | Delay time, Address valid to $\overline{\text{RDY}}$                                          |                             | P-7 <sup>‡</sup> |              | P-6 <sup>‡</sup> | ns   |
| $t_v(A-D)$        | Valid time, Data valid after address<br>PAGE <sub>x</sub> , or $\overline{\text{STRB}}$ valid | 0 wait state, $C_L = 30$ pF |                  | 6            |                  | ns   |
|                   |                                                                                               | 1 wait state                |                  | $t_{c(H)}+9$ |                  | ns   |

<sup>†</sup> These timings assume a similar loading of 30 pF on all pins.

<sup>‡</sup> P =  $t_{c(H)}/2$  (when duty cycle equals 50%).

#### switching characteristics over recommended operating conditions for memory read/write<sup>†</sup> (see Figure 19, Figure 20, and Figure 21)

| PARAMETER       |                                                                           | VC33-120 |     | VC33-150 |     | UNIT |
|-----------------|---------------------------------------------------------------------------|----------|-----|----------|-----|------|
|                 |                                                                           | MIN      | MAX | MIN      | MAX |      |
| $t_d(H1L-SL)$   | Delay time, H1 low to $\overline{\text{STRB}}$ low                        | -1       | 4   | -1       | 3   | ns   |
| $t_d(H1L-SH)$   | Delay time, H1 low to $\overline{\text{STRB}}$ high                       | -1       | 4   | -1       | 3   | ns   |
| $t_d(H1H-RWL)W$ | Delay time, H1 high to $\overline{\text{R/W}}$ low (write)                | -1       | 4   | -1       | 3   | ns   |
| $t_d(H1L-A)$    | Delay time, H1 low to address valid                                       | -1       | 4   | -1       | 3   | ns   |
| $t_d(H1H-RWH)W$ | Delay time, H1 high to $\overline{\text{R/W}}$ high (write)               | -1       | 4   | -1       | 3   | ns   |
| $t_d(H1H-A)W$   | Delay time, H1 high to address valid on back-to-back write cycles (write) | -1       | 4   | -1       | 3   | ns   |
| $t_v(H1L-D)W$   | Valid time, Data after H1 low (write)                                     |          | 6   |          | 5   | ns   |
| $t_h(H1H-D)W$   | Hold time, Data after H1 high (write)                                     | 0        | 5   | 0        | 5   | ns   |

<sup>†</sup> These timings assume a similar loading of 30 pF on all pins.

Output load characteristics for high-speed and low-speed (low-noise) output buffers are shown in Figure 19. High-speed buffers are used on A0 - A23, PAGE0 - PAGE3, H1, H3,  $\overline{\text{STRB}}$ , and  $\overline{\text{R/W}}$ . All other outputs use the low-speed, (low-noise) output buffer.


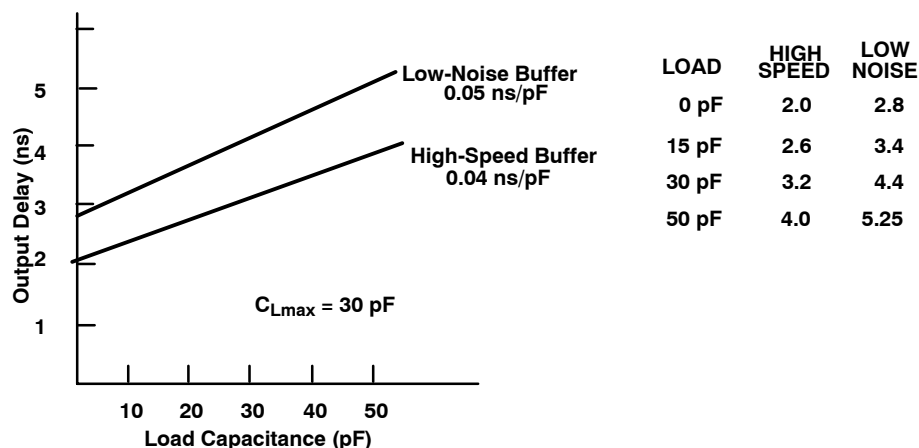


Figure 19. Output Load Characteristics, Buffer Only




**memory read/write timing (continued)**

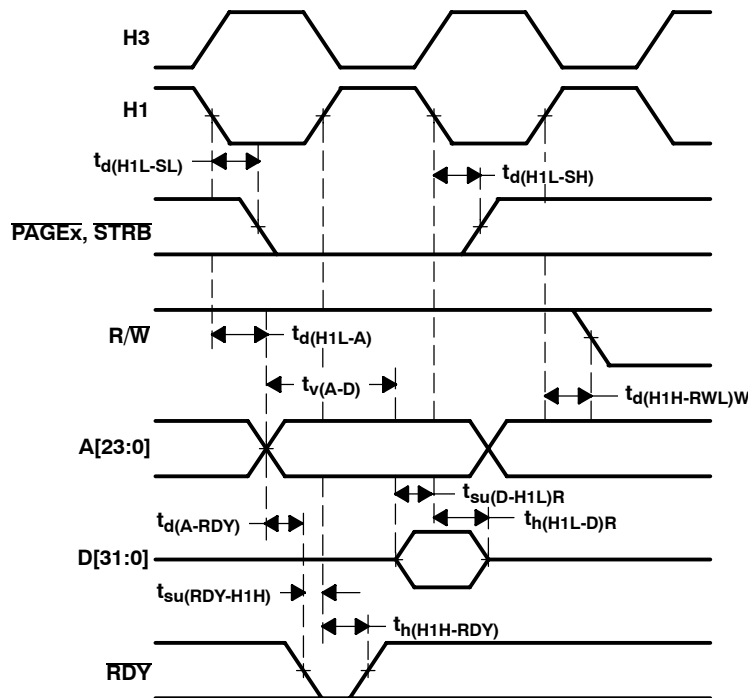

NOTE A: STRB remains low during back-to-back read operations.

**Figure 20. Timing for Memory (STRB = 0 and PAGEX = 0) Read**

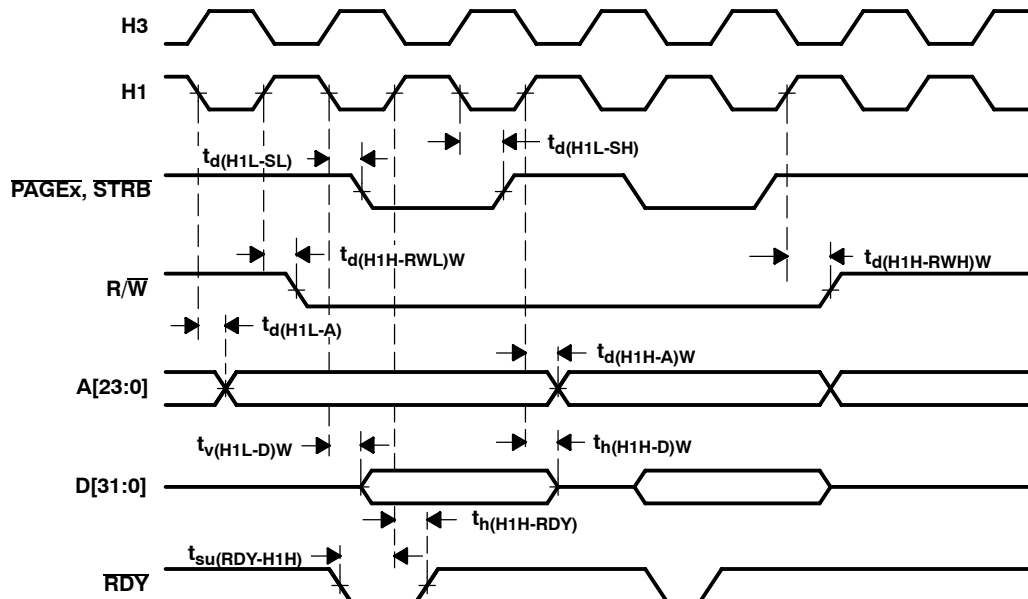

**Figure 21. Timing for Memory (STRB = 0 and PAGEX = 0) Write**

XF0 and XF1 timing when executing LDFI or LDII

The following tables define the timing parameters for XF0 and XF1 during execution of LDFI or LDII.

timing requirements for XF0 and XF1 when executing LDFI or LDII (see Figure 22)

|                   |                               | VC33-120 |     | VC33-150 |     | UNIT |
|-------------------|-------------------------------|----------|-----|----------|-----|------|
|                   |                               | MIN      | MAX | MIN      | MAX |      |
| $t_{su}(XF1-H1L)$ | Setup time, XF1 before H1 low | 5        |     | 4        |     | ns   |
| $t_h(H1L-XF1)$    | Hold time, XF1 after H1 low   | 0        |     | 0        |     | ns   |

switching characteristics over recommended operating conditions for XF0 and XF1 when executing LDFI or LDII (see Figure 22)

| PARAMETER       | VC33-120 |     | VC33-150 |     | UNIT |
|-----------------|----------|-----|----------|-----|------|
|                 | MIN      | MAX | MIN      | MAX |      |
| $t_d(H3H-XF0L)$ | 4        |     | 3        |     | ns   |

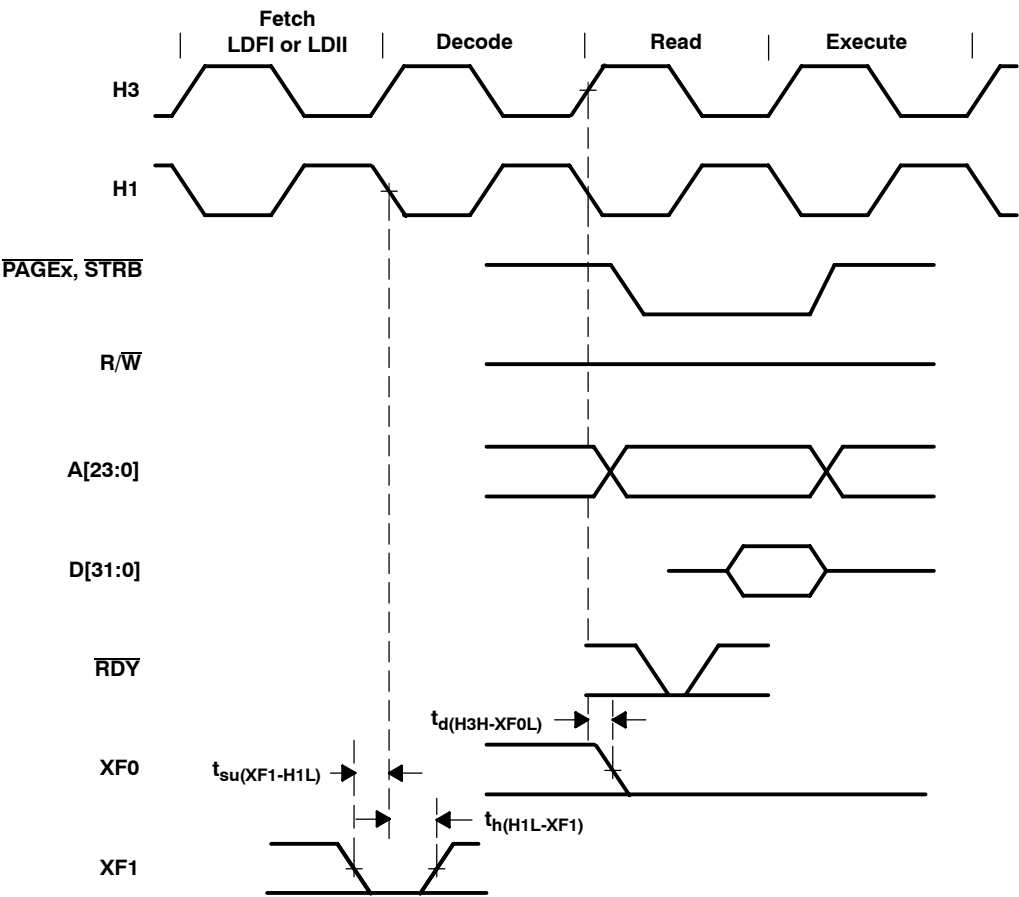


Figure 22. Timing for XF0 and XF1 When Executing LDFI or LDII

XF0 timing when executing STFI and STII†

The following table defines the timing parameters for the XF0 pin during execution of STFI or STII.

switching characteristics over recommended operating conditions for XF0 when executing STFI or STII (see Figure 23)

| PARAMETER                                          | VC33-120 |     | VC33-150 |     | UNIT |
|----------------------------------------------------|----------|-----|----------|-----|------|
|                                                    | MIN      | MAX | MIN      | MAX |      |
| $t_{d(H3H-XF0H)}$ Delay time, H3 high to XF0 high† |          | 4   |          | 3   | ns   |

† XF0 is always set high at the beginning of the execute phase of the interlock-store instruction. When no pipeline conflicts occur, the address of the store is also driven at the beginning of the execute phase of the interlock-store instruction. However, if a pipeline conflict prevents the store from executing, the address of the store will not be driven until the store can execute.

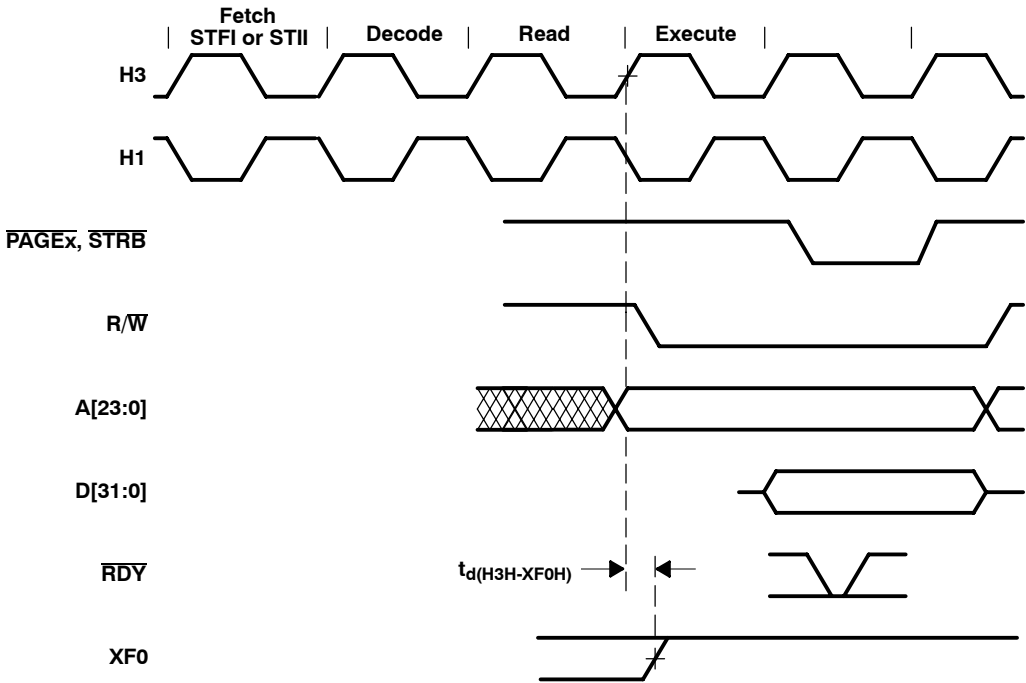


Figure 23. Timing for XF0 When Executing an STFI or STII

TMS320VC33  
DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

XF0 and XF1 timing when executing SIGI

The following tables define the timing parameters for the XF0 and XF1 pins during execution of SIGI.

timing requirements for XF0 and XF1 when executing SIGI (see Figure 24)

|                   |                               | VC33-120 |     | VC33-150 |     | UNIT |
|-------------------|-------------------------------|----------|-----|----------|-----|------|
|                   |                               | MIN      | MAX | MIN      | MAX |      |
| $t_{su}(XF1-H1L)$ | Setup time, XF1 before H1 low | 5        |     | 4        |     | ns   |
| $t_h(H1L-XF1)$    | Hold time, XF1 after H1 low   | 0        |     | 0        |     | ns   |

switching characteristics over recommended operating conditions for XF0 and XF1 when executing SIGI (see Figure 24)

| PARAMETER       | VC33-120 |     | VC33-150 |     | UNIT |
|-----------------|----------|-----|----------|-----|------|
|                 | MIN      | MAX | MIN      | MAX |      |
| $t_d(H3H-XF0L)$ |          | 4   |          | 3   | ns   |
| $t_d(H3H-XF0H)$ |          | 4   |          | 3   | ns   |

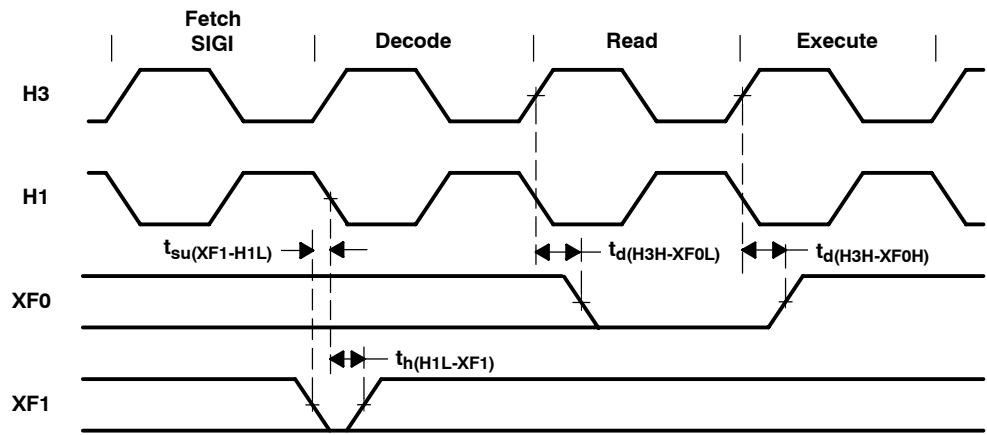



Figure 24. Timing for XF0 and XF1 When Executing SIGI

loading when XF is configured as an output

The following table defines the timing parameter for loading the XF register when the XFx pin is configured as an output.

switching characteristics over recommended operating conditions for loading the XF register when configured as an output pin (see Figure 25)

| PARAMETER                                     | VC33-120 |     | VC33-150 |     | UNIT |
|-----------------------------------------------|----------|-----|----------|-----|------|
|                                               | MIN      | MAX | MIN      | MAX |      |
| $t_{v(H3H-XF)}$ Valid time, XFx after H3 high |          | 4   |          | 3   | ns   |

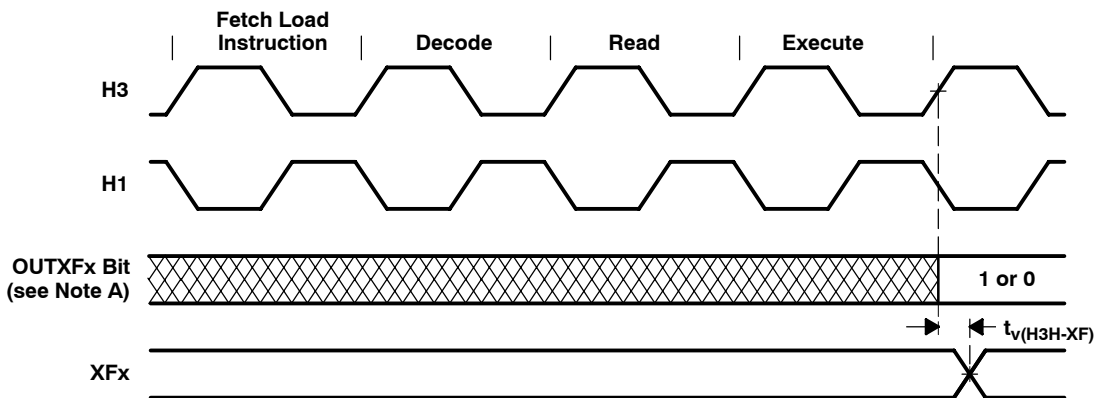

NOTE A: OUTXFx represents either bit 2 or 6 of the IOF register.

Figure 25. Timing for Loading XF Register When Configured as an Output Pin

changing XFx from an output to an input


The following tables define the timing parameters for changing the XFx pin from an output pin to an input pin.

timing requirements for changing XFx from output to input mode (see Figure 26)

|                  |                               | VC33-120 |     | VC33-150 |     | UNIT |
|------------------|-------------------------------|----------|-----|----------|-----|------|
|                  |                               | MIN      | MAX | MIN      | MAX |      |
| $t_{su}(XF-H1L)$ | Setup time, XFx before H1 low | 5        |     | 4        |     | ns   |
| $t_h(H1L-XF)$    | Hold time, XFx after H1 low   | 0        |     | 0        |     | ns   |

switching characteristics over recommended operating conditions for changing XFx from output to input mode (see Figure 26)

| PARAMETER         | VC33-120 |     | VC33-150 |     | UNIT |
|-------------------|----------|-----|----------|-----|------|
|                   | MIN      | MAX | MIN      | MAX |      |
| $t_{dis}(H3H-XF)$ | 6        |     | 5        |     | ns   |

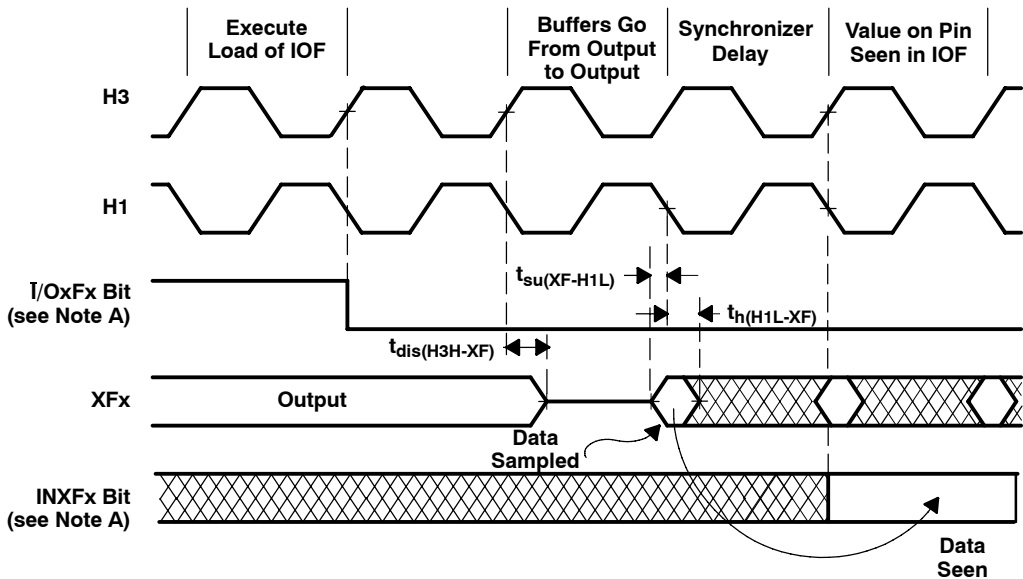

NOTE A: I/OxFx represents either bit 1 or bit 5 of the IOF register, and INXFx represents either bit 3 or bit 7 of the IOF register.


Figure 26. Timing for Changing XFx From Output to Input Mode

changing XFx from an input to an output

The following table defines the timing parameter for changing the XFx pin from an input pin to an output pin.

switching characteristics over recommended operating conditions for changing XFx from input to output mode (see Figure 27)

| PARAMETER                                                                 | VC33-120 |     | VC33-150 |     | UNIT |
|---------------------------------------------------------------------------|----------|-----|----------|-----|------|
|                                                                           | MIN      | MAX | MIN      | MAX |      |
| $t_{d(H3H-XF)}$ Delay time, H3 high to XFx switching from input to output | 4        |     | 3        |     | ns   |

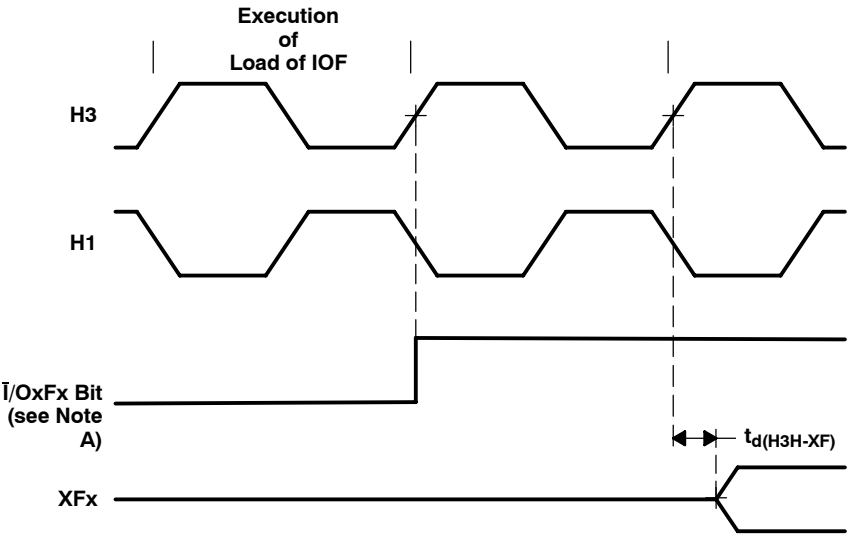

NOTE A: I/OxFx represents either bit 1 or bit 5 of the IOF register.

Figure 27. Timing for Changing XFx From Input to Output Mode

# TMS320VC33

## DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

### reset timing

$\overline{\text{RESET}}$  is an asynchronous input that can be asserted at any time during a clock cycle. If the specified timings are met, the exact sequence shown in Figure 28 occurs; otherwise, an additional delay of one clock cycle is possible.

The asynchronous reset signals include XF0/1, CLKX0, DX0, FSX0, CLKR0, DR0, FSR0, and TCLK0/1.

Resetting the device initializes the bus control register to seven software wait states and therefore results in slow external accesses until these registers are initialized.

$\overline{\text{HOLD}}$  is a synchronous input that can be asserted during reset. It can take nine CPU cycles before  $\overline{\text{HOLDA}}$  is granted.

The following tables define the timing parameters for the  $\overline{\text{RESET}}$  signal.

### timing requirements for $\overline{\text{RESET}}$ (see Figure 28)

|                                |                                                                                        | VC33-120 |                  | VC33-150 |     | UNIT |
|--------------------------------|----------------------------------------------------------------------------------------|----------|------------------|----------|-----|------|
|                                |                                                                                        | MIN      | MAX              | MIN      | MAX |      |
| $t_{su}(\text{RESET-EXTCLKL})$ | Setup time, $\overline{\text{RESET}}$ before EXTCLK low                                | 6        | P-7 <sup>†</sup> | 5        | P-7 | ns   |
| $t_{su}(\text{RESET-H1L})$     | Setup time, $\overline{\text{RESET}}$ high before H1 low and after ten H1 clock cycles | 6        |                  | 5        |     | ns   |

<sup>†</sup> P =  $t_c(\text{EXTCLK})$

### switching characteristics over recommended operating conditions for $\overline{\text{RESET}}$ (see Figure 28)

| PARAMETER                       |                                                                                                                    | VC33-120 |     | VC33-150 |     | UNIT |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------|----------|-----|----------|-----|------|
|                                 |                                                                                                                    | MIN      | MAX | MIN      | MAX |      |
| $t_d(\text{EXTCLKH-H1H})$       | Delay time, EXTCLK high to H1 high                                                                                 | 2        | 7   | 2        | 7   | ns   |
| $t_d(\text{EXTCLKH-H1L})$       | Delay time, EXTCLK high to H1 low                                                                                  | 2        | 7   | 2        | 7   | ns   |
| $t_d(\text{EXTCLKH-H3L})$       | Delay time, EXTCLK high to H3 low                                                                                  | 2        | 7   | 2        | 7   | ns   |
| $t_d(\text{EXTCLKH-H3H})$       | Delay time, EXTCLK high to H3 high                                                                                 | 2        | 7   | 2        | 7   | ns   |
| $t_{dis}(\text{H1H-DZ})$        | Disable time, data (high impedance) from H1 high <sup>‡</sup>                                                      |          | 7   |          | 6   | ns   |
| $t_{dis}(\text{H3H-AZ})$        | Disable time, address (high impedance) from H3 high                                                                |          | 7   |          | 6   | ns   |
| $t_d(\text{H3H-CONTROLH})$      | Delay time, H3 high to control signals high                                                                        |          | 4   |          | 3   | ns   |
| $t_d(\text{H1H-RWH})$           | Delay time, H1 high to R/ $\overline{\text{W}}$ high                                                               |          | 4   |          | 3   | ns   |
| $t_d(\text{H1H-IACKH})$         | Delay time, H1 high to $\overline{\text{IACK}}$ high                                                               |          | 4   |          | 3   | ns   |
| $t_{dis}(\text{RESETL-ASYNCH})$ | Disable time, asynchronous reset signals disabled (high impedance) from $\overline{\text{RESET}}$ low <sup>§</sup> |          | 7   |          | 6   | ns   |


<sup>‡</sup> High impedance for Dbus is limited to nominal bus keeper  $Z_{OUT} = 15 \text{ k}\Omega$ .

<sup>§</sup> Asynchronous reset signals include XF0/1, CLKX0, DX0, FSX0, CLKR0, DR0, FSR0, and TCLK0/1.





## reset timing (continued)

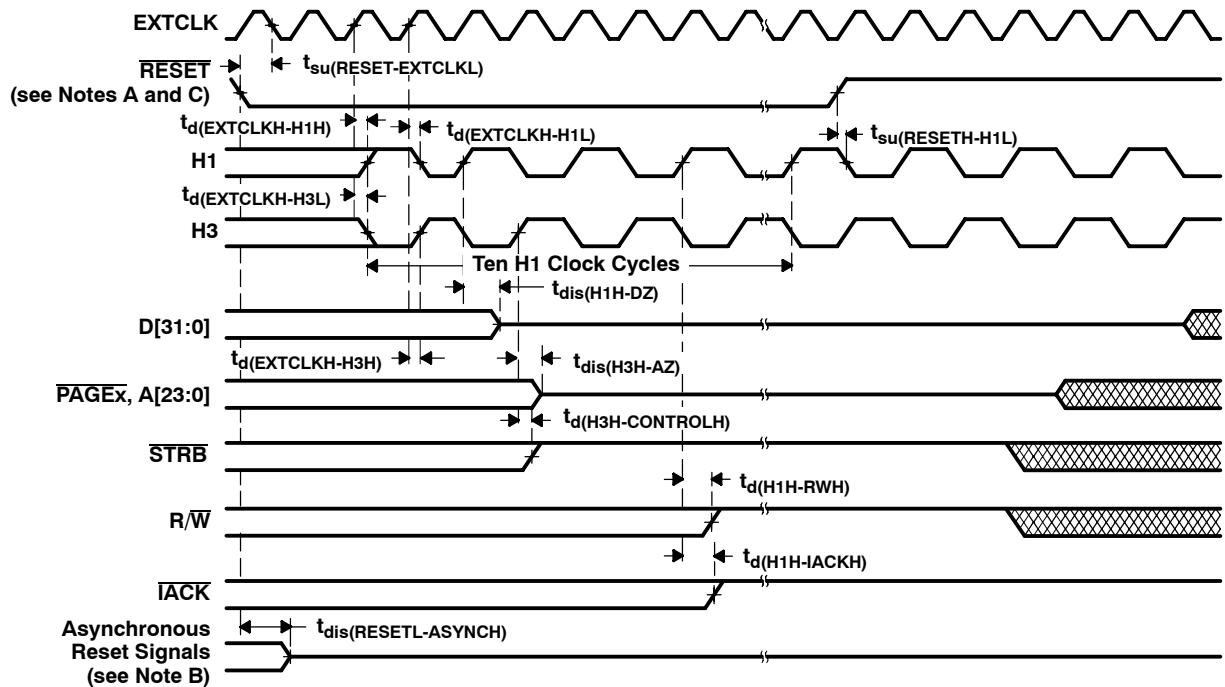

- NOTES:
- Clock circuit is configured in 'C31-compatible divide-by-2 mode. If configured for x1 mode, EXTCLK directly drives H3.
  - Asynchronous reset signals include XF0/1, CLKX0, DX0, FSX0, CLKR0, DR0, FSR0, and TCLK0/1.
  - RESET is a synchronous input that can be asserted at any point during a clock cycle. If the specified timings are met, the exact sequence shown occurs; otherwise, an additional delay of one clock cycle is possible.
  - In microprocessor mode, the reset vector is fetched twice, with seven software wait states each time. In microcomputer mode, the reset vector is fetched twice, with no software wait states.
  - The address and PAGE3-PAGE0 outputs are placed in a high-impedance state during reset requiring a nominal 10-22 kΩ pullup. If not, undesirable spurious reads can occur when these outputs are not driven.

**Figure 28. RESET Timing**

# TMS320VC33

## DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

### interrupt response timing

The following table defines the timing parameters for the  $\overline{\text{INTx}}$  signals.

#### timing requirements for $\overline{\text{INT3}}\text{--}\overline{\text{INT0}}$ response (see Figure 29)

|                                                    |                                                                                   | VC33-120         |      |                   | VC33-150         |      |                   | UNIT |
|----------------------------------------------------|-----------------------------------------------------------------------------------|------------------|------|-------------------|------------------|------|-------------------|------|
|                                                    |                                                                                   | MIN              | NOM  | MAX               | MIN              | NOM  | MAX               |      |
| $t_{\text{su}}(\overline{\text{INT}}\text{--H1L})$ | Setup time, $\overline{\text{INT3}}\text{--}\overline{\text{INT0}}$ before H1 low | 5                |      |                   | 4                |      |                   | ns   |
| $t_{\text{h}}(\text{H1L--INT})$                    | Hold time, $\overline{\text{INT3}}\text{--}\overline{\text{INT0}}$ after H1 low   |                  |      | 0                 |                  |      | 0                 | ns   |
| $t_{\text{w}}(\text{INT})$                         | Pulse duration, interrupt to ensure only one interrupt                            | P+5 <sup>†</sup> | 1.5P | 2P-5 <sup>†</sup> | P+5 <sup>†</sup> | 1.5P | 2P-5 <sup>†</sup> | ns   |

<sup>†</sup> P =  $t_{\text{c}}(\text{H})$

The interrupt ( $\overline{\text{INTx}}$ ) pins are synchronized inputs that can be asserted at any time during a clock cycle. The TMS320C3x interrupts are selectable as level- or edge-sensitive. Interrupts are detected on the falling edge of H1. Therefore, interrupts must be set up and held to the falling edge of the internal H1 for proper detection. The CPU and DMA respond to detected interrupts on instruction-fetch boundaries only.

For the processor to recognize only one interrupt when level mode is selected, an interrupt pulse must be set up and held such that a logic-low condition occurs for:


- A minimum of one H1 falling edge
- No more than two H1 falling edges
- Interrupt sources whose edges cannot be ensured to meet the H1 falling edge setup and hold times must be further restricted in pulse width as defined by  $t_{\text{w}}(\text{INT})$  (parameter 51) in the table above.

When  $\text{EDGEMODE}=1$ , the falling edge of the  $\overline{\text{INT0}}\text{--}\overline{\text{INT3}}$  pins are detected using synchronous logic (see Figure 7). The pulse low and high time should be two CPU clocks or greater.

The TMS320C3x can set the interrupt flag from the same source as quickly as two H1 clock cycles after it has been cleared.

If the specified timings are met, the exact sequence shown in Figure 29 occurs; otherwise, an additional delay of one clock cycle is possible.

**interrupt response timing (continued)**

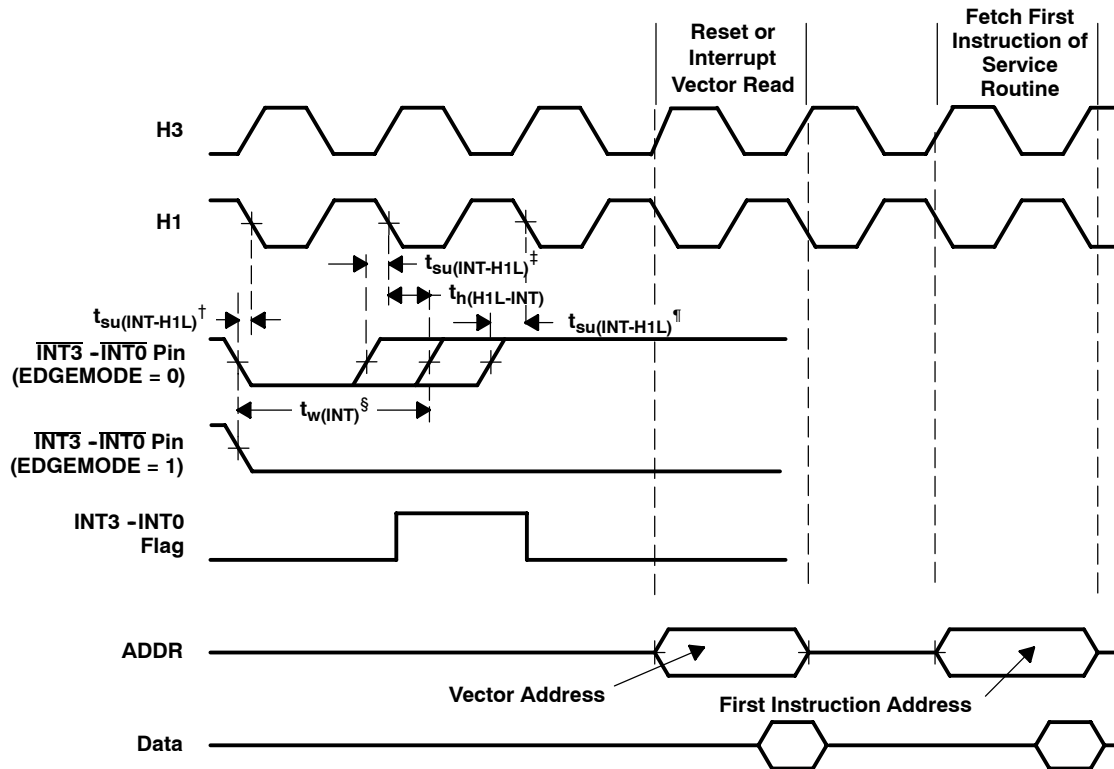

† Falling edge of H1 just detects  $\overline{INTx}$  falling edge.

‡ Falling edge of H1 detects second  $\overline{INTx}$  low, however flag clear takes precedence.

§ Nominal width

¶ Falling edge of H1 misses previous  $\overline{INTx}$  low as  $\overline{INTx}$  rises.

**Figure 29. INT3-INT0 Response Timing**

interrupt-acknowledge timing

The  $\overline{\text{IACK}}$  output goes active on the first half-cycle (H1 rising) of the decode phase of the IACK instruction and goes inactive at the first half-cycle (H1 rising) of the read phase of the IACK instruction.

The following table defines the timing parameters for the  $\overline{\text{IACK}}$  signal.

**NOTE:** The IACK instruction can be executed at anytime to signal an event using the  $\overline{\text{IACK}}$  pin. The IACK instruction is most often used within an interrupt routine to signal which interrupt has occurred. The IACK instruction must be executed to generate the  $\overline{\text{IACK}}$  pulse.

switching characteristics over recommended operating conditions for  $\overline{\text{IACK}}$  (see Figure 30)

| PARAMETER          |                                                      | VC33-120 |     | VC33-150 |     | UNIT |
|--------------------|------------------------------------------------------|----------|-----|----------|-----|------|
|                    |                                                      | MIN      | MAX | MIN      | MAX |      |
| $t_{d(H1H-IACKL)}$ | Delay time, H1 high to $\overline{\text{IACK}}$ low  | -1       | 4   | -1       | 3   | ns   |
| $t_{d(H1H-IACKH)}$ | Delay time, H1 high to $\overline{\text{IACK}}$ high | -1       | 4   | -1       | 3   | ns   |

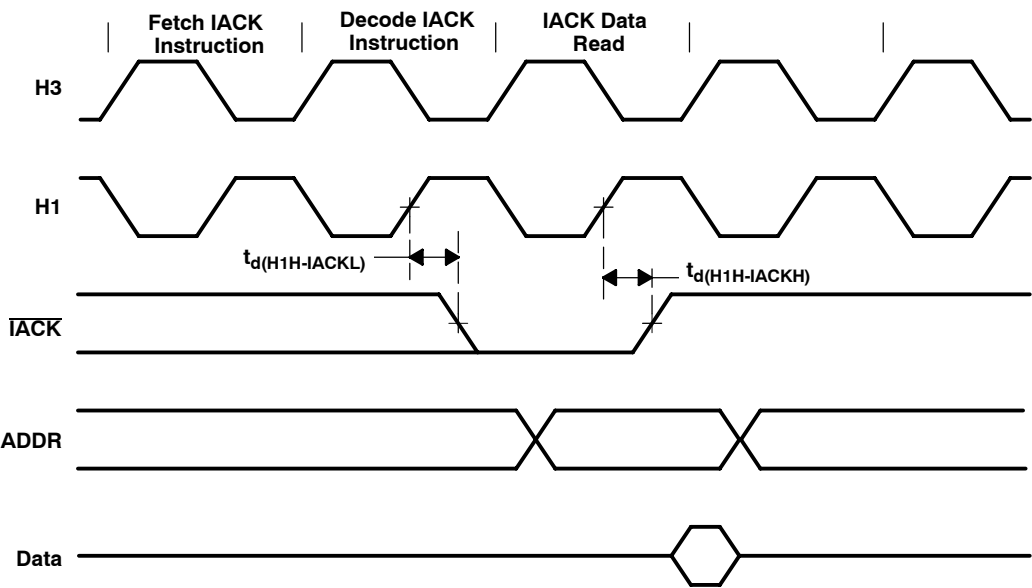


Figure 30. Interrupt Acknowledge ( $\overline{\text{IACK}}$ ) Timing

## serial-port timing parameters

The following tables define the timing parameters for the serial port.

### timing requirements (see Figure 31 and Figure 32)

|                     |                                         | MIN        | MAX                                       | UNIT |
|---------------------|-----------------------------------------|------------|-------------------------------------------|------|
| $t_{c(SCK)}$        | Cycle time, CLKX/R                      | CLKX/R ext | $t_{c(H)} * 2.6$                          | ns   |
|                     |                                         | CLKX/R int | $t_{c(H)} * 2$ $t_{c(H)} * 2^{16}$        |      |
| $t_{w(SCK)}$        | Pulse duration, CLKX/R high/low         | CLKX/R ext | $t_{c(H)} + 5$                            | ns   |
|                     |                                         | CLKX/R int | $[t_{c(SCK)}/2] - 4$ $[t_{c(SCK)}/2] + 4$ |      |
| $t_r(SCK)$          | Rise time, CLKX/R                       |            | 3                                         | ns   |
| $t_f(SCK)$          | Fall time, CLKX/R                       |            | 3                                         | ns   |
| $t_{su(DR-CLKRL)}$  | Setup time, DR before CLKR low          | CLKR ext   | 4                                         | ns   |
|                     |                                         | CLKR int   | 5                                         |      |
| $t_h(CLKRL-DR)$     | Hold time, DR after CLKR low            | CLKR ext   | 3                                         | ns   |
|                     |                                         | CLKR int   | 0                                         |      |
| $t_{su(FSR-CLKRL)}$ | Setup time, FSR before CLKR low         | CLKR ext   | 4                                         | ns   |
|                     |                                         | CLKR int   | 5                                         |      |
| $t_h(SCKL-FS)$      | Hold time, FSX/R input after CLKX/R low | CLKX/R ext | 3                                         | ns   |
|                     |                                         | CLKX/R int | 0                                         |      |
| $t_{su(FSX-CLKX)}$  | Setup time, external FSX before CLKX    | CLKX ext   | $-[t_{c(H)} - 6]$ $[t_{c(SCK)}/2] - 6$    | ns   |
|                     |                                         | CLKX int   | $-[t_{c(H)} - 10]$ $t_{c(SCK)}/2$         |      |

### switching characteristics over recommended operating conditions (see Figure 31 and Figure 32)


| PARAMETER           |                                                                        | MIN      | MAX | UNIT |
|---------------------|------------------------------------------------------------------------|----------|-----|------|
| $t_d(H1H-SCK)$      | Delay time, H1 high to internal CLKX/R                                 |          | 4   | ns   |
| $t_d(CLKX-DX)$      | Delay time, CLKX to DX valid                                           | CLKX ext | 6   | ns   |
|                     |                                                                        | CLKX int | 5   |      |
| $t_d(CLKX-FSX)$     | Delay time, CLKX to internal FSX high/low                              | CLKX ext | 5   | ns   |
|                     |                                                                        | CLKX int | 4   |      |
| $t_d(CLKX-DX)V$     | Delay time, CLKX to first DX bit, FSX precedes CLKX high               | CLKX ext | 5   | ns   |
|                     |                                                                        | CLKX int | 4   |      |
| $t_d(FSX-DX)V$      | Delay time, FSX to first DX bit, CLKX precedes FSX                     |          | 6   | ns   |
| $t_{dis}(CLKX-DXZ)$ | Disable time, DX high impedance following last data bit from CLKX high |          | 6   | ns   |

# TMS320VC33 DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004


## data-rate timing modes

Unless otherwise indicated, the data-rate timings shown in Figure 31 and Figure 32 are valid for all serial-port modes, including handshake. For a functional description of serial-port operation, see the *TMS320C3x User's Guide* (literature number SPRU031).

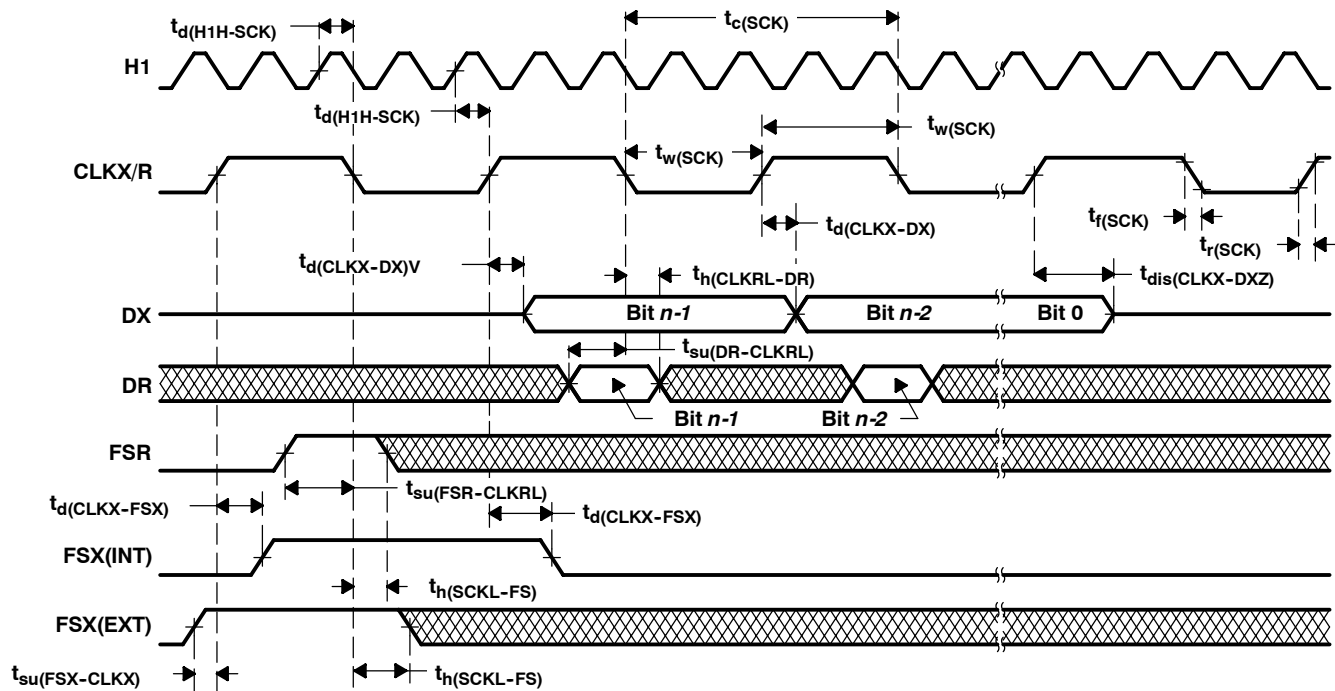

- NOTES: A. Timing diagrams show operations with CLKXP = CLKRP = FSXP = FSRP = 0.  
B. Timing diagrams depend on the length of the serial-port word, where  $n = 8, 16, 24$ , or  $32$  bits, respectively.

**Figure 31. Fixed Data-Rate Mode Timing**

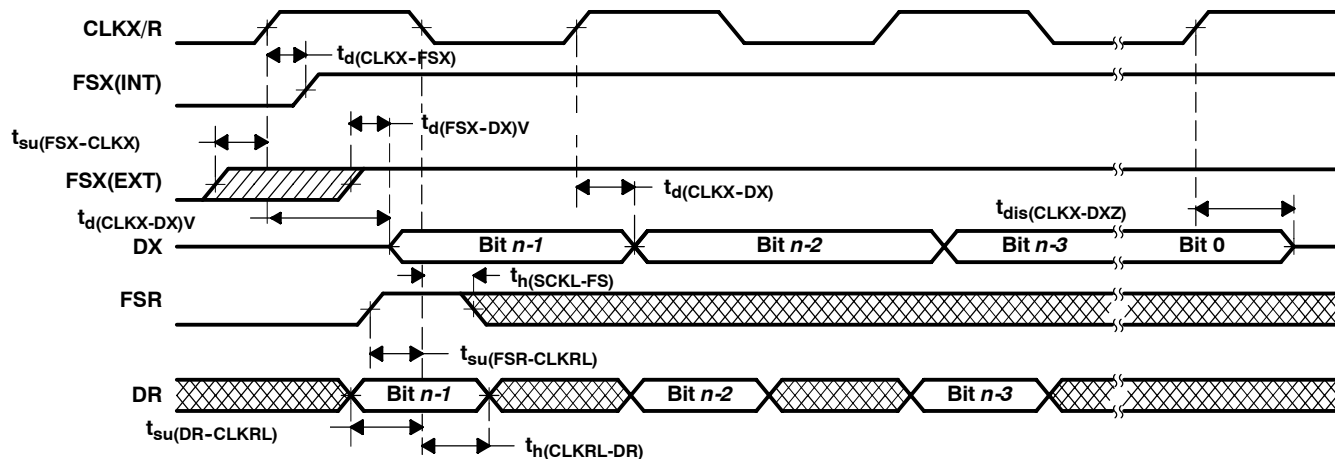

- NOTES: A. Timing diagrams show operation with CLKXP = CLKRP = FSXP = FSRP = 0.  
B. Timing diagrams depend on the length of the serial-port word, where  $n = 8, 16, 24$ , or  $32$  bits, respectively.  
C. The timings that are not specified expressly for the variable data-rate mode are the same as those that are specified for the fixed data-rate mode.

**Figure 32. Variable Data-Rate Mode Timing**

## **HOLD timing**

$\overline{\text{HOLD}}$  is a synchronous input that can be asserted at any time during a clock cycle. If the specified timings are met, the exact sequence shown in Figure 33 and Figure 34 occurs; otherwise, an additional delay of one clock cycle is possible.

The table, "timing parameters for  $\overline{\text{HOLD}}/\overline{\text{HOLDA}}$ ", defines the timing parameters for the  $\overline{\text{HOLD}}$  and  $\overline{\text{HOLDA}}$  signals. The NOHOLD bit of the primary-bus control register overrides the  $\overline{\text{HOLD}}$  signal. When this bit is set, the device comes out of hold and prevents future hold cycles.

Asserting  $\overline{\text{HOLD}}$  prevents the processor from accessing the primary bus. Program execution continues until a read from or a write to the primary bus is requested. In certain circumstances, the first write is pending, therefore, allowing the processor to continue (internally) until a second external write is encountered.

Figure 33, Figure 34, and the accompanying timings are for a zero wait-state bus configuration. Since  $\overline{\text{HOLD}}$  is internally captured by the CPU on the H1 falling edge one cycle before the present cycle is terminated, the minimum  $\overline{\text{HOLD}}$  width for any bus configuration is, therefore, WTCNT+3. Also,  $\overline{\text{HOLD}}$  should not be deasserted before  $\overline{\text{HOLDA}}$  has been active for at least one cycle.


## **timing requirements for $\overline{\text{HOLD}}/\overline{\text{HOLDA}}$ (see Figure 33 and Figure 34)**

|                                                    |                                                    | VC33-120           |     | VC33-150           |     | UNIT |
|----------------------------------------------------|----------------------------------------------------|--------------------|-----|--------------------|-----|------|
|                                                    |                                                    | MIN                | MAX | MIN                | MAX |      |
| $t_{\text{su}}(\overline{\text{HOLD}}\text{-H1L})$ | Setup time, $\overline{\text{HOLD}}$ before H1 low | 4                  |     | 3                  |     | ns   |
| $t_{\text{w}}(\overline{\text{HOLD}})$             | Pulse duration, $\overline{\text{HOLD}}$ low       | $3t_{\text{c(H)}}$ |     | $3t_{\text{c(H)}}$ |     | ns   |

## **switching characteristics over recommended operating conditions for $\overline{\text{HOLD}}/\overline{\text{HOLDA}}$ (see Figure 33 and Figure 34)**


| PARAMETER                               |                                                                                    | VC33-120               |     | VC33-150               |     | UNIT |
|-----------------------------------------|------------------------------------------------------------------------------------|------------------------|-----|------------------------|-----|------|
|                                         |                                                                                    | MIN                    | MAX | MIN                    | MAX |      |
| $t_{\text{v}}(\text{H1L-HOLDA})$        | Valid time, $\overline{\text{HOLDA}}$ after H1 low                                 | -1                     | 4   | -1                     | 3   | ns   |
| $t_{\text{w}}(\overline{\text{HOLDA}})$ | Pulse duration, $\overline{\text{HOLDA}}$ low                                      | $2t_{\text{c(H)}} - 4$ |     | $2t_{\text{c(H)}} - 4$ |     | ns   |
| $t_{\text{d}}(\text{H1L-SH})\text{H}$   | Delay time, H1 low to $\overline{\text{STRB}}$ high for a $\overline{\text{HOLD}}$ | -1                     | 4   | -1                     | 3   | ns   |
| $t_{\text{dis}}(\text{H1L-S})$          | Disable time, $\overline{\text{STRB}}$ to the high-impedance state from H1 low     |                        | 5   |                        | 4   | ns   |
| $t_{\text{en}}(\text{H1L-S})$           | Enable time, $\overline{\text{STRB}}$ enabled (active) from H1 low                 |                        | 5   |                        | 5   | ns   |
| $t_{\text{dis}}(\text{H1L-RW})$         | Disable time, R/ $\overline{\text{W}}$ to the high-impedance state from H1 low     |                        | 5   |                        | 4   | ns   |
| $t_{\text{en}}(\text{H1L-RW})$          | Enable time, R/ $\overline{\text{W}}$ enabled (active) from H1 low                 |                        | 5   |                        | 5   | ns   |
| $t_{\text{dis}}(\text{H1L-A})$          | Disable time, Address to the high-impedance state from H1 low                      |                        | 5   |                        | 4   | ns   |
| $t_{\text{en}}(\text{H1L-A})$           | Enable time, Address enabled (valid) from H1 low                                   |                        | 5   |                        | 5   | ns   |
| $t_{\text{dis}}(\text{H1H-D})$          | Disable time, Data to the high-impedance state from H1 high                        |                        | 5   |                        | 4   | ns   |

**HOLD timing (continued)**

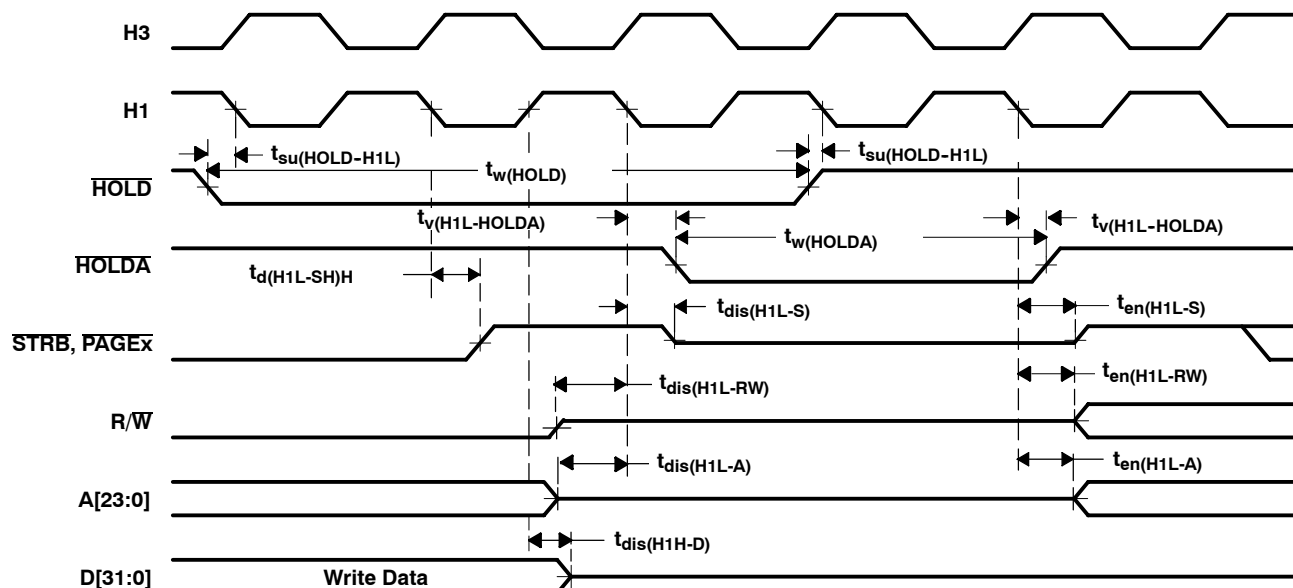

NOTE A:  $\overline{\text{HOLDA}}$  goes low in response to  $\overline{\text{HOLD}}$  going low and continues to remain low until one H1 cycle after  $\overline{\text{HOLD}}$  goes back high.

**Figure 33. Timing for  $\overline{\text{HOLD}}/\overline{\text{HOLDA}}$  (After Write)**

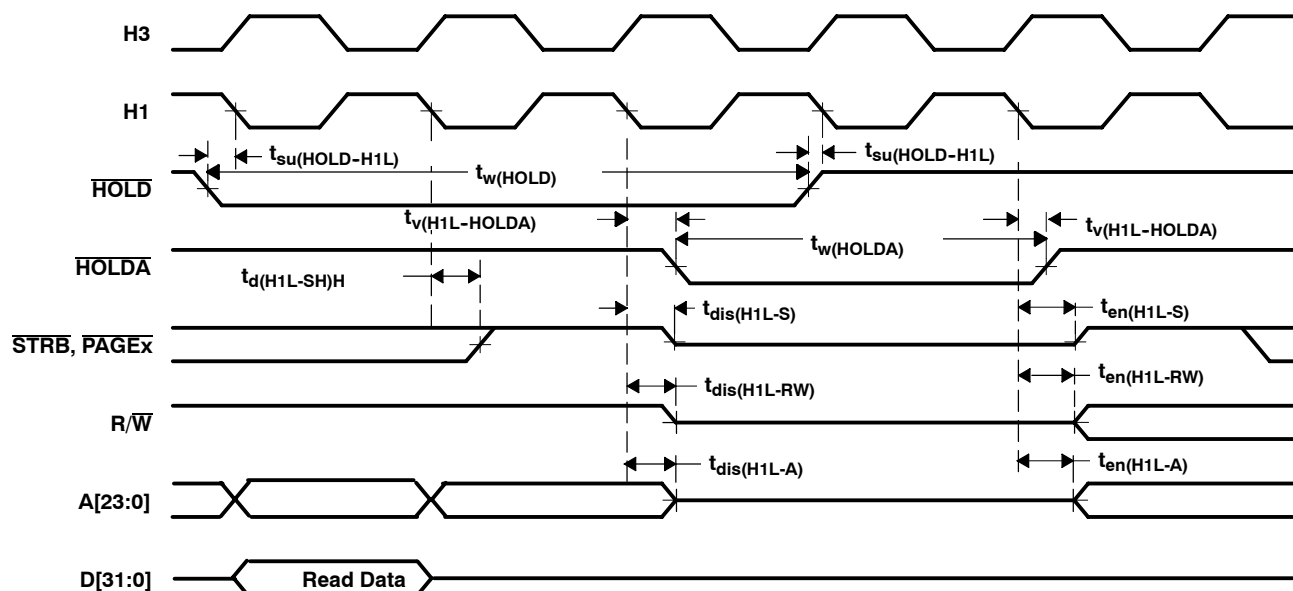

NOTE A:  $\overline{\text{HOLDA}}$  goes low in response to  $\overline{\text{HOLD}}$  going low and continues to remain low until one H1 cycle after  $\overline{\text{HOLD}}$  goes back high.

**Figure 34. Timing for  $\overline{\text{HOLD}}/\overline{\text{HOLDA}}$  (After Read)**



## general-purpose I/O timing

Peripheral pins include CLKX0, CLKR0, DX0, DR0, FSX0, FSR0, and TCLK0/1. The contents of the internal control registers associated with each peripheral define the modes for these pins.

## peripheral pin I/O timing

The following tables show the timing parameters for changing the peripheral pin from a general-purpose output pin to a general-purpose input pin and vice versa.

### timing requirements for peripheral pin general-purpose I/O (see Note 1, Figure 35, and Figure 36)


|                                                                    | VC33-120 |     | VC33-150 |     | UNIT |
|--------------------------------------------------------------------|----------|-----|----------|-----|------|
|                                                                    | MIN      | MAX | MIN      | MAX |      |
| $t_{su}(GPIO-H1L)$ Setup time, general-purpose input before H1 low | 4        |     | 3        |     | ns   |
| $t_h(H1L-GPIO)$ Hold time, general-purpose input after H1 low      | 0        |     | 0        |     | ns   |

NOTE 1: Peripheral pins include CLKX0, CLKR0, DX0, DR0, FSX0, FSR0, and TCLK0/1. The modes of these pins are defined by the contents of internal-control registers associated with each peripheral.

### switching characteristics over recommended operating conditions for peripheral pin general-purpose I/O (see Note 1, Figure 35, and Figure 36)

| PARAMETER                                                        | VC33-120 |     | VC33-150 |     | UNIT |
|------------------------------------------------------------------|----------|-----|----------|-----|------|
|                                                                  | MIN      | MAX | MIN      | MAX |      |
| $t_d(H1H-GPIO)$ Delay time, H1 high to general-purpose output    |          | 5   |          | 4   | ns   |
| $t_{dis}(H1H)$ Disable time, general-purpose output from H1 high |          | 7   |          | 5   | ns   |

NOTE 1: Peripheral pins include CLKX0, CLKR0, DX0, DR0, FSX0, FSR0, and TCLK0/1. The modes of these pins are defined by the contents of internal-control registers associated with each peripheral.

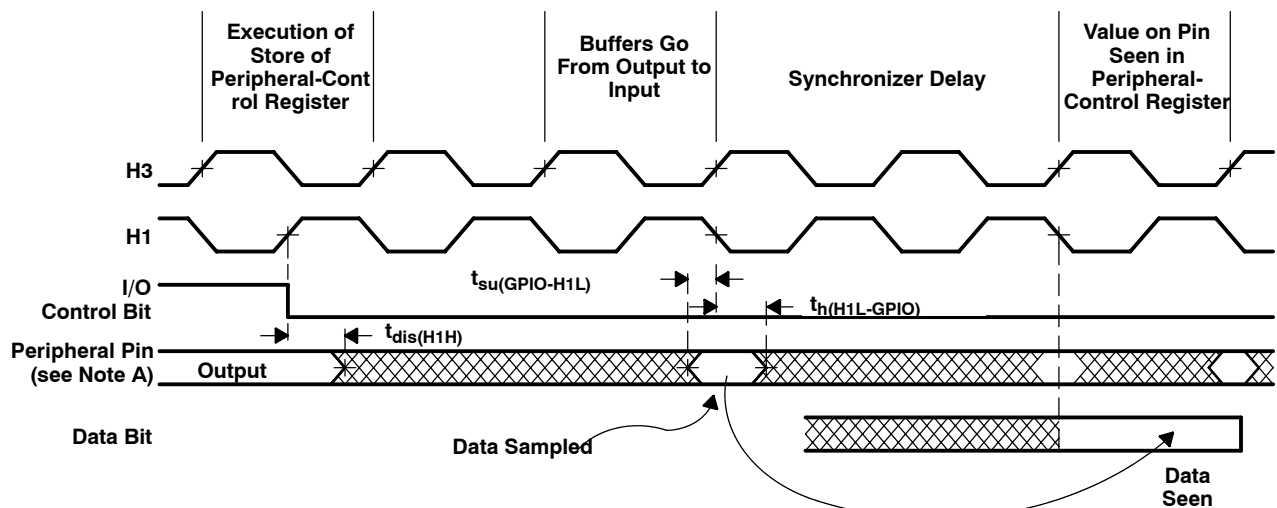


NOTE A: Peripheral pins include CLKX0, CLKR0, DX0, DR0, FSX0, FSR0, and TCLK0/1.

**Figure 35. Change of Peripheral Pin From General-Purpose Output to Input Mode Timing**

# TMS320VC33 DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

## peripheral pin I/O timing (continued)

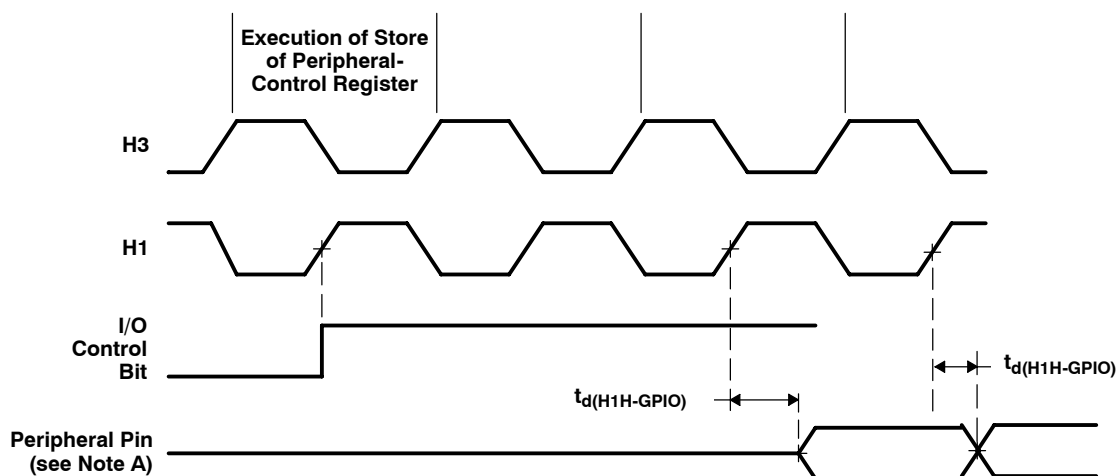

NOTE A: Peripheral pins include CLKX0, CLKR0, DX0, DR0, FSX0, FSR0, and TCLK0/1.

**Figure 36. Change of Peripheral Pin From General-Purpose Input to Output Mode Timing**

## timer pin timing

Valid logic-level periods and polarity are specified by the contents of the internal control registers. The following tables define the timing parameters for the timer pin.

### timing requirements for timer pin (see Figure 37 and Figure 38)


|                              |                                         | VC33-120 |     | VC33-150 |     | UNIT |
|------------------------------|-----------------------------------------|----------|-----|----------|-----|------|
|                              |                                         | MIN      | MAX | MIN      | MAX |      |
| $t_{su(TCLK-H1L)}^{\dagger}$ | Setup time, TCLK external before H1 low | 4        |     | 3        |     | ns   |
| $t_{h(H1L-TCLK)}^{\dagger}$  | Hold time, TCLK external after H1 low   | 0        |     | 0        |     | ns   |

<sup>†</sup> These requirements are applicable for a synchronous input clock.


### switching characteristics over recommended operating conditions for timer pin (see Figure 37 and Figure 38)

| PARAMETER                |                                            | VC33-120 |                                             | VC33-150              |                       | UNIT |
|--------------------------|--------------------------------------------|----------|---------------------------------------------|-----------------------|-----------------------|------|
|                          |                                            | MIN      | MAX                                         | MIN                   | MAX                   |      |
| $t_{d(H1H-TCLK)}$        | Delay time, H1 high to TCLK internal valid | 4        |                                             | 3                     |                       | ns   |
| $t_{c(TCLK)}^{\ddagger}$ | Cycle time, TCLK                           | TCLK ext | $t_{c(H)} * 2.6$                            | $t_{c(H)} * 2.6$      |                       | ns   |
|                          |                                            | TCLK int | $t_{c(H)} * 2$ $t_{c(H)} * 2^{32}$          | $t_{c(H)} * 2$        | $t_{c(H)} * 2^{32}$   |      |
| $t_{w(TCLK)}^{\ddagger}$ | Pulse duration, TCLK                       | TCLK ext | $t_{c(H)} + 6$                              | $t_{c(H)} + 5$        |                       | ns   |
|                          |                                            | TCLK int | $[t_{c(TCLK)}/2] - 4$ $[t_{c(TCLK)}/2] + 4$ | $[t_{c(TCLK)}/2] - 4$ | $[t_{c(TCLK)}/2] + 4$ |      |

<sup>‡</sup> These parameters are applicable for an asynchronous input clock.

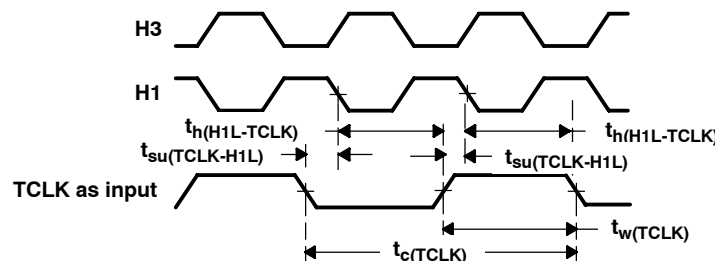

**Figure 37. Timer Pin Timing, Input**

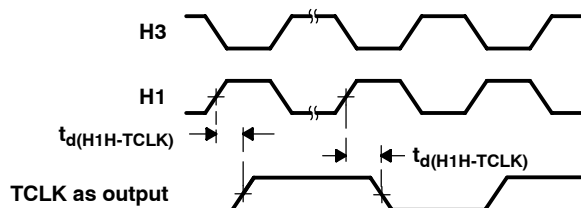

**Figure 38. Timer Pin Timing, Output**

TMS320VC33  
DIGITAL SIGNAL PROCESSOR


SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

SHZ pin timing

The following table defines the timing parameter for the SHZ pin.

switching characteristics over recommended operating conditions for SHZ (see Figure 39)

| PARAMETER              |                                                                          | MIN | MAX | UNIT |
|------------------------|--------------------------------------------------------------------------|-----|-----|------|
| t <sub>dis</sub> (SHZ) | Disable time, SHZ low to all outputs, I/O pins disabled (high impedance) | 0   | 8   | ns   |

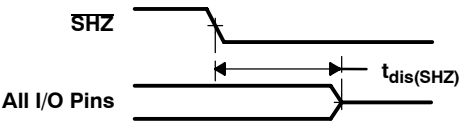

NOTE A: Enabling SHZ destroys TMS320VC33 register and memory contents. Assert SHZ = 1 and reset the TMS320VC33 to restore it to a known condition.

Figure 39. Timing for SHZ

IEEE-1149.1 test access port timing

The following table defines the timing parameter for the IEEE-1149.1 test access port.

timing for IEEE-1149.1 test access port (see Figure 40)

|                    |                                  | VC33-120 |     | VC33-150 |     | UNIT |
|--------------------|----------------------------------|----------|-----|----------|-----|------|
|                    |                                  | MIN      | MAX | MIN      | MAX |      |
| $t_{su}(TMS-TCKH)$ | Setup time, TMS/TDI to TCK high  | 5        |     | 5        |     | ns   |
| $t_h(TCKH-TMS)$    | Hold time, TMS/TDI from TCK high | 5        |     | 5        |     | ns   |
| $t_d(TCKL-TDOV)$   | Delay time, TCK low to TDO valid | 0        | 10  | 0        | 10  | ns   |
| $t_r(TCK)$         | Rise time, TCK                   |          | 3   |          | 3   | ns   |
| $t_f(TCK)$         | Fall time, TCK                   |          | 3   |          | 3   | ns   |

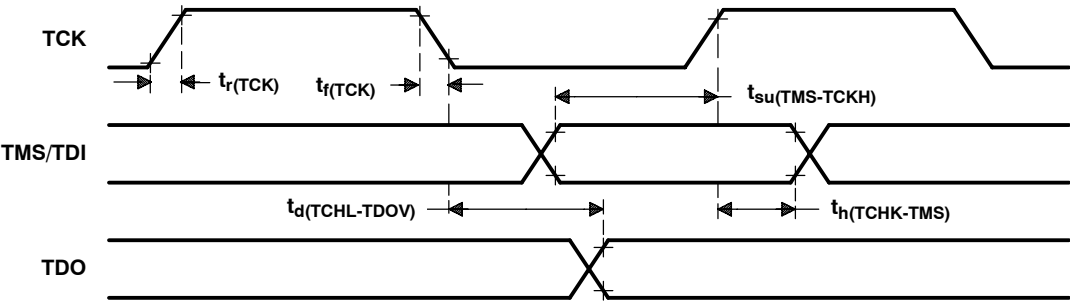


Figure 40. IEEE-1149.1 Test Access Port Timings


# TMS320VC33 DIGITAL SIGNAL PROCESSOR

SPRS087E - FEBRUARY 1999 - REVISED JANUARY 2004

## MECHANICAL DATA

PGE (S-PQFP-G144)

PLASTIC QUAD FLATPACK

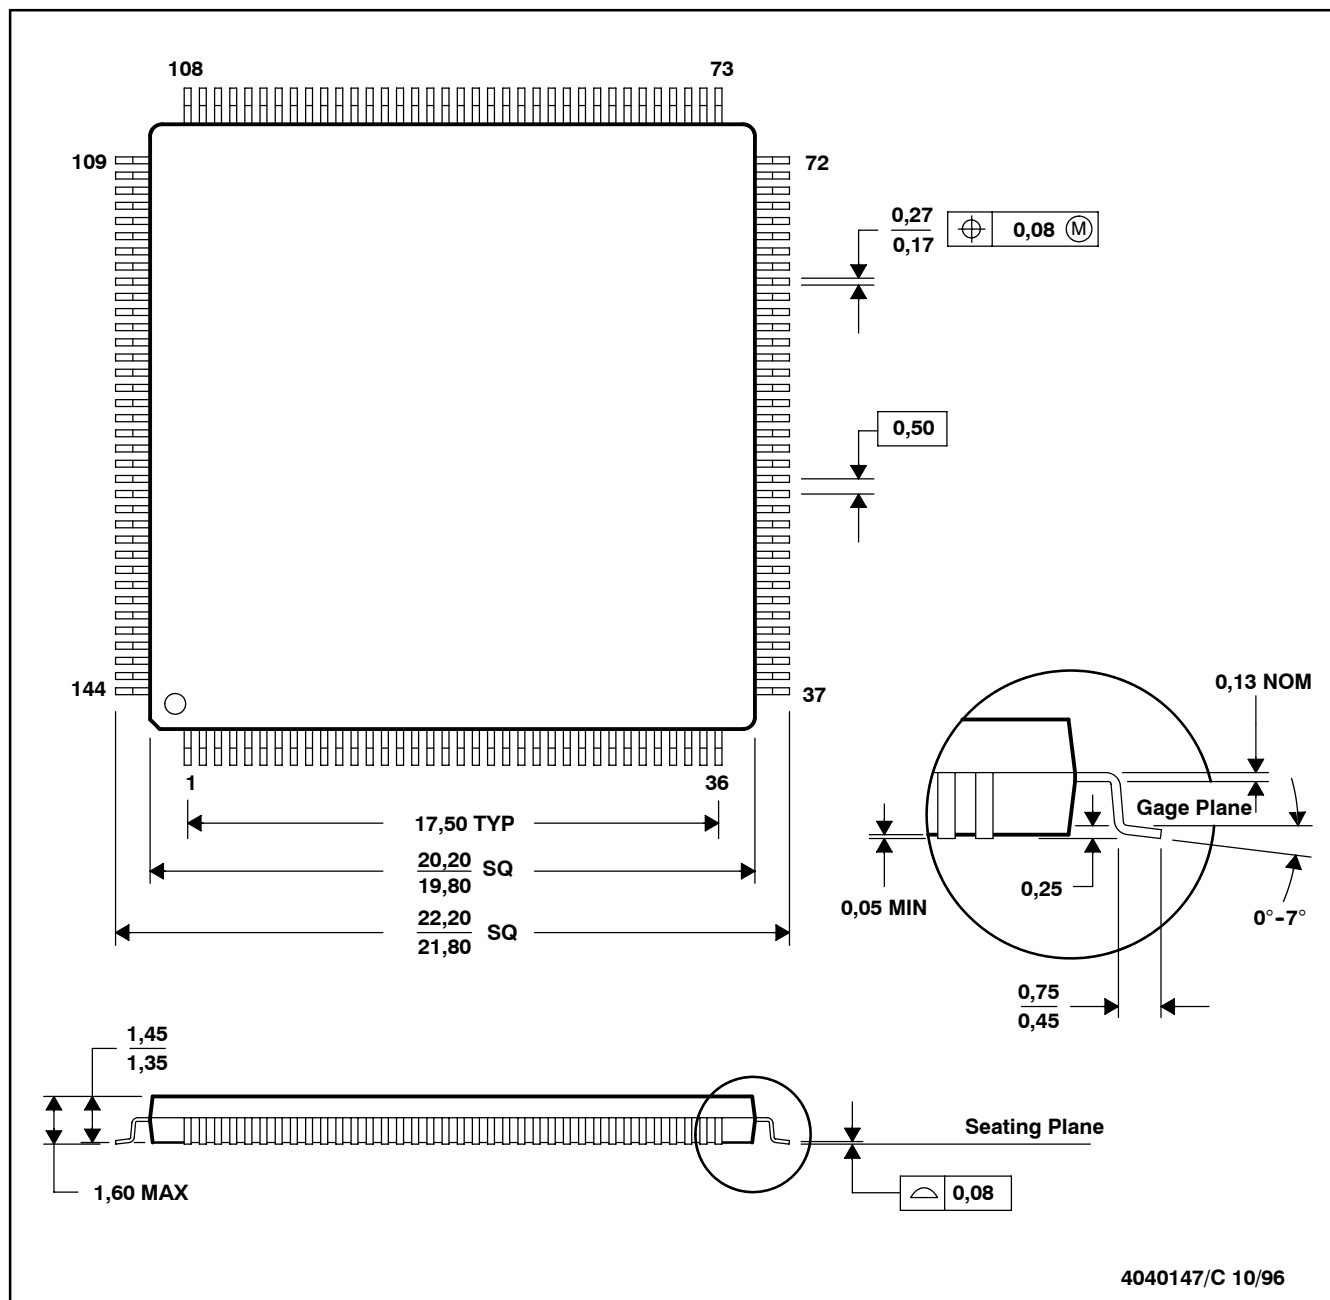

- NOTES: A. All linear dimensions are in millimeters.  
B. This drawing is subject to change without notice.  
C. Falls within JEDEC MS-026

### Thermal Resistance Characteristics

| PARAMETER       | °C/W |
|-----------------|------|
| $R_{\theta JA}$ | 56   |
| $R_{\theta JC}$ | 5    |

**PACKAGING INFORMATION**

| Orderable Device   | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup>    | Lead/<br>Ball Finish | MSL Peak Temp <sup>(3)</sup> | Samples<br>(Requires Login) |
|--------------------|-----------------------|--------------|-----------------|------|-------------|----------------------------|----------------------|------------------------------|-----------------------------|
| TMS320VC33PGE120   | NRND                  | LQFP         | PGE             | 144  | 60          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU            | Level-1-260C-UNLIM           |                             |
| TMS320VC33PGE120G4 | NRND                  | LQFP         | PGE             | 144  | 1           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU            | Level-1-260C-UNLIM           |                             |
| TMS320VC33PGE150   | NRND                  | LQFP         | PGE             | 144  | 60          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU            | Level-1-260C-UNLIM           |                             |
| TMS320VC33PGE60    | OBSOLETE              | LQFP         | PGE             | 144  |             | TBD                        | Call TI              | Call TI                      |                             |
| TMS320VC33PGEA120  | NRND                  | LQFP         | PGE             | 144  | 60          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU            | Level-1-260C-UNLIM           |                             |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TMS320VC33 :**

- Catalog: [SM320VC33](#)
- Enhanced Product: [SM320VC33-EP](#)
- Military: [SMJ320VC33](#)


## NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Enhanced Product - Supports Defense, Aerospace and Medical Applications
- Military - QML certified for Military and Defense Applications



## PGE (S-PQFP-G144)

## PLASTIC QUAD FLATPACK

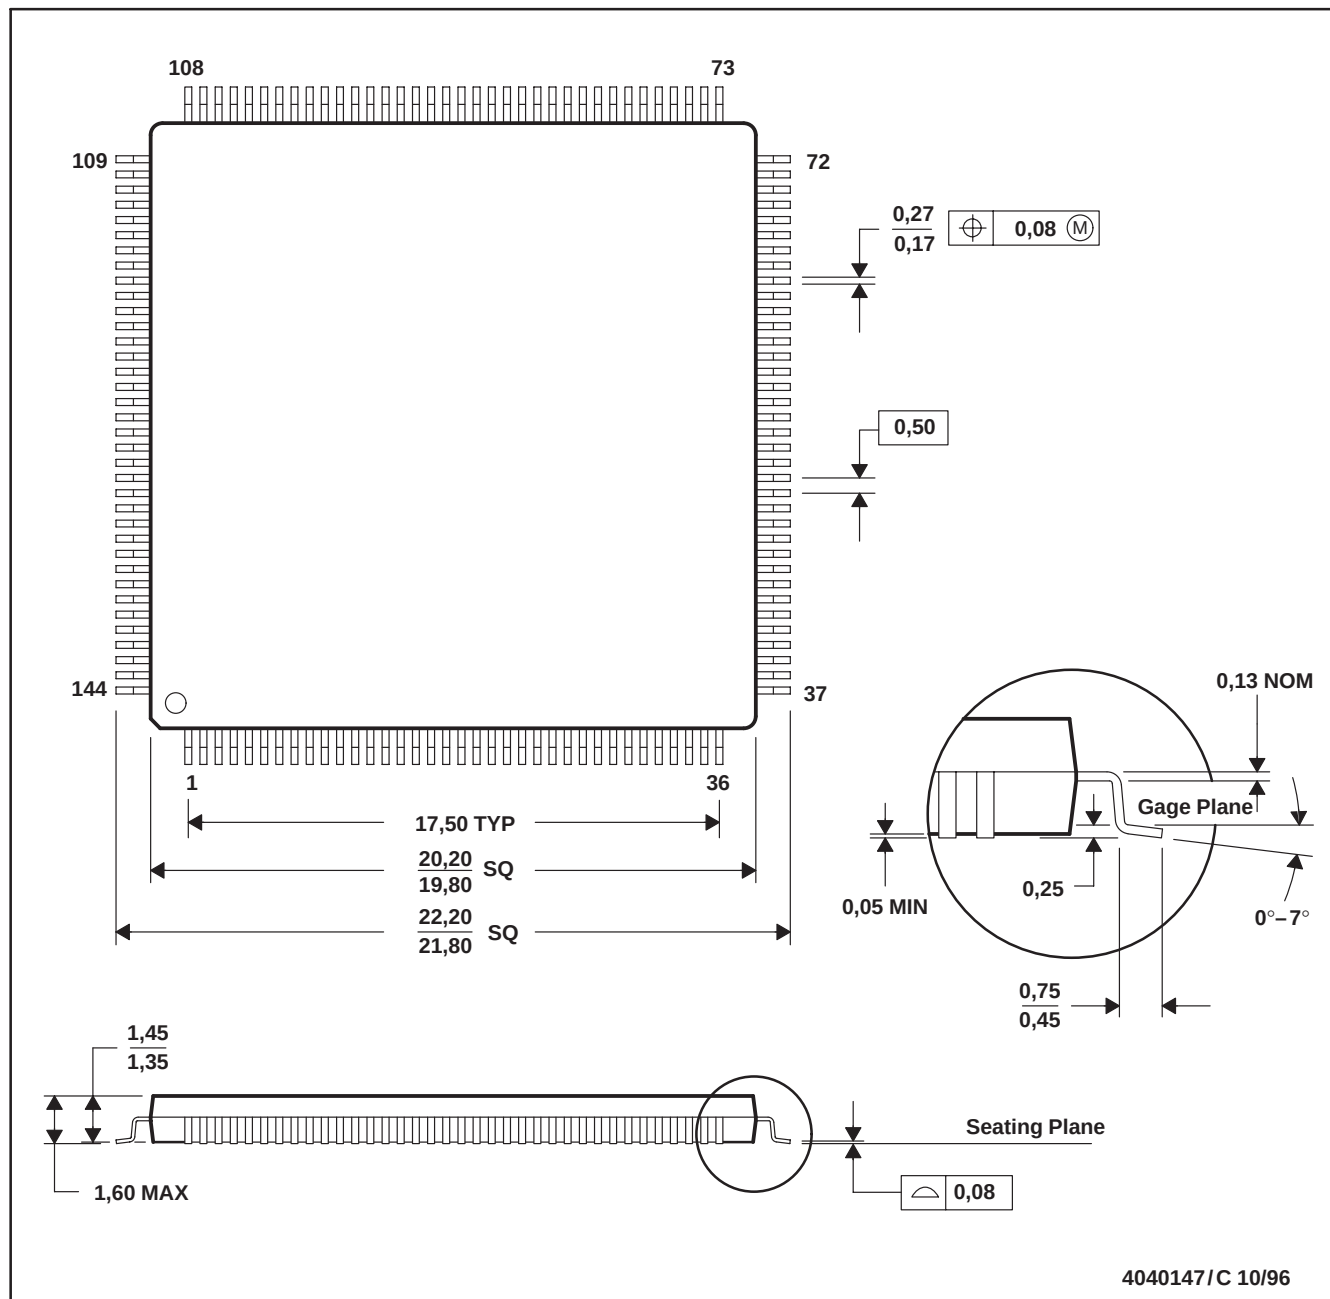

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Falls within JEDEC MS-026

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46C and to discontinue any product or service per JESD48B. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use. Components which have not been so designated are neither designed nor intended for automotive use; and TI will not be responsible for any failure of such components to meet such requirements.

### Products

|                        |                                                                                      |
|------------------------|--------------------------------------------------------------------------------------|
| Audio                  | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers             | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters        | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products          | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                    | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers      | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface              | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                  | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt             | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers       | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                   | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Mobile Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity  | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

**TI E2E Community** [e2e.ti.com](http://e2e.ti.com)