

FEATURES

- Maximum Offset Voltage: 1mV
- Maximum Bias Current: 15nA
- Typical Output Drive: 70mA
- Operates from 1.1V to 40V
- Internal Pull-Up Current
- Output Can Drive Loads Above V^+
- 30 μ A Supply Current (LT1017)
- 110 μ A Supply Current (LT1018)

APPLICATIONS

- Power Supply Monitors
- Relay Driving
- Oscillators

DESCRIPTION

The LT[®]1017/LT1018 are general purpose micropower comparators. The LT1017 is optimized for lowest operating power while the LT1018 operates at higher power and higher speed. Both devices can operate from a single 1.1V cell up to 40V. The output stage includes a class “B” pull-up current source, eliminating the need for an external resistive pull-up and saving power. The output stage is also designed to allow driving loads connected to a supply more positive than the device, as can comparators with open-collector output stages.


Input specifications are also excellent. On-chip trimming minimizes offset voltage, while high gain and common mode rejection ratio keep other input referred errors low. Common mode voltage range includes ground. Special circuitry prevents false output states even if the input is overdriven.

The LT1017/LT1018 are pin compatible with older dual comparators such as 393 type devices.


 LTC and LT are registered trademarks of Linear Technology Corporation.

TYPICAL APPLICATION

1.5V Powered Refrigerator Alarm

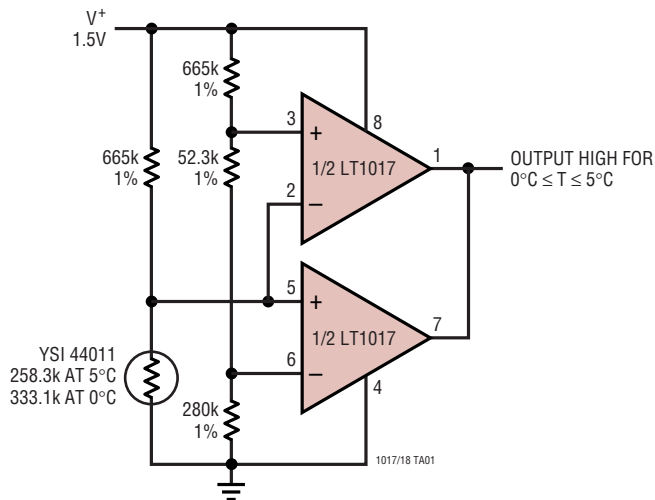

Supply Current

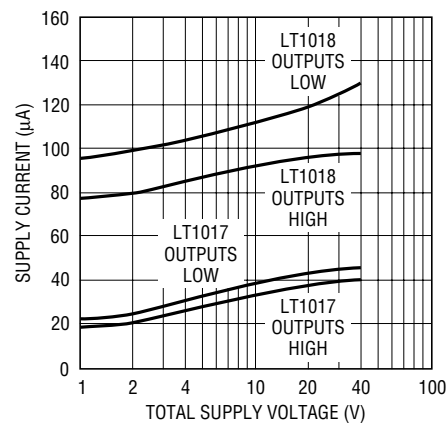

LT1017/LT1018

ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage	40V	Operating Temperature Range	
Differential Input Voltage	40V	LT1017M/LT1018M	-55°C to 125°C
Input Voltage	-0.3V to 40V	LT1017C/LT1018C	0°C to 70°C
Short-Circuit Duration	Indefinite	LT1017I	-40°C to 85°C
Storage Temperature Range	-65°C to 150°C	Lead Temperature (Soldering, 10 sec)	300°C

PACKAGE/ORDER INFORMATION

<p>H PACKAGE 8-LEAD TO-5 METAL CAN $T_{JMAX} = 150^{\circ}C, \theta_{JA} = 150^{\circ}C/W, \theta_{JC} = 45^{\circ}C/W$</p>	<p>N8 PACKAGE 8-LEAD PDIP $T_{JMAX} = 150^{\circ}C, \theta_{JA} = 130^{\circ}C/W$</p>	<p>S8 PACKAGE 8-LEAD PLASTIC SO $T_{JMAX} = 150^{\circ}C, \theta_{JA} = 190^{\circ}C/W$</p>	
ORDER PART NUMBER	ORDER PART NUMBER	ORDER PART NUMBER	S8 PART MARKING
LT1017MH LT1017CH LT1018MH LT1018CH OBSOLETE	LT1017CN8 LT1017IN8 LT1018CN8	LT1017CS8 LT1017IS8 LT1018CS8	1017 1017I 1018

Consult factory for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the operating temperature range of -55°C to 85°C for M grade parts, -40°C to 85°C for I grade parts and 0°C to 70°C for C grade parts.

PARAMETER	CONDITIONS		LT1017			LT1018			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Offset Voltage (Note 2)	$\pm 0.75V \leq V_S \leq \pm 20V$	25°C	0.4	1		0.4	1	mV	
		●	0.5	1.4		0.5	1.4	mV	
		125°C			5		0.7	1.5	mV
Bias Current	$\pm 0.75V \leq V_S \leq \pm 20V$	25°C	5	15		15	75	nA	
		●	7	25		18	100	nA	
		125°C	10	60			110	nA	
Offset Current	$\pm 0.75V \leq V_S \leq \pm 20V$	25°C	0.4	2		1	8	nA	
		●	0.5	3		1.6	12	nA	
		125°C		20			20	nA	
Common Mode Rejection Ratio	$V_S = \pm 20V, -20V \leq V_{CM} \leq 19.1V$	25°C	105	115		105	115	dB	
		●	100	115		100	115	dB	
		125°C	82	100		95	110	dB	
Power Supply Rejection Ratio	$\pm 0.75V \leq V_S \leq \pm 20V$	25°C	96	110		96	110	dB	
		●	95	105		95	105	dB	
		125°C	82			86	100	dB	

ELECTRICAL CHARACTERISTICS The ● denotes specifications which apply over the operating temperature range of -55°C to 85°C for M grade parts, -40°C to 85°C for I grade parts and 0°C to 70°C for C grade parts.

PARAMETER	CONDITIONS		LT1017			LT1018			UNITS	
			MIN	TYP	MAX	MIN	TYP	MAX		
Gain	No Load, $V_{OUT} = \pm 19.9V$ (Note 3)	25°C	110	115		110	125		dB	
		● 125°C	105	115		105	120		dB	
	$R_L = 4k$, $V_{OUT} = \pm 19V$	25°C	100	110		100	110		dB	
		● 125°C	94			94			dB	
Output Sink Current	$V^+ = 4.5V$, $V^- = 0V$ Overdrive > 30mV	25°C	30	65		35	70		mA	
		● 125°C	25	50		25	50		mA	
Output Source Current	$V^+ = 40V$, $V^- = 0V$ $V_{IN} = 5mV$, $V_{OUT} = 0.4V$	25°C	30	75		75	250		μA	
		● 125°C	25	70		50	220		μA	
	$V^+ = 1.2V$, $V^- = 0V$ $V_{IN} = 5mV$, $V_{OUT} = 0.4V$	25°C	25	35		70	140		μA	
		● 125°C	15	20		45	120		μA	
		25°C	25	40		40	110		μA	
		● 125°C	25	40		40	110		μA	
Negative Output Saturation	$I_{OUT} = 0mA$ = 0.1mA = 1mA = 10mA = 30mA	$V^+ = 4.5V$, $V^- = 0V$ $V_{IN} = -10mV$	25°C		5	20		5	15	mV
		25°C		35	60		35	60	mV	
		25°C		60	120		60	120	mV	
		25°C		120	200		120	250	mV	
		25°C		350	600		350	700	mV	
		25°C		350	600		350	700	mV	
	$I_{OUT} = 0mA$ = 0.1mA = 1mA = 10mA = 30mA	$V^+ = 4.5V$, $V^- = 0V$ $V_{IN} = -10mV$	● 25°C		5	20		8	20	mV
		● 25°C		40	75		35	70	mV	
		● 25°C		75	150		70	150	mV	
		● 25°C		150	300		150	300	mV	
		● 25°C		600	900		500	900	mV	
		● 25°C		600	900		500	900	mV	
$I_{OUT} = 0mA$ = 0.1mA = 1mA = 10mA = 30mA	$V^+ = 4.5V$, $V^- = 0V$ $V_{IN} = -10mV$	125°C		25	50		10	40	mV	
	125°C		60	100		60	100	mV		
	125°C		100	200		110	200	mV		
	125°C		300	600		300	400	mV		
	125°C		300	600		300	400	mV		
	125°C		300	600		300	400	mV		
Positive Output Saturation	$I_{OUT} = 0\mu A$ = 10μA = 0μA = 10μA = 0μA = 10μA	25°C		40	80		35	80	mV	
		25°C		175	250		175	250	mV	
		● 25°C		45	90		45	90	mV	
		● 25°C		190	300		190	300	mV	
		● 125°C		50	100		50	100	mV	
		● 125°C		50	100		50	100	mV	
Leakage Current	$V_S = 5V$, $V_{OUT} = 40V$ $V_{IN} \geq 100mV$	25°C		0.5	3		1	8	μA	
		● 25°C		0.6	3		1.8	10	μA	
		● 125°C			5		15		μA	
Supply Current	$V_S = 5V$	25°C		30	60		110	250	μA	
		● 125°C		40	80		110	250	μA	
	$V_S = 40V$	25°C		40	90		130	250	μA	
		● 125°C		55	100		140	270	μA	
Minimum Operating Voltage	$I_{OUT} = 1mA$	25°C			1.15		1.2		V	
		● 25°C			1.15		1.2		V	
		● 125°C			1.15		1.2		V	


Note 1: Absolute Maximum Ratings are those values beyond which the life of the device may be impaired.

Note 2: Offset voltage is guaranteed over a common mode voltage range of $V^- \leq V_{IN} \leq (V^+ - 0.9V)$.

Note 3: No load gain is guaranteed but not tested (LT1017 only).


TYPICAL PERFORMANCE CHARACTERISTICS

Input Bias Current

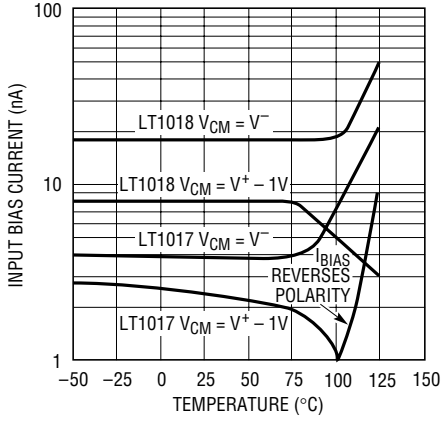


1017/18 G01

Input Offset Current

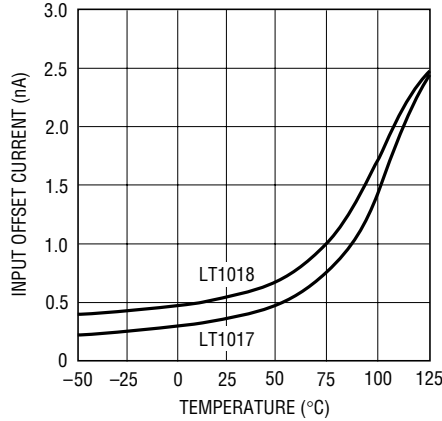


1017/18 G02

Bias Current vs Differential Input

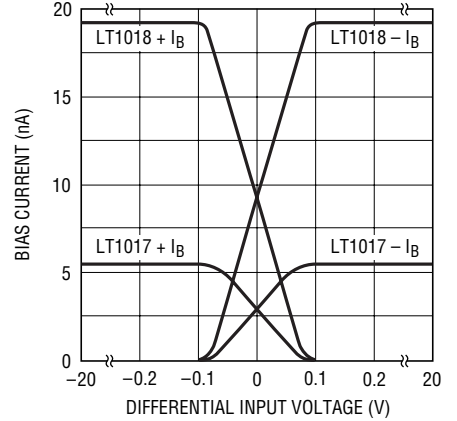


1017/18 G03

Input Bias Current with Inputs Driven Below the Supply

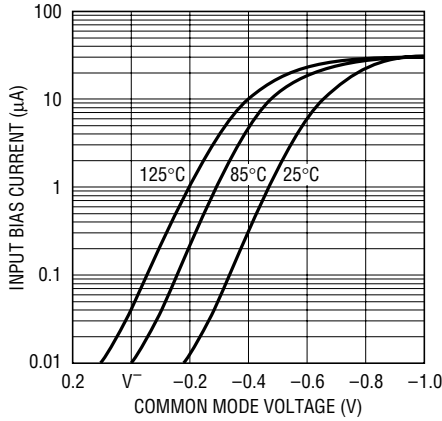


1017/18 G04

Common Mode Limits

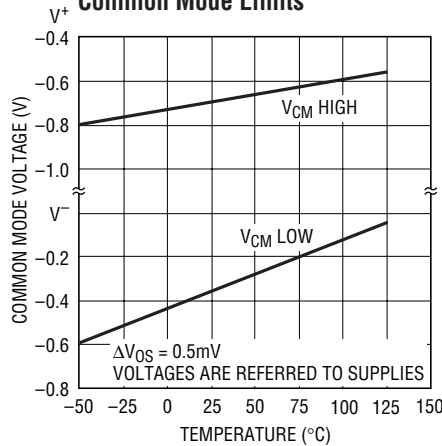


1017/18 G05

Supply Current

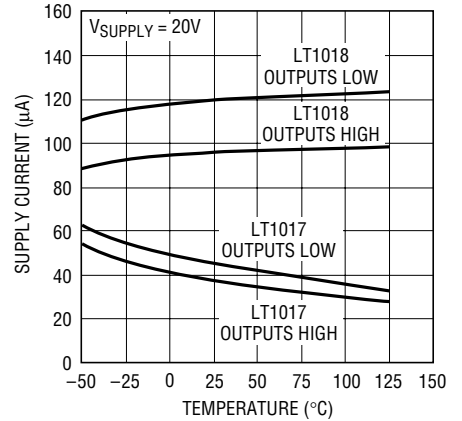


1017/18 G06

Positive Supply Current

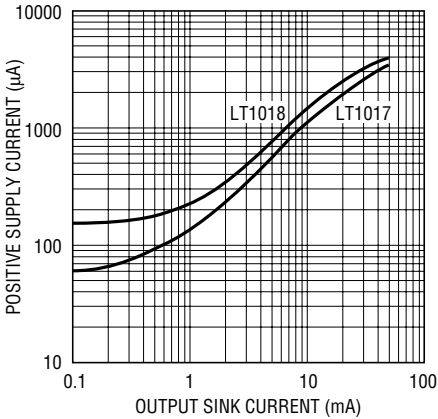


1017/18 G07

NPN Output Saturation Voltage

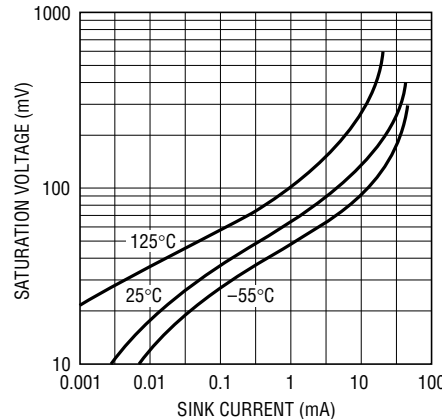

1017/18 G08


Output Sinking Current Limit

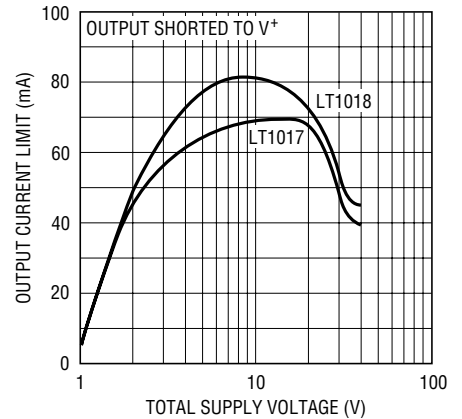


1017/18 G09

TYPICAL PERFORMANCE CHARACTERISTICS


Output Sinking Current Limit

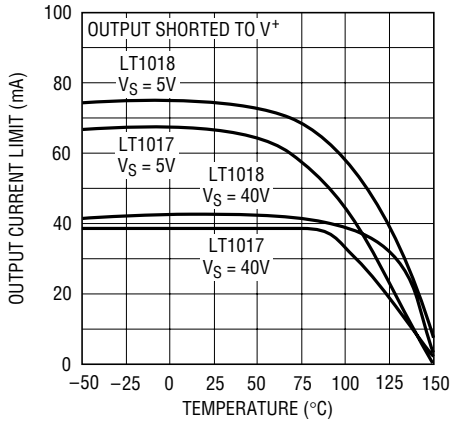


Total Switching Time

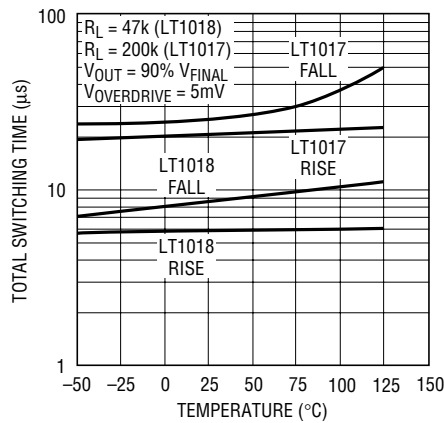


Output Delay

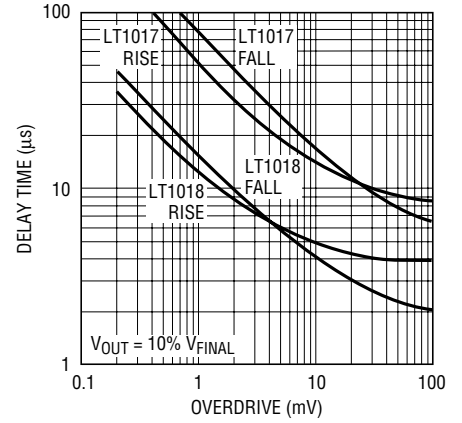


Transition Time

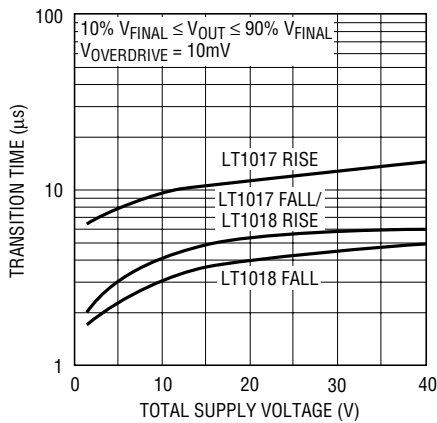


Positive Transition Time

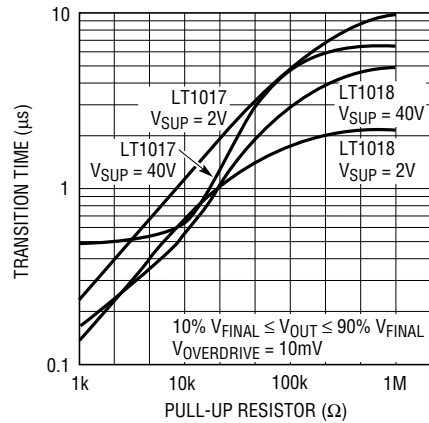


LT1017 Response Time

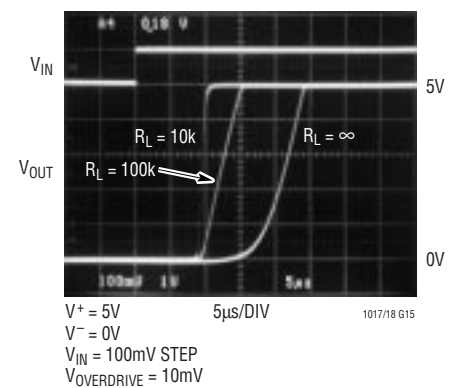


LT1017 Response Time

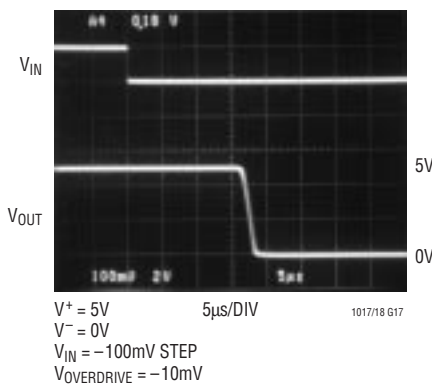

LT1018 Response Time

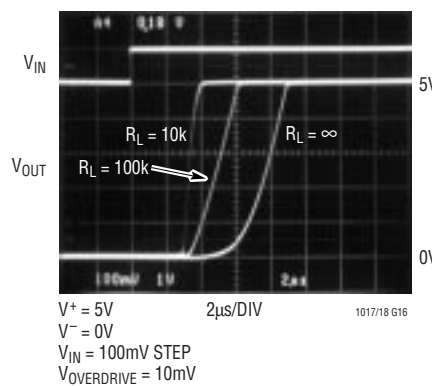


LT1018 Response Time

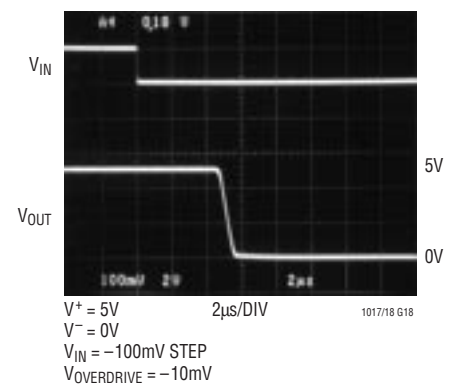


TYPICAL APPLICATIONS

Driving Relays




1017/18 TA03

Increasing Positive Output Current

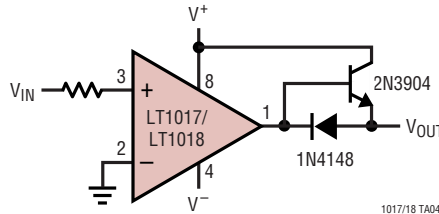


1017/18 TA04

Delay On Power Up




1017/18 TA05

LT1018 Op Amp, $A_V = 100$

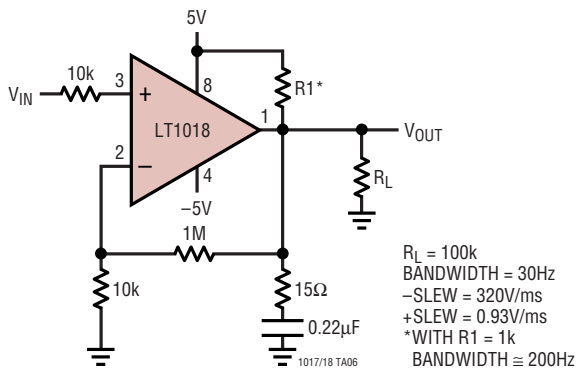


1017/18 TA06

LT1017 Op Amp, $A_V = 100$

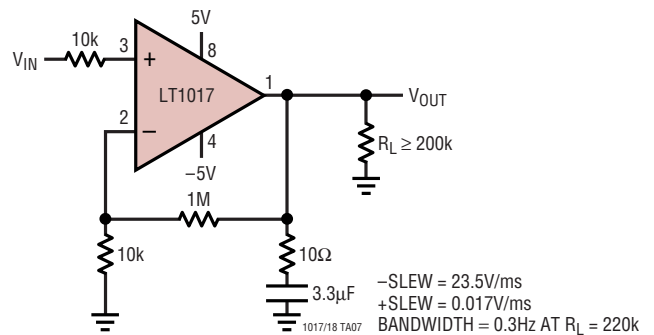


1017/18 TA07

Negative Voltage Regulator

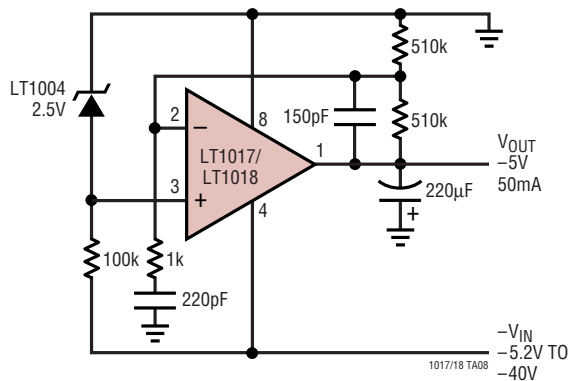

1017/18 TA08


2-Wire Comparator

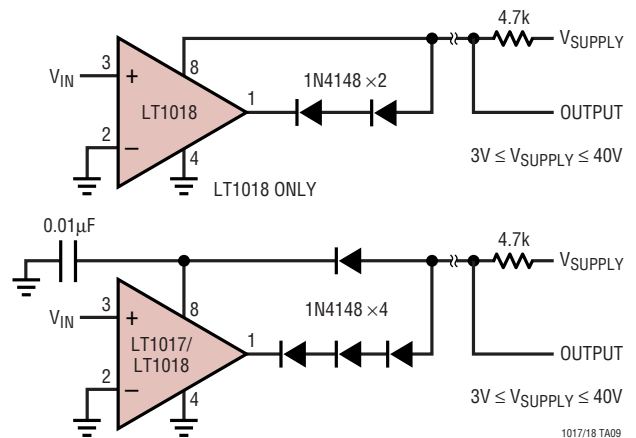


1017/18 TA09

TYPICAL APPLICATIONS

5V Power Supply Monitor

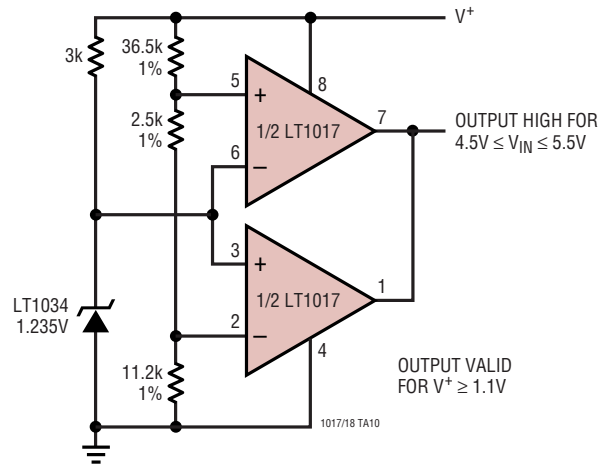


Precise Tri-Wave Generator

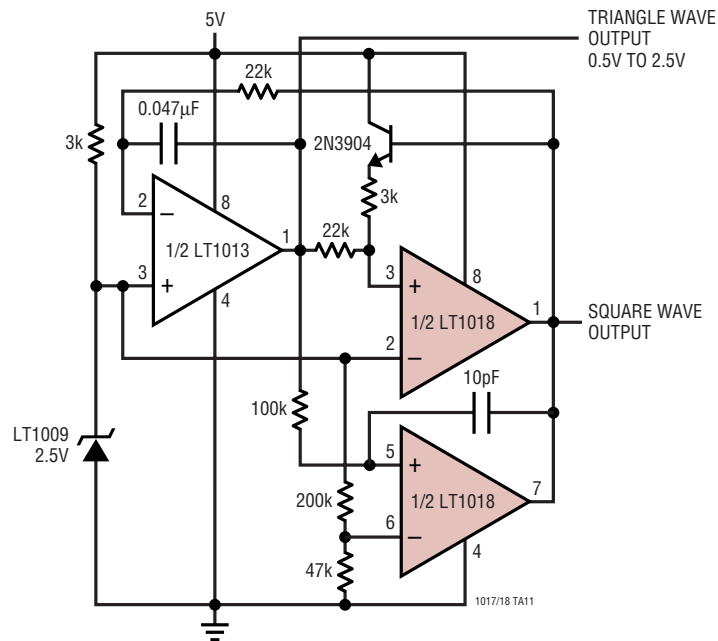


TYPICAL APPLICATIONS

Power Supply Monitor

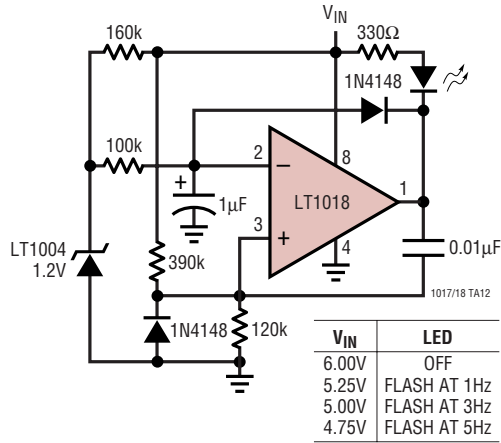


1.5V Input Flyback Regulator

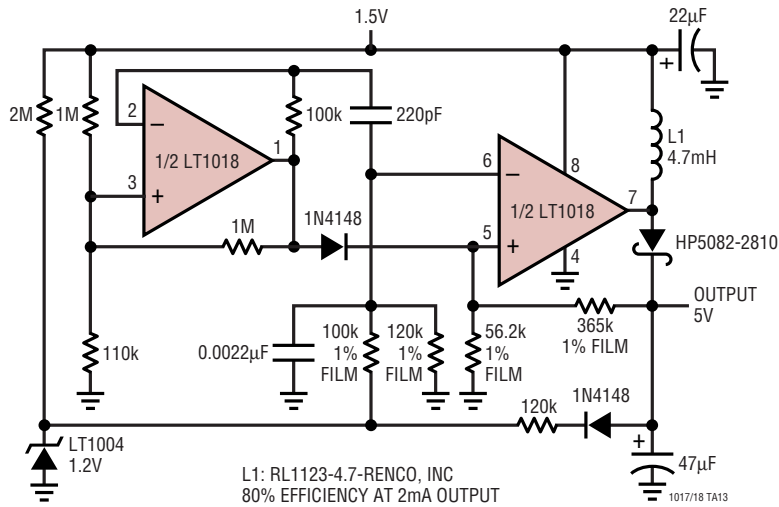


TYPICAL APPLICATIONS

Regulated Step-Up Converter

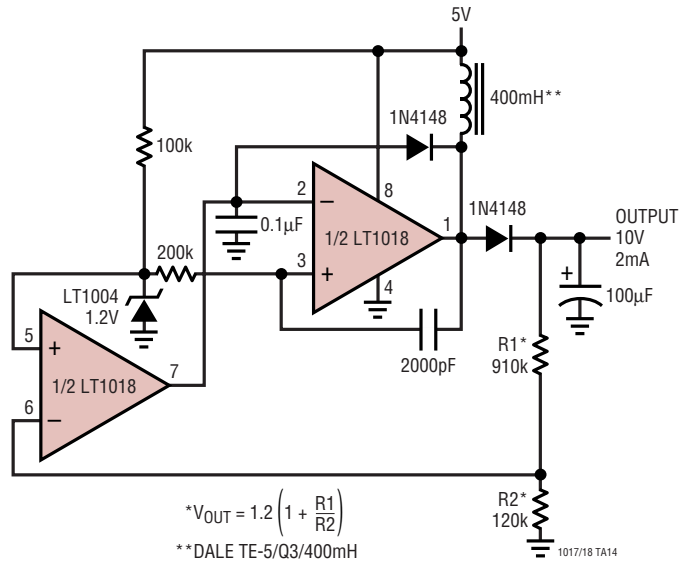


Low Power* V-to-F Converter

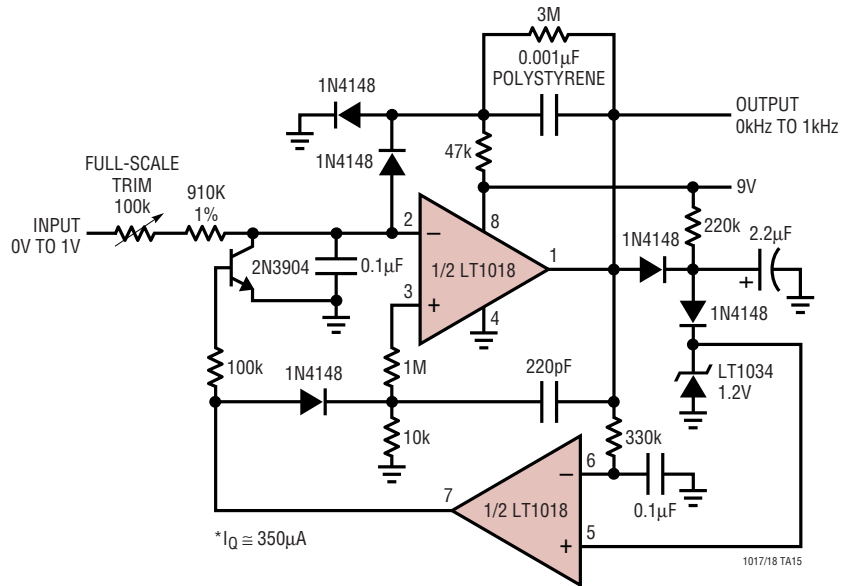

PACKAGE DESCRIPTION

H Package
8-Lead TO-5 Metal Can (.200 Inch PCD)
 (Reference LTC DWG # 05-08-1320)

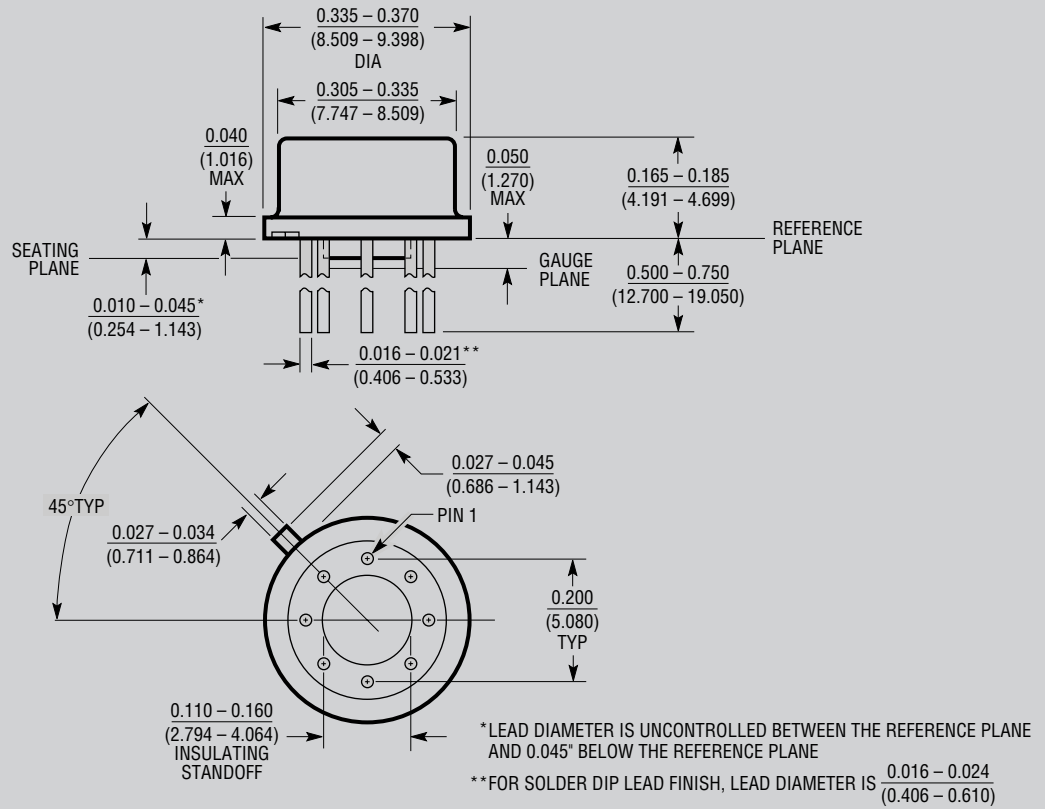


H8(TO-5) 0.200 PCD 1197

OBSOLETE


PACKAGE DESCRIPTION

N8 Package
8-Lead PDIP (Narrow .300 Inch)
 (Reference LTC DWG # 05-08-1510)

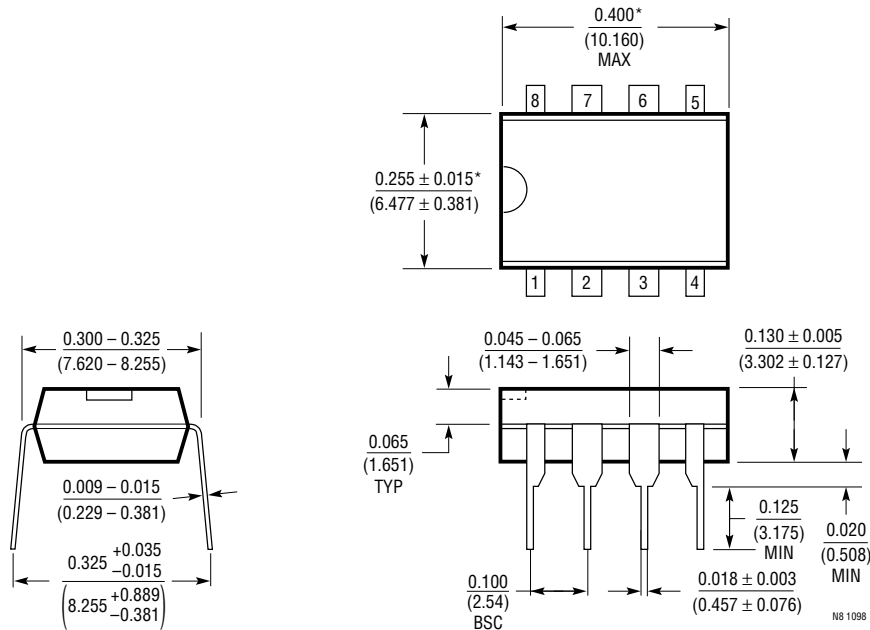

*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
 MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 INCH (0.254mm)

S8 Package
8-Lead Plastic Small Outline (Narrow .150 Inch)
 (Reference LTC DWG # 05-08-1610)

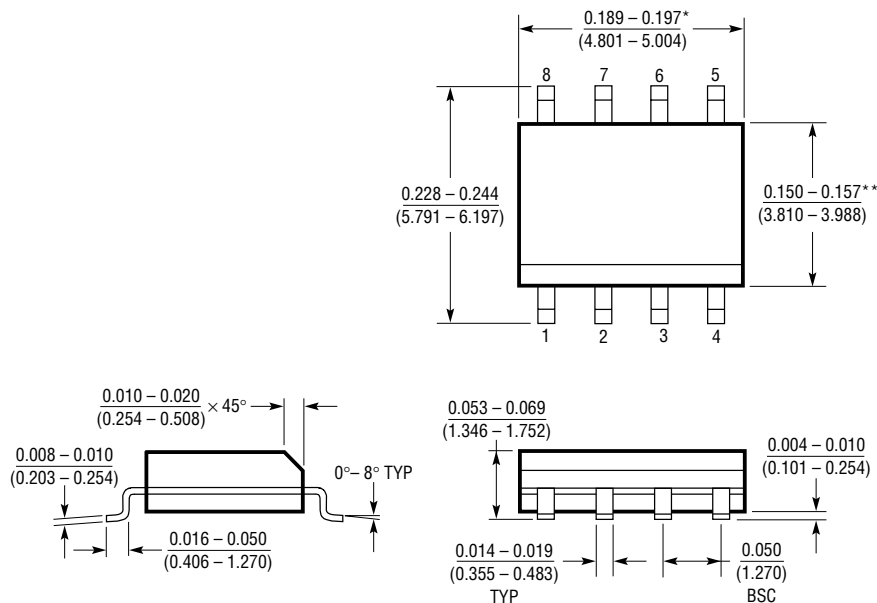


*DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE
 **DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

S08 1298

TYPICAL APPLICATION

Fully Isolated Limit Comparator

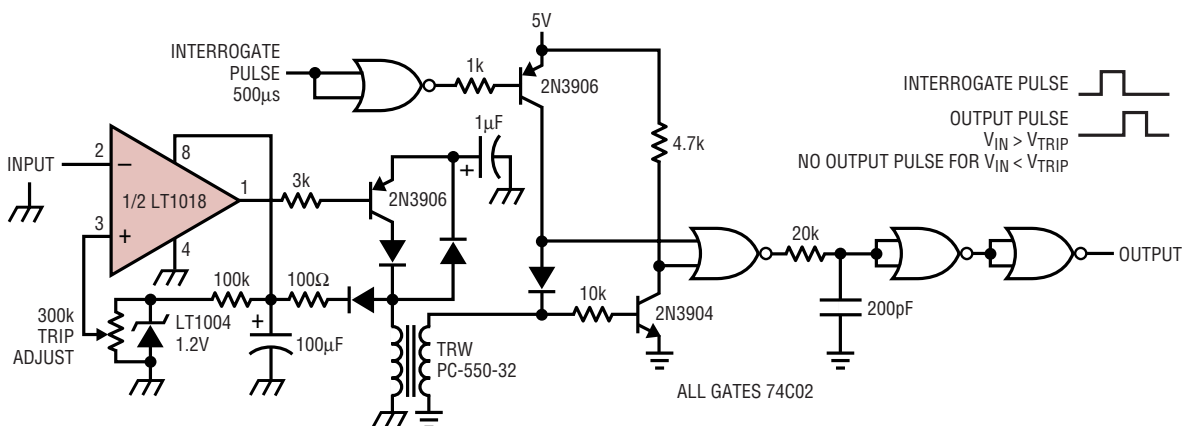

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1011/LT1011A	Voltage Comparators	Improved LT111A, 0.5mV $V_{OS(MAX)}$, 25nA $I_{B(MAX)}$, 3nA $I_{OS(MAX)}$, 250ns $t_{PD(MAX)}$
LT1020	Micropower Regulator and Comparator	40µA I_{SUPPLY} , 125mA I_{OUT} , 2.5V Reference Voltage
LTC1040	Dual Micropower Comparator	1.5µW (1Sample/Second), 0.5mV $V_{OS(MAX)}$, Rail-to-Rail Input
LT111A	Voltage Comparator	1mV $V_{OS(MAX)}$, 5µA $I_{OS(MAX)}$, 250ns $t_{PD(MAX)}$
LT1120/LT1120A	Micropower Regulator with Comparator and Shutdown	20µA I_{SUPPLY} , 125mA I_{OUT} , 2.5V Reference Voltage
LT119/LT319A	Dual Comparators	0.5mV $V_{OS(MAX)}$, 25mA I_{OUT} , 80ns t_{PD}
LT1671	Single Supply Ground Sensing Comparator	450µA I_{SUPPLY} , 60ns t_{PD} , 0.8mV V_{OS}