


NPN Silicon Darlington Transistors

**BCV 27
BCV47**

- For general AF applications
- High collector current
- High current gain
- Complementary types: BCV 26, BCV 46 (PNP)

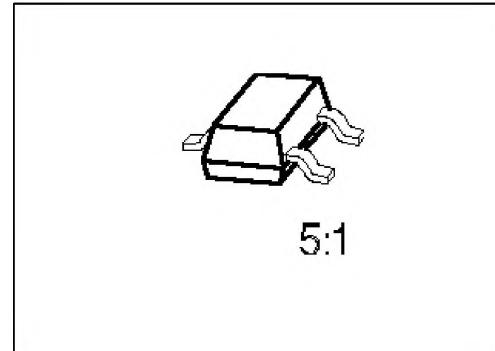

Type	Marking	Ordering Code (tape and reel)	Pin Configuration			Package ¹⁾
			1	2	3	
BCV 27	FFs	Q62702-C1474	B	E	C	SOT-23
BCV 47	FGs	Q62702-C1501				

Maximum Ratings

Parameter	Symbol	Values		Unit	
		BCV 27	BCV 47		
Collector-emitter voltage	V_{CEO}	30	60	V	
Collector-base voltage	V_{CBO}	40	80		
Emitter-base voltage	V_{EBO}	10	10		
Collector current	I_C	500			
Peak collector current	I_{CM}	800		mA	
Base current	I_B	100			
Peak base current	I_{BM}	200			
Total power dissipation, $T_S = 74^\circ\text{C}$	P_{tot}	360			
Junction temperature	T_j	150		$^\circ\text{C}$	
Storage temperature range	T_{stg}	– 65 ... + 150			

Thermal Resistance

Junction - ambient ²⁾	$R_{th JA}$	≤ 280	K/W
Junction - soldering point	$R_{th JS}$	≤ 210	

¹⁾ For detailed information see chapter Package Outlines.

²⁾ Package mounted on epoxy pcb 40 mm × 40 mm × 1.5 mm/6 cm² Cu.

Electrical Characteristicsat $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

DC characteristics


Collector-emitter breakdown voltage $I_C = 10 \text{ mA}$	$V_{(\text{BR})\text{CEO}}$				V
BCV 27		30	—	—	
BCV 47		60	—	—	
Collector-base breakdown voltage $I_C = 100 \mu\text{A}$	$V_{(\text{BR})\text{CB0}}$				
BCV 27		40	—	—	
BCV 47		80	—	—	
Emitter-base breakdown voltage, $I_E = 10 \mu\text{A}$	$V_{(\text{BR})\text{EB0}}$	10	—	—	
Collector cutoff current $V_{\text{CE}} = 30 \text{ V}$	I_{CBO}				
BCV 27		—	—	100	nA
$V_{\text{CE}} = 60 \text{ V}$	BCV 47	—	—	100	nA
$V_{\text{CE}} = 30 \text{ V}, T_A = 150^\circ\text{C}$	BCV 27	—	—	10	μA
$V_{\text{CE}} = 60 \text{ V}, T_A = 150^\circ\text{C}$	BCV 47	—	—	10	μA
Emitter cutoff current, $V_{\text{EB}} = 4 \text{ V}$	I_{EBO}	—	—	100	nA
DC current gain ¹⁾	h_{FE}				—
$I_C = 100 \mu\text{A}, V_{\text{CE}} = 1 \text{ V}$	BCV 27	4000	—	—	
	BCV 47	2000	—	—	
$I_C = 10 \text{ mA}, V_{\text{CE}} = 5 \text{ V}$	BCV 27	10000	—	—	
	BCV 47	4000	—	—	
$I_C = 100 \text{ mA}, V_{\text{CE}} = 5 \text{ V}$	BCV 27	20000	—	—	
	BCV 47	10000	—	—	
$I_C = 0.5 \text{ A}, V_{\text{CE}} = 5 \text{ V}$	BCV 27	4000	—	—	
	BCV 47	2000	—	—	
Collector-emitter saturation voltage ¹⁾ $I_C = 100 \text{ mA}, I_B = 0.1 \text{ mA}$	V_{CESat}	—	—	1	V
Base-emitter saturation voltage ¹⁾ $I_C = 100 \text{ mA}, I_B = 0.1 \text{ mA}$	V_{BESat}	—	—	1.5	

AC characteristics


Transition frequency $I_C = 50 \text{ mA}, V_{\text{CE}} = 5 \text{ V}, f = 20 \text{ MHz}$	f	—	170	—	MHz
Output capacitance $V_{\text{CB}} = 10 \text{ V}, f = 1 \text{ MHz}$	C_{obo}	—	3.5	—	pF

¹⁾ Pulse test: $t \leq 300 \mu\text{s}$, $D = 2\%$.


Total power dissipation $P_{\text{tot}} = f(T_A^*; T_S)$
 * Package mounted on epoxy

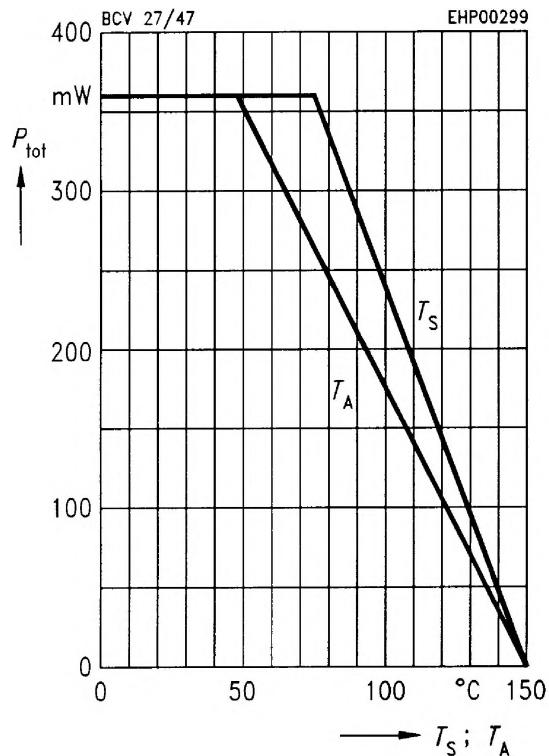


Collector-base capacitance $C_{\text{CBO}} = f(V_{\text{CBO}})$
Emitter-base capacitance $C_{\text{EBO}} = f(V_{\text{EBO}})$

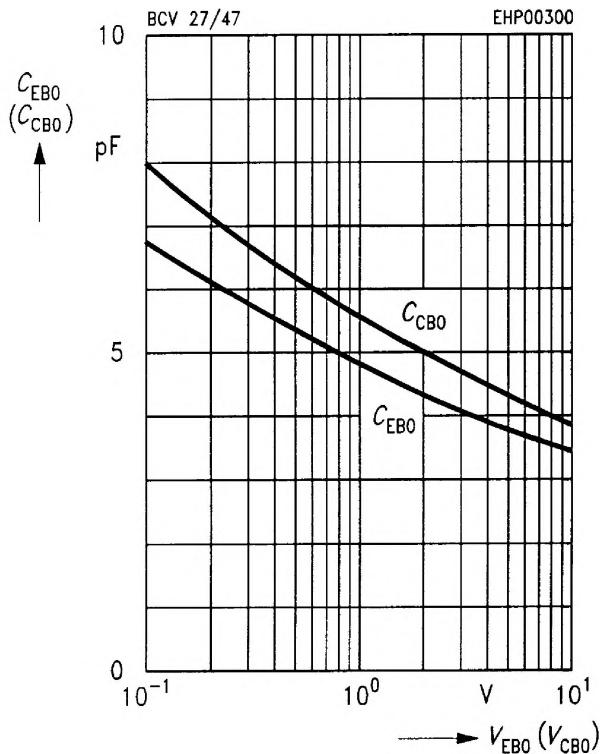

Permissible pulse load $P_{\text{tot max}}/P_{\text{tot DC}} = f(t_p)$

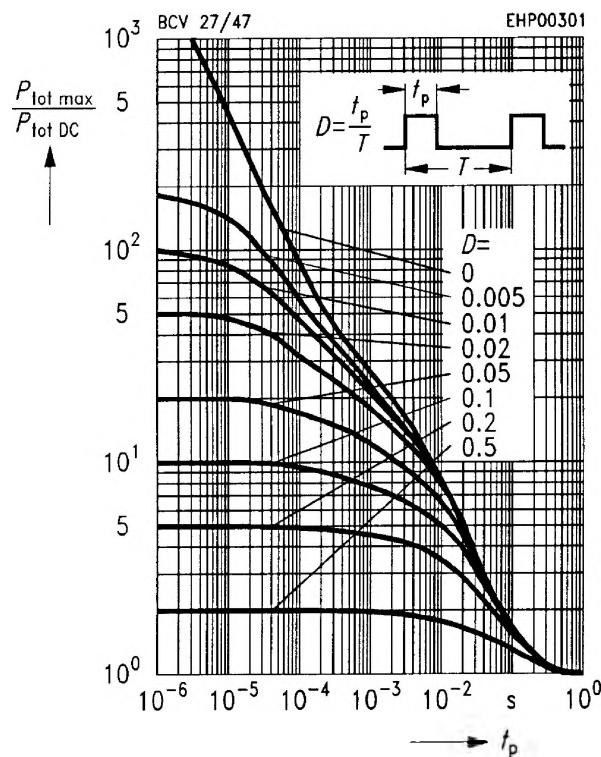


Transition frequency $f_T = f(I_C)$
 $V_{\text{CE}} = 5 \text{ V}$

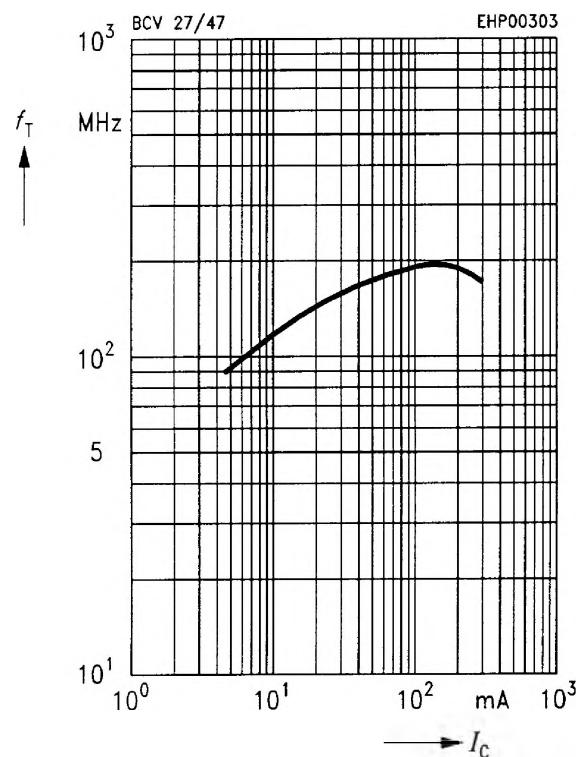

Base-emitter saturation voltage


$$I_C = f(V_{BEsat})$$

$$h_{FE} = 1000$$

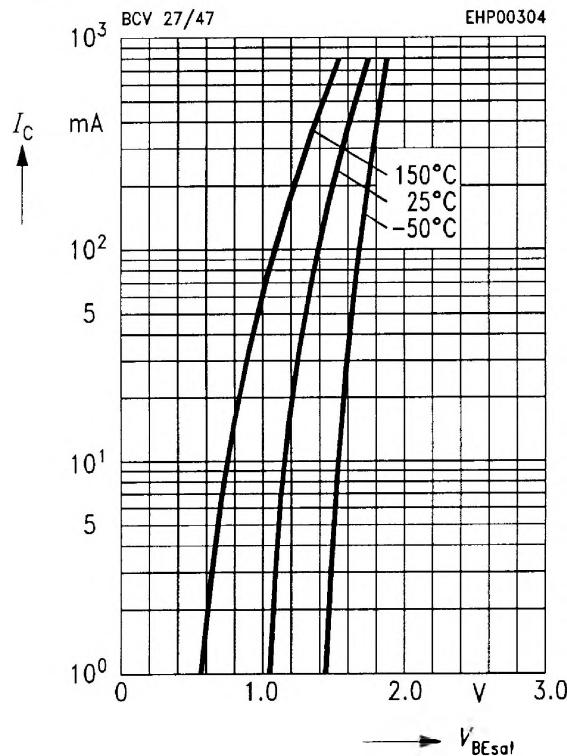
**Collector-emitter saturation voltage**

$$I_C = f(V_{CEsat})$$

$$h_{FE} = 1000$$

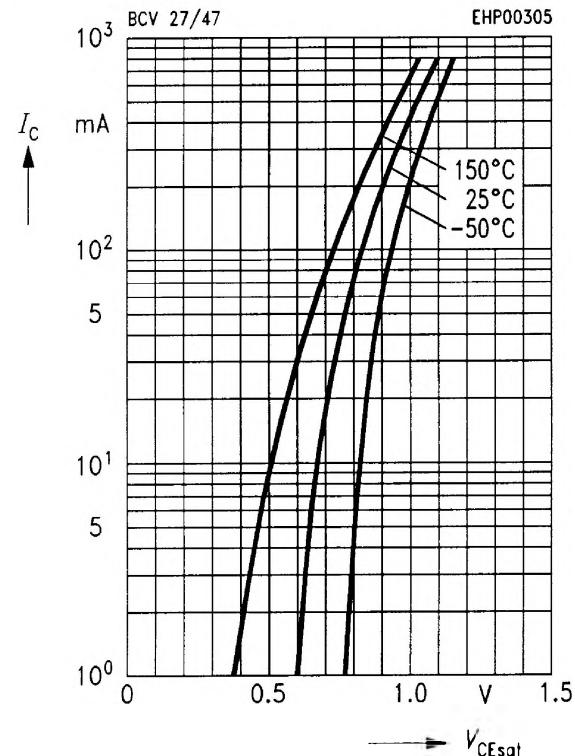**Collector cutoff current $I_{CBO} = f(T_A)$**

$$V_{CB} = V_{CE \max}$$

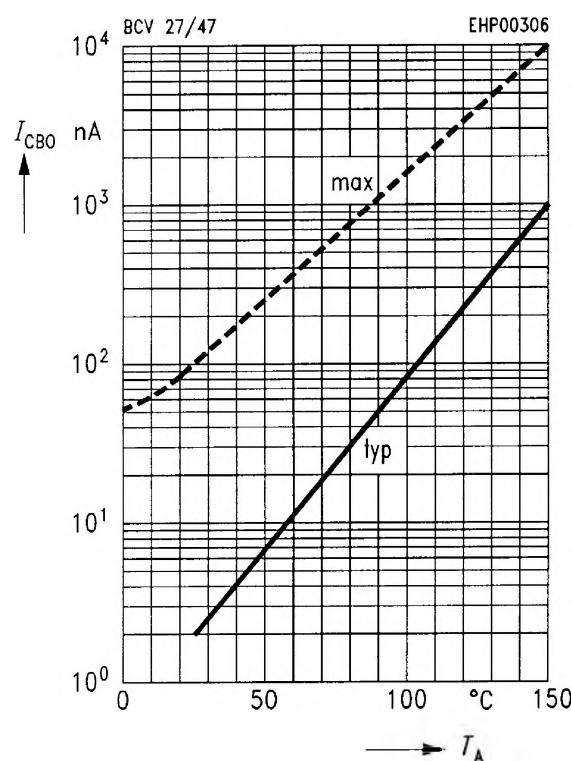**DC current gain $h_{FE} = f(I_c)$**

$$V_{CE} = 5 \text{ V}$$

