


LOW NOISE AUDIO AMPLIFIERS

DESCRIPTION

The BCY78 and BCY79 are silicon planar epitaxial PNP transistors in Jedec TO-18 metal case. They are designed for use in audio driver and low-noise input stages.

The complementary NPN types are respectively the BCY58 and BCY59.

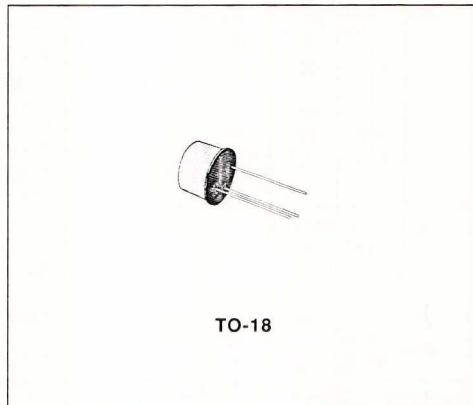

INTERNAL SCHEMATIC DIAGRAM



ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value		Unit
		BCY78	BCY79	
V_{CES}	Collector-emitter Voltage ($V_{BE} = 0$)	- 32	- 45	V
V_{CEO}	Collector-emitter Voltage ($I_B = 0$)	- 32	- 45	V
V_{EBO}	Emitter-base Voltage ($I_C = 0$)	-	- 5	V
I_C	Collector Current	-	- 200	mA
I_B	Base Current	-	- 20	mA
P_{tot}	Total Power Dissipation at $T_{amb} \leq 25^\circ\text{C}$ at $T_{case} \leq 45^\circ\text{C}$	390 1	mW W	
T_{stg}, T_j	Storage and Junction Temperature	- 65 to 200		$^\circ\text{C}$

THERMAL DATA

$R_{th\ j-case}$	Thermal Resistance Junction-case	Max	150	$^{\circ}C/W$
$R_{th\ j-amb}$	Thermal Resistance Junction-ambient	Max	450	$^{\circ}C/W$

ELECTRICAL CHARACTERISTICS ($T_{amb} = 25^{\circ}C$ unless otherwise specified)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
I_{CES}	Collector Cutoff Current ($V_{BE} = 0$)	For BCY78 $V_{CE} = -25 V$ $V_{CE} = -32 V$ $V_{CE} = -25 V$	$T_{amb} = 150^{\circ}C$	-2	-20 -100 -10	nA nA μA	
		For BCY79 $V_{CE} = -35 V$ $V_{CE} = -45 V$ $V_{CE} = -35 V$	$T_{amb} = 150^{\circ}C$	-2	-20 -100 -10	nA nA μA	
I_{CEX}	Collector Cutoff Current ($V_{BE} = 0.2 V$)	For BCY78 $V_{CE} = -32 V$ For BCY79 $V_{CE} = -45 V$	$T_{amb} = 100^{\circ}C$		-20	μA	
			$T_{amb} = 100^{\circ}C$		-20	μA	
I_{EB0}	Emitter Cutoff Current ($I_C = 0$)	$V_{EB} = -4 V$			-20	nA	
$V_{(BR)CES}$	Collector-emitter Breakdown Voltage ($V_{BE} = 0$)	$I_C = -10 \mu A$	For BCY78 For BCY79	-32 -45			V V
$V_{(BR)CEO}^*$	Collector-emitter Breakdown Voltage ($I_B = 0$)	$I_C = -2 mA$	For BCY78 For BCY79	-32 -45			V V
$V_{(BR)EBO}$	Emitter-base Breakdown Voltage ($I_C = 0$)	$I_E = -1 \mu A$		-5			V
$V_{CE(sat)}^*$	Collector-emitter Saturation Voltage	$I_C = -10 mA$ $I_C = -100 mA$	$I_B = -0.25 mA$ $I_B = -2.5 mA$	-0.12 -0.4	-0.25 -0.8	V V	
V_{BE}^*	Base-emitter Voltage	$I_C = -10 \mu A$ $I_C = -2 mA$ $I_C = -10 mA$ $I_C = -100 mA$	$V_{CE} = -5 V$ $V_{CE} = -5 V$ $V_{CE} = -1 V$ $V_{CE} = -1 V$	-0.6	-0.55 -0.65 -0.68 -0.75	-0.75	V V V V
$V_{BE(sat)}^*$	Base-emitter Saturation Voltage	$I_C = -10 mA$ $I_C = -100 mA$	$I_B = -0.25 mA$ $I_B = -2.5 mA$	-0.6 -0.7	-0.7 -0.85	-0.85 -1.2	V V

* Pulsed : pulse duration = 300 μs , duty cycle = 1 %.

ELECTRICAL CHARACTERISTICS (continued)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
h_{FE}^*	DC Current Gain	$I_C = -10 \mu A$	$V_{CE} = -5 V$ Gr.VII Gr.VIII Gr.IX		140 30 40	200 270	
		$I_C = -2 mA$	$V_{CE} = -5 V$ Gr.VII Gr.VIII Gr.IX		120 180 250	170 250 350	220 310 460
		$I_C = -10 mA$	$V_{CE} = -1 V$ Gr.VII Gr.VIII Gr.IX		80 120 160	180 260 360	400 630
		$I_C = -100 mA$	$V_{CE} = -1 V$ Gr.VII Gr.VIII Gr.IX		40 45 60		
	For BCY78 Only		Gr.X				
		$I_C = -0.01 mA$	$V_{CE} = -5 V$	100	340		
		$I_C = -2 mA$	$V_{CE} = -5 V$	380	500	630	
		$I_C = -10 mA$	$V_{CE} = -1 V$	240	500	1000	
		$I_C = -100 mA$	$V_{CE} = -1 V$	60			
h_{fe}	Small Signal Current Gain	$I_C = -2 mA$	$V_{CE} = -5 V$				
		$f = 1 kHz$	Gr.VII Gr.VIII Gr.IX	125 175 250	200 260 330	250 350 500	
	for BCY78 Only		Gr.X	350	520	700	
f_T	Transition Frequency	$I_C = -10 mA$	$V_{CE} = -5 V$		180		MHz
		$f = 100 MHz$					
C_{EB0}	Emitter-base Capacitance	$I_C = 0$	$V_{EB} = -0.5 V$		11	15	pF
		$f = 1 MHz$					
C_{CB0}	Collector-base Capacitance	$I_E = 0$	$V_{CB} = -10 V$		4.5	7	pF
		$f = 1 MHz$					
NF	Noise Figure	$I_C = -0.2 mA$	$V_{CE} = -5 V$		2	6	dB
		$R_g = 2 k\Omega$					
h_{ie}	Input Impedance	$I_C = -2 mA$	$V_{CE} = -5 V$				
		$f = 1 kHz$	Gr.VII Gr.VIII Gr.IX		2.7 3.6 4.5		kΩ
	for BCY78 Only		Gr.X		7.5		kΩ
h_{re}	Reverse Voltage Ratio	$I_C = -2 mA$	$V_{CE} = -5 V$				
		$f = 1 kHz$	Gr.VII Gr.VIII Gr.IX		1.5×10^{-4} 2×10^{-4} 2×10^{-4}		
	for BCY78 Only		Gr.X		3×10^{-4}		


* Pulsed : pulse duration = 300 μs, duty cycle = 1 %.

ELECTRICAL CHARACTERISTICS (continued)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
h_{oe}	Output Admittance	$I_C = -2 \text{ mA}$ $f = 1 \text{ kHz}$ Gr.VII Gr.VIII Gr.IX For BCY78 Only Gr.X		18 24 30 50	30 50 60 100	μS μS μS μS
t_d	Delay Time	$I_C = -10 \text{ mA}$ $I_{B1} = -1 \text{ mA}$ $I_C = -100 \text{ mA}$ $I_{B1} = -10 \text{ mA}$		35 5		ns ns
t_r	Rise Time	$I_C = -10 \text{ mA}$ $I_{B1} = -1 \text{ mA}$ $I_C = -100 \text{ mA}$ $I_{B1} = -10 \text{ mA}$		50 50		ns ns
t_s	Storage Time	$I_C = -10 \text{ mA}$ $I_{B1} = -I_{B2} = -1 \text{ mA}$ $I_C = -100 \text{ mA}$ $I_{B1} = -I_{B2} = -10 \text{ mA}$		400 250		ns ns
t_f	Fall Time	$I_C = -10 \text{ mA}$ $I_{B1} = -I_{B2} = -1 \text{ mA}$ $I_C = -100 \text{ mA}$ $I_{B1} = -I_{B2} = -10 \text{ mA}$		80 200		ns ns
t_{on}	Turn-on Time	$I_C = -10 \text{ mA}$ $I_{B1} = -1 \text{ mA}$ $I_C = -100 \text{ mA}$ $I_{B1} = -10 \text{ mA}$		85 55	150 150	ns ns
t_{off}	Turn-off Time	$I_C = -10 \text{ mA}$ $I_{B1} = -I_{B2} = -1 \text{ mA}$ $I_C = -100 \text{ mA}$ $I_{B1} = -I_{B2} = -10 \text{ mA}$		480 450	800 800	ns ns

* Pulsed : pulse duration = 300 μs , duty cycle = 1 %.


Collector-emitter Saturation Voltage.

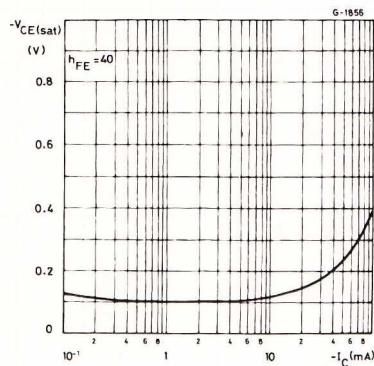


Base-emitter Saturation Voltage.

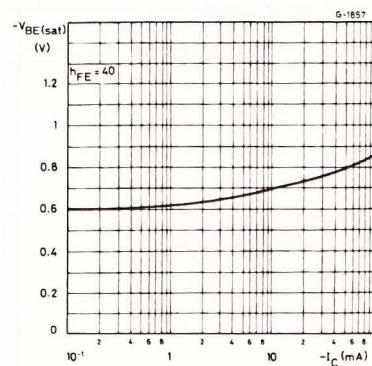


DC Current Gain.

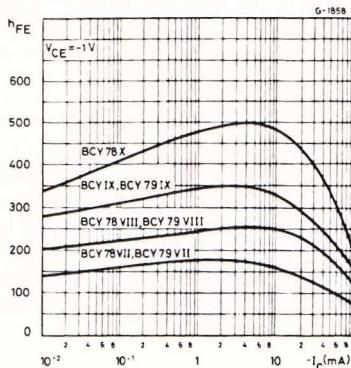

Normalized h Parameters.

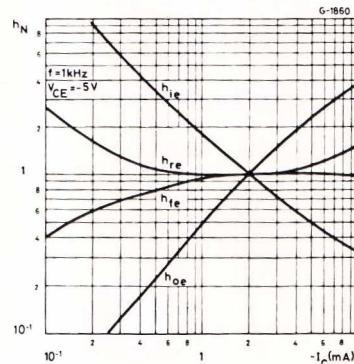

Noise Figure vs. Frequency.

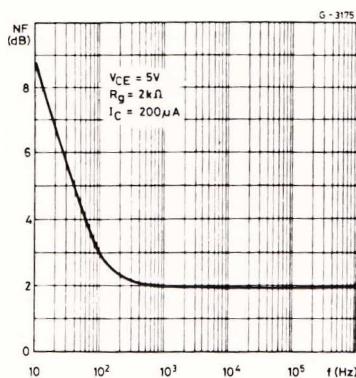Noise Figure ($f = 1$ kHz).