

AlGaAs laser diodes


RLD-78PP/RLD-78NP

The RLD-78PP and RLD-78NP are the world's first mass-produced laser diodes those are manufactured by molecular beam epitaxy. The characteristics of these laser diodes are suitable for laser beam printers.

●Applications
Laser beam printers

- Features
- 1) One-third dispersion compared with conventional laser diodes.
 - 2) High-precision, compact package.
 - 3) Low droop.
 - 4) Can be driven by single power supply.

●External dimensions (Unit: mm)

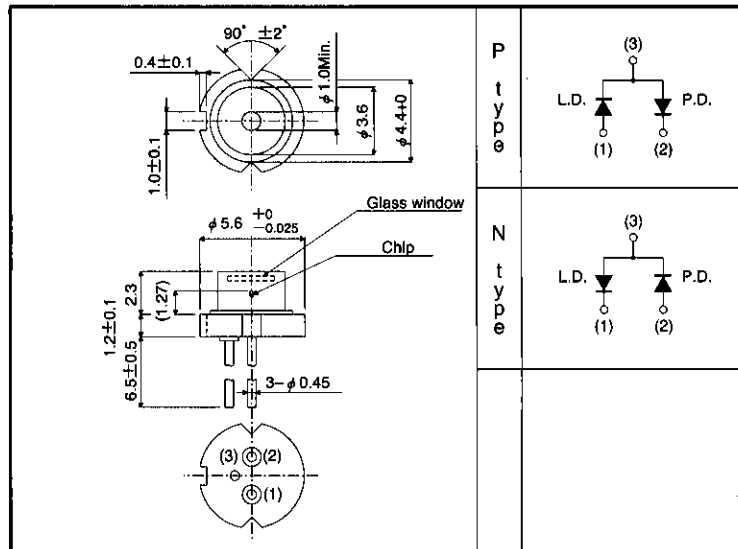

●Absolute maximum ratings (Tc = 25°C)

Parameter	Symbol	Limits	Unit	
Output	Po	5	mW	
Reverse voltage	Laser	V _R	2	V
	PIN photodiode	V _{R(PIN)}	30	V
Operating temperature	T _{opr}	-10~+60	°C	
Storage temperature	T _{stg}	-40~+85	°C	

●Electrical and optical characteristics (Tc = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Threshold current	I_{th}	15	25	45	mA	—
Operating current	I_{op}	25	45	65	mA	$P_o=3mW$
Operating voltage	V_{op}	—	1.9	2.3	V	$P_o=3mW$
Differential efficiency	η	0.1	0.2	0.3	mW/mA	$\frac{2mW}{I(3mW)-I(1mW)}$
Monitor current	I_m	0.3	0.55	0.9	mA	$P_o=3mW$
Parallel divergence angle	$\theta_{//}^*$	8	11	15	deg	$P_o=3mW$
Perpendicular divergence angle	θ_{\perp}^*	25	30	38	deg	
Parallel deviation angle	$\Delta\phi_{//}$	—	—	± 2	deg	
Perpendicular deviation angle	$\Delta\phi_{\perp}$	—	—	± 3	deg	
Emission point accuracy	$\begin{matrix} \Delta X \\ \Delta Y \\ \Delta Z \end{matrix}$	—	—	± 80	μm	—
Peak emission wavelength	λ	770	785	795	nm	$P_o=3mW$
Droop	ΔP	—	5	10	%	$P_o=3mW$

* $\theta_{//}$ and θ_{\perp} are defined as the angle within which the intensity is 50% or more of the peak value.

●Electrical and optical curves

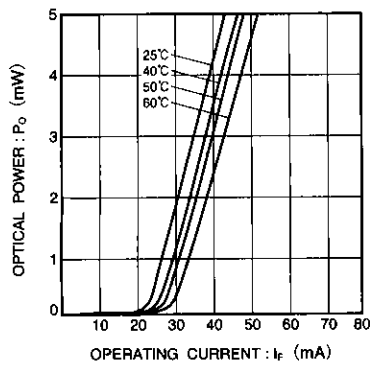


Fig. 1 Optical output vs. operating current

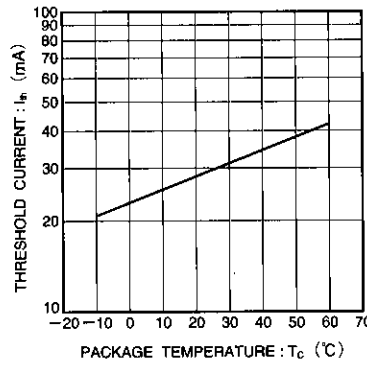


Fig. 2 Dependence of threshold current on temperature

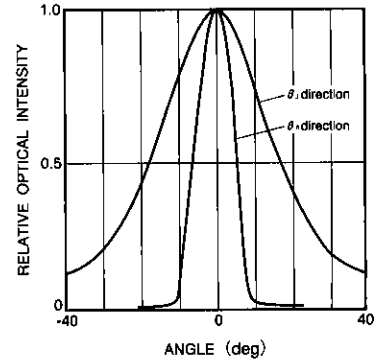


Fig. 3 Far field pattern

For Laser Beam Printers

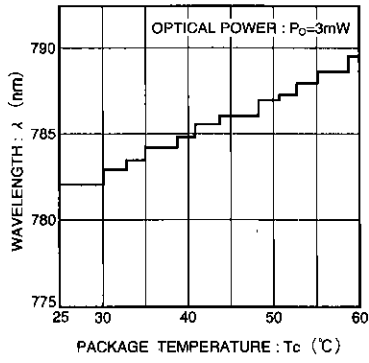


Fig. 4 Dependence of wavelength on temperature

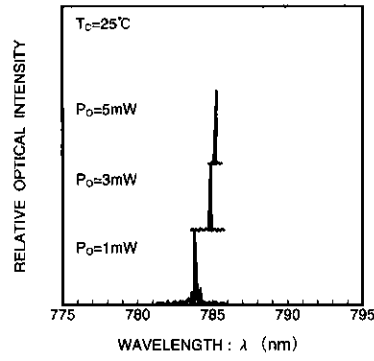


Fig. 5 Dependence of emission spectrum on optical output

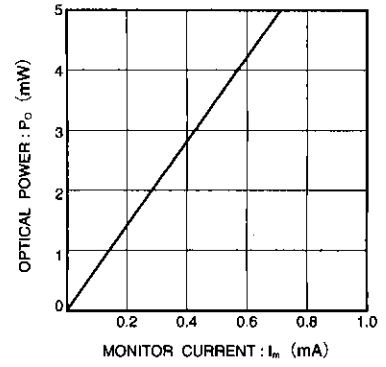


Fig. 6 Monitor current vs. optical output

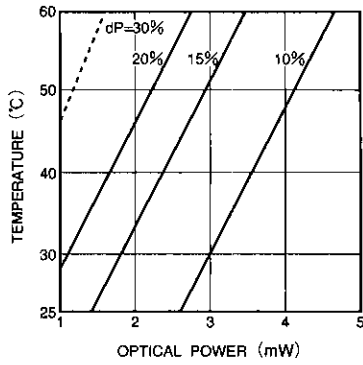


Fig. 7 Temperature vs. output guidelines for various droop percentages

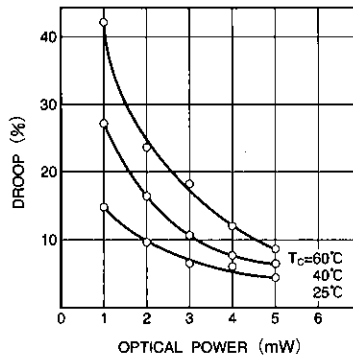


Fig. 8 Dependence of droop on output and temperature

Notes

- The contents described in this catalogue are correct as of March 1997.
- No unauthorized transmission or reproduction of this book, either in whole or in part, is permitted.
- The contents of this book are subject to change without notice. Always verify before use that the contents are the latest specifications. If, by any chance, a defect should arise in the equipment as a result of use without verification of the specifications, ROHM CO., LTD., can bear no responsibility whatsoever.
- Application circuit diagrams and circuit constants contained in this data book are shown as examples of standard use and operation. When designing for mass production, please pay careful attention to peripheral conditions.
- Any and all data, including, but not limited to application circuit diagrams, information, and various data, described in this catalogue are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO., LTD., disclaims any warranty that any use of such device shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes absolutely no liability in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices; other than for the buyer's right to use such devices itself, resell or otherwise dispose of the same; no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by ROHM CO., LTD., is granted to any such buyer.

The products listed in this catalogue are designed to be used with ordinary electronic equipment or devices (such as audio-visual equipment, office-automation equipment, communications devices, electrical appliances, and electronic toys). Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers, or other safety devices) please be sure to consult with our sales representatives in advance.

- Notes when exporting

It is essential to obtain export permission when exporting any of the above products when it falls under the category of strategic material (or labor) as determined by foreign exchange or foreign trade control laws. Please be sure to consult with our sales representatives to ascertain whether any product is classified as a strategic material.