

PC356NT/PC358

Mini-Flat Package, High Collector-emitter Voltage Type Photocoupler

■ Features

1. High collector-emitter voltage
(**PC358** $\cdots V_{\text{CEO}} : 120\text{V}$, **PC356NT** $\cdots V_{\text{CEO}} : 80\text{V}$)
2. Opaque type, mini-flat package
PC356NT/PC358 (1-channel)
3. Subminiature type
(The volume is smaller than that of our conventional DIP type by as far as 30%)
4. Isolation voltage between input and output
PC356NT/PC358 $\cdots V_{\text{iso}} : 3\ 750\text{V}_{\text{rms}}$
5. Recognized by UL (No. E64380)

■ Applications


1. Hybrid substrates that require high density mounting
2. Programmable controllers

■ Package Specifications

Model No.	Package specifications
PC356NT	Taping reel diameter 178mm (750pcs.)
PC358	Taping reel diameter 370mm (3000pcs.)

■ Outline Dimensions


(Unit : mm)

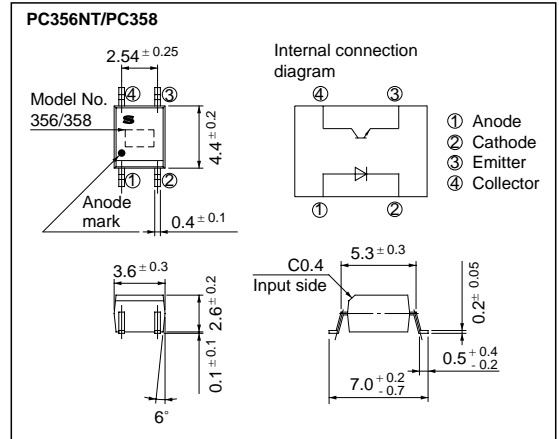

Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit	
Input	Forward current	I _F	50	mA	
	*1 Peak forward current	I _{FM}	1	A	
	Reverse voltage	V _R	6	V	
	Power dissipation	P	70	mW	
Output	Collector-emitter voltage	V _{CEO}	PC356NT	80	V
			PC358	120	V
	Emitter-collector voltage	V _{ECO}	6	V	
	Collector current	I _C	50	mA	
	Collector power dissipation	P _C	150	mW	
	Total power dissipation	P _{tot}	170	mW	
	*2 Isolation voltage	V _{iso}	3 750	V _{rms}	
Operating temperature	T _{opr}	- 30 to + 100	°C		
Storage temperature	T _{stg}	- 40 to + 125	°C		
*3 Soldering temperature	T _{sol}	260	°C		



*1 Pulse width ≤ 100μs, Duty ratio : 0.001

*2 40 to 60% RH, AC for 1 minute

*3 For 10 seconds

Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit		
Input	Forward voltage	V _F	I _F = 20mA	-	1.2	1.4	V		
	Reverse current	I _R	V _R = 4V	-	-	10	μA		
	Terminal capacitance	C _t	V = 0, f = 1kHz	-	30	250	pF		
Output	Collector dark current	I _{CEO}	PC356NT	V _{CE} = 20V, I _F = 0	-	-	1 × 10 ⁻⁷	A	
			PC358	V _{CE} = 40V, I _F = 0	-	-	-	-	
	Collector-emitter breakdown voltage	BV _{CEO}	I _C = 0.1mA, I _F = 0	PC356NT	80	-	-	V	
PC358				120	-	-	-		
Emitter-collector breakdown voltage	BV _{ECO}	I _E = 10 μA, I _F = 0	6	-	-	V			
Transfer-characteristics	Current transfer ratio	CTR	PC356NT	I _F = 1mA, V _{CE} = 5V	100	-	400	%	
			PC358	I _F = 5mA, V _{CE} = 5V	50	-	600	%	
	Collector-emitter saturation voltage	V _{CE(sat)}	I _F = 20mA, I _C = 1mA	-	-	0.2	V		
	Isolation resistance	R _{iso}	DC500V, 40 to 60% RH	5 × 10 ¹⁰	10 ¹¹	-	Ω		
	Floating capacitance	C _f	V = 0, f = 1MHz	-	0.6	1.0	pF		
	Response time	Rise time	t _r	V _{CE} = 2V, I _C = 2mA R _L = 100Ω	PC356NT	-	6	-	μs
					PC358	-	4	18	μs
Fall time		t _f	PC356NT		-	8	-	μs	
			PC358		-	3	18	μs	

Fig. 1 Forward Current vs. Ambient Temperature

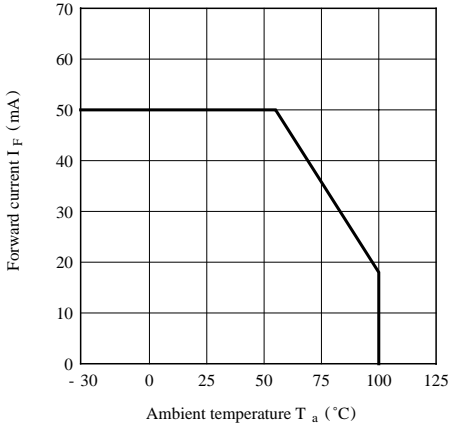


Fig. 2 Diode Power Dissipation vs. Ambient Temperature

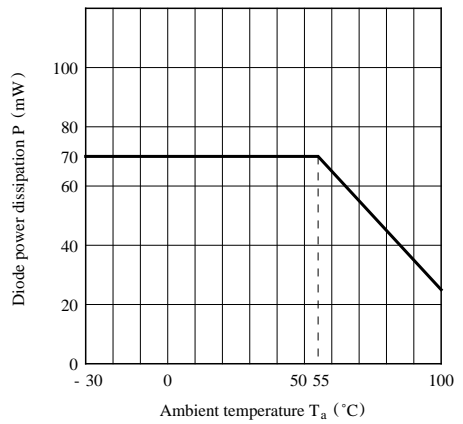


Fig. 3 Collector Power Dissipation vs. Ambient Temperature

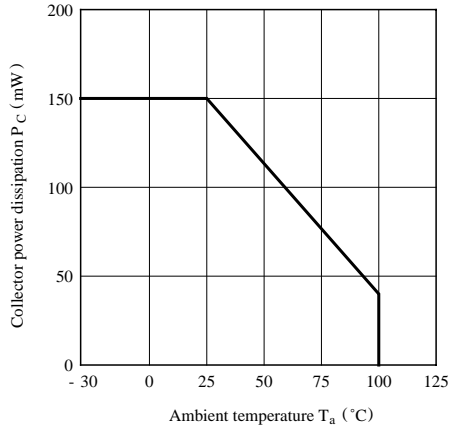


Fig. 4 Total Power Dissipation vs. Ambient Temperature

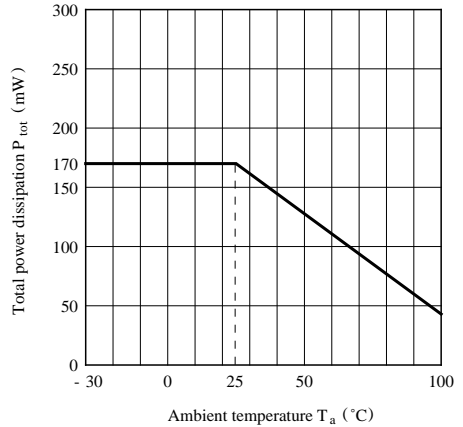


Fig. 5 Peak Forward Current vs. Duty Ratio

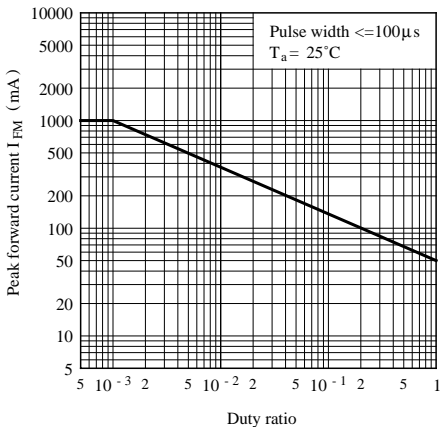


Fig. 6 Forward Current vs. Forward Voltage

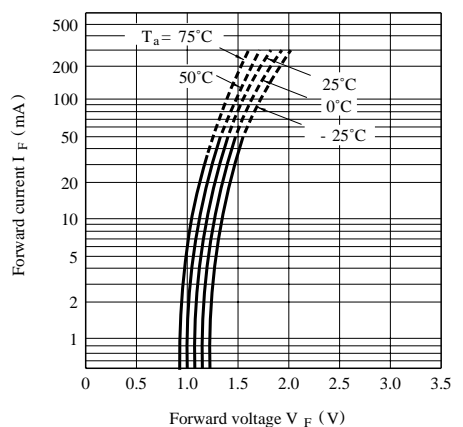


Fig. 7-a Current Transfer Ratio vs. Forward Current (PC356NT)

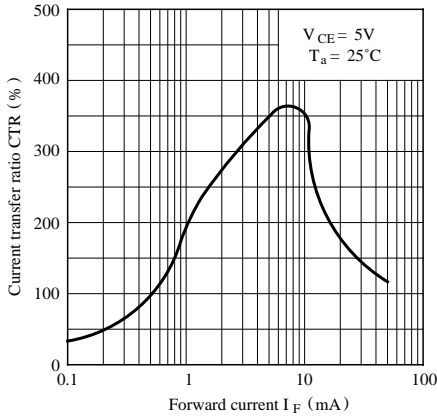


Fig. 7-b Current Transfer Ratio vs. Forward Current (PC358)

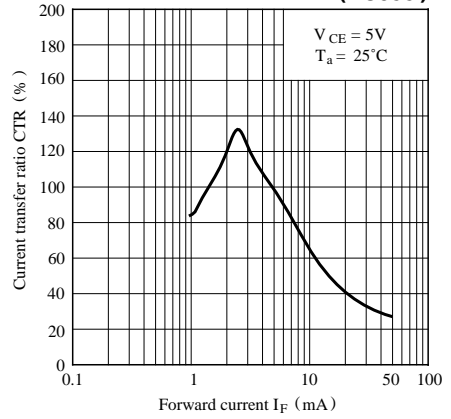


Fig. 8-a Collector Current vs. Collector-emitter Voltage (PC356NT)

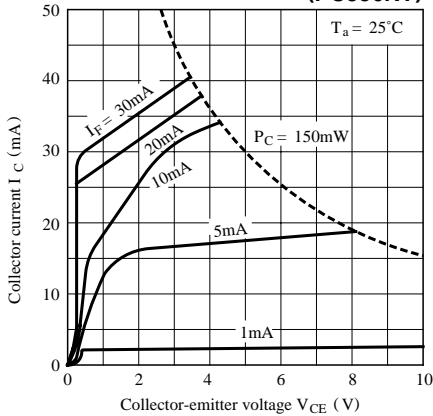


Fig. 8-b Collector Current vs. Collector-emitter Voltage (PC358)

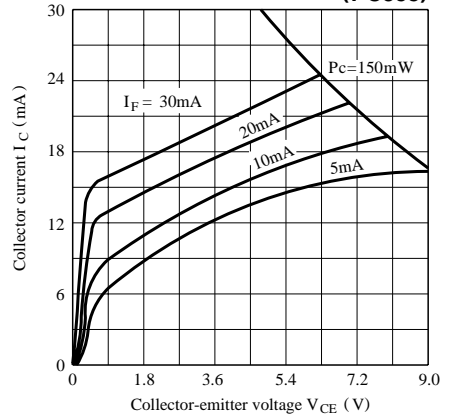


Fig. 9-a Relative Current Transfer Ratio vs. Ambient Temperature (PC356NT)

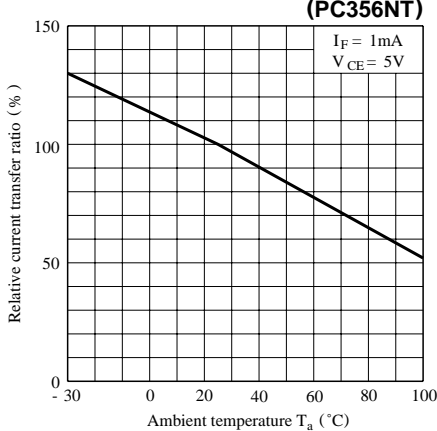


Fig. 9-b Relative Current Transfer Ratio vs. Ambient Temperature (PC358)

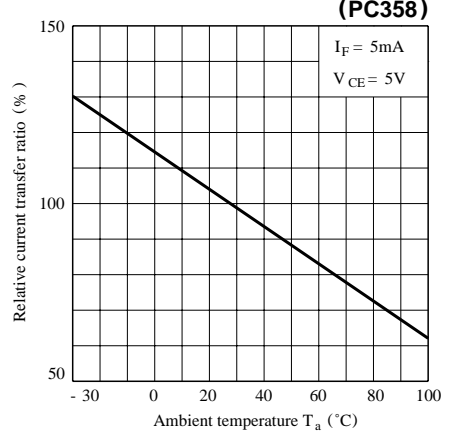


Fig.10-a Collector-emitter Saturation Voltage vs. Ambient Temperature (PC356NT)

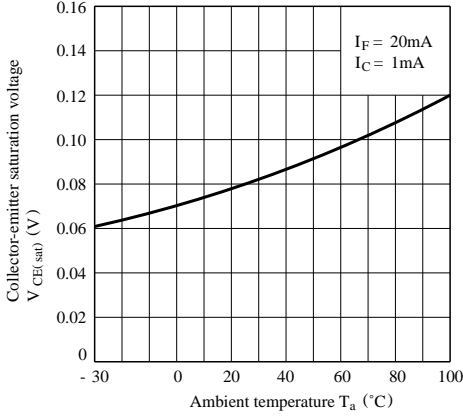


Fig.10-b Collector-emitter Saturation Voltage vs. Ambient Temperature (PC358)

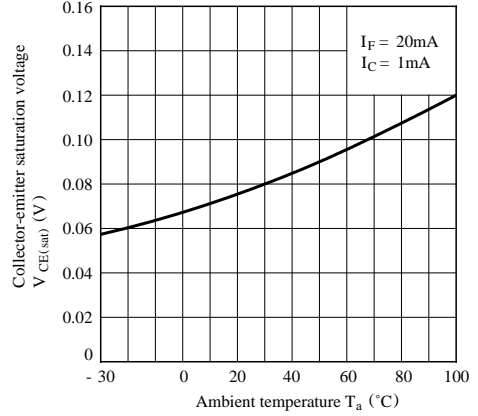


Fig.11-a Collector Dark Current vs. Ambient Temperature (PC356NT)

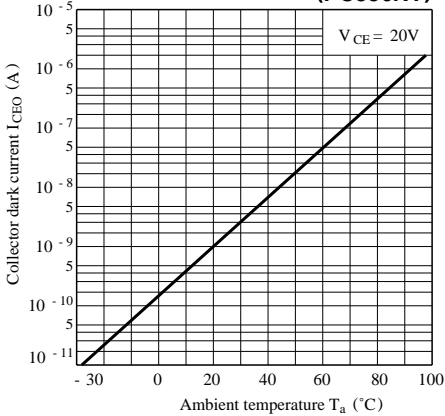


Fig.11-b Collector Dark Current vs. Ambient Temperature (PC358)

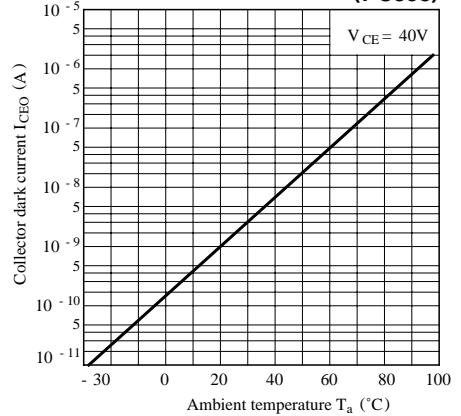


Fig.12-a Response Time vs. Load Resistance (PC356NT)


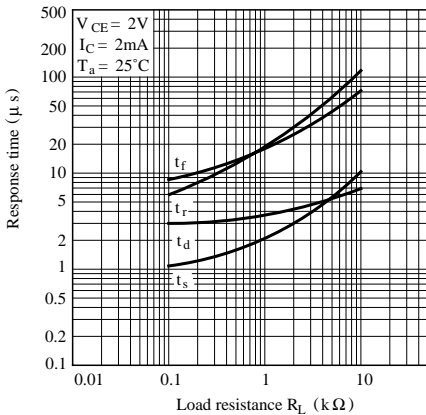


Fig.12-b Response Time vs. Load Resistance (PC358)

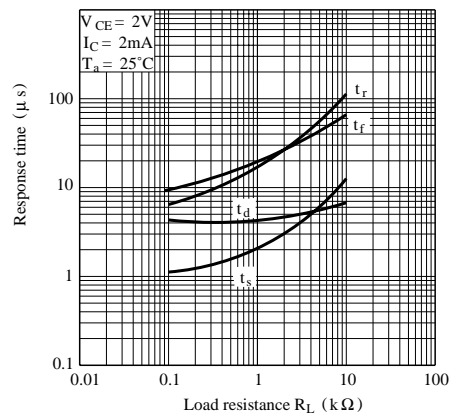

Test Circuit for Response Time

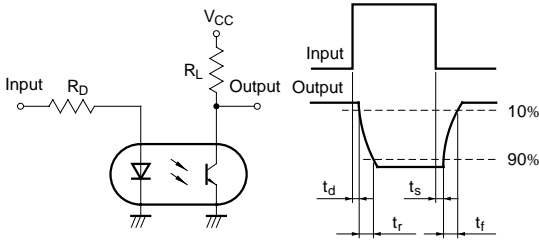


Fig.13-a Collector-emitter Saturation Voltage vs. Forward Current (PC356NT)



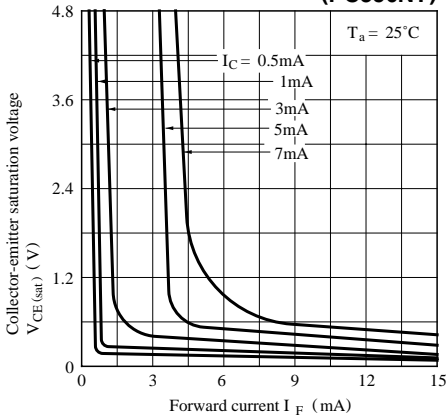


Fig.13-b Collector-emitter Saturation Voltage vs. Forward Current (PC358)

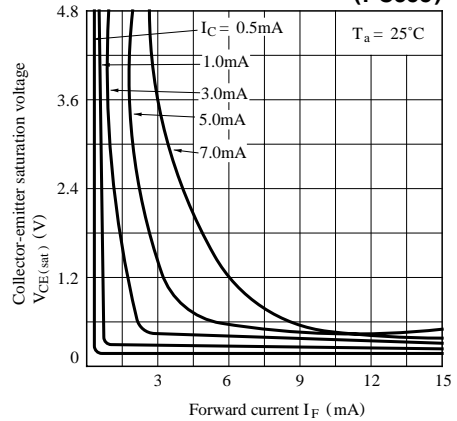

Temperature Profile of Soldering Reflow

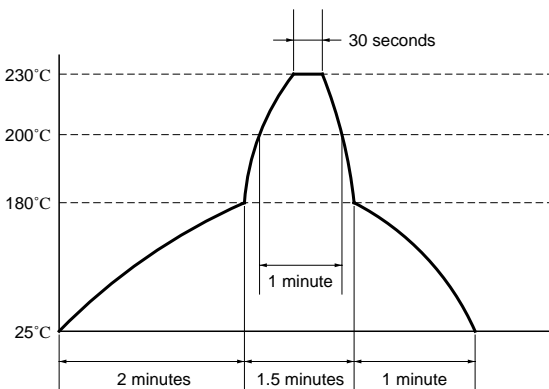

- (1) One time soldering reflow is recommended within the condition of temperature and time profile shown below.
- (2) When using another soldering method such as infrared ray lamp, the temperature may rise partially in the mold of the device. Keep the temperature on the package of the device within the condition of above (1).

● Please refer to the chapter “Precautions for Use”.

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.