

# S101N11/S101N12 S201N11/S201N12

## ■ Features

1. Built-in snubber circuit
2. Input side voltage operation type
3. Built-in zero-cross circuit (**S101N12/S201N12**)
4. RMS ON-state current  $I_r$  : MAX. 1.6Arms

## ■ Applications

1. Programmable controllers
2. Copiers
3. Air conditioners
4. Automatic vending machines

## ■ Model line-ups

	For 100V lines	For 200V lines
No zero-cross circuit	<b>S101N11</b>	<b>S201N11</b>
Built-in zero-cross circuit	<b>S101N12</b>	<b>S201N12</b>

## ■ Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Rating	Unit
Input	Input signal voltage	$V_{IN}$	3 to 6	V
	Reverse voltage	$V_R$	6	V
Output	Standard voltage	<b>S101N11</b>	120	$V_{rms}$
		<b>S101N12</b>		
		<b>S201N11</b>	240	
	Operating frequency	f	47 to 63	Hz
	Output supply voltage	$V_{out}$	<b>S101N11</b>	60 to 140
<b>S101N12</b>			60 to 280	
RMS ON-state current	$I_r$	*1 1.6	$A_{rms}$	
*2 Peak one cycle surge current	$I_{surge}$	15	A	
Operating temperature	$T_{opr}$	-25 to +80	°C	
Storage temperature	$T_{stg}$	-30 to +85	°C	
*3 Isolation voltage	$V_{iso}$	3.0	$kV_{rms}$	
*4 Soldering temperature	$T_{sol}$	260	°C	

\*1 Refer to Fig.1

\*2 50Hz sine wave, start at  $T_j=25^\circ\text{C}$

\*3 Isolation voltage measuring method

(1) Dielectric withstand voltage tester with zero cross circuit shall be used.

(2) The applied voltage waveform shall be sine wave.

(3) Voltage shall be applied between input and output.

(Input and output terminals shall be shorted respectively.)


(4) AC 60Hz, 1min, 40 to 60%RH.

\*4 For 5s

## Voltage Input Type Solid State Relay with Built-in Snubber Circuit

## ■ Outline Dimensions

(Unit : mm)

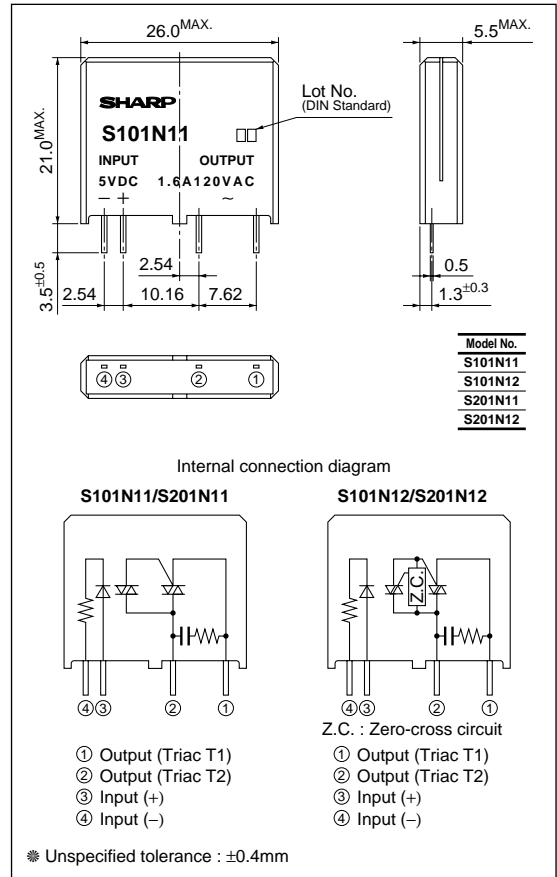

**■ Recommended Operating Conditions**

(Ta=25°C)


Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Input voltage	$V_{IN}$	–	4	–	6	V
Output	Load supply voltage	S101N11	–	80	–	120	$V_{rms}$
		S101N12				260	
		S201N11 S201N12					
	Load operating current	–	Refer to Fig.1	0.05	–	1.6	$A_{rms}$
Operating frequency		f	–	47	–	63	Hz

**■ Electrical Characteristics**


(Ta=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Input resistance	$R_{IN}$	–	–	160	–	$\Omega$	
	Pickup voltage	S101N11/S101N12	$V_{pu}$	–	–	3	V	
		S201N11/S201N12						
	Dropout voltage	S101N11/S101N12	$V_{do}$	–	1	–	–	V
S201N11/S201N12								
Output	ON-state voltage	$V_T$	$I_T=1.6A_{rms}$ , Resistance load, $V_{IN}=3V$	–	–	1.6	$V_{rms}$	
	Open circuit leak current	S101N11/S101N12	$I_{leak}$	–	–	0.7	$mA_{rms}$	
		S201N11/S201N12				1.3		
	Minimum operating current	S101N11/S101N12	$I_{OP}$	$V_D=60V$ , Resistance load, $V_{IN}=3V$	–	–	10	$mA_{rms}$
		S201N11/S201N12					20	
Zero-cross voltage	S101N12/S201N12	$V_{OX}$	$V_{IN}=3V$ , $R_L=400\Omega$	–	–	35	V	
Transfer characteristics	Turn-on time	S101N11	$t_{on}$	–	–	0.5	ms	
		S101N12				11		
		S201N11				0.5		
		S201N12				11		
	Turn-off time	S101N11/S101N12	$t_{off}$	–	–	–	11	ms
S201N11/S201N12								
Isolation resistance		$R_{iso}$	DC500V, 40 to 60%RH	100	–	–	$M\Omega$	


**Fig.1 RMS ON-state Current vs. Ambient Temperature**

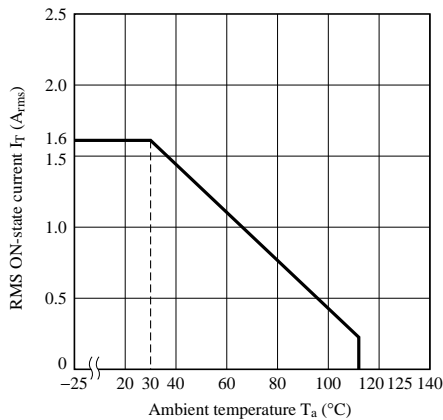


**Fig.2 Open Circuit Leak Current vs. Ambient Temperature (Typical Value)**

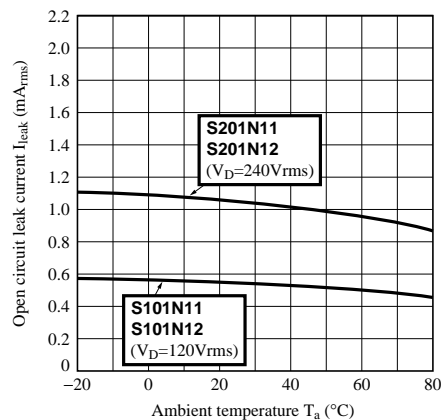


**Fig.3 Input Current vs. Input Voltage (Typical Value)**

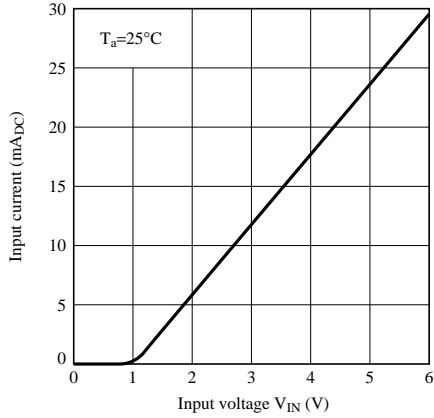


**Fig.4 Non-repetitive Surge Current vs. Time**

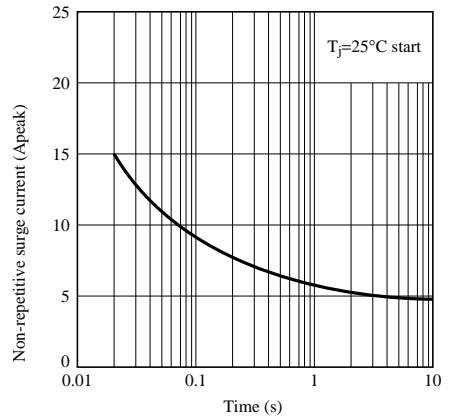

**Fig.5 Pickup Voltage, Dropout Voltage vs. Ambient Temperature**

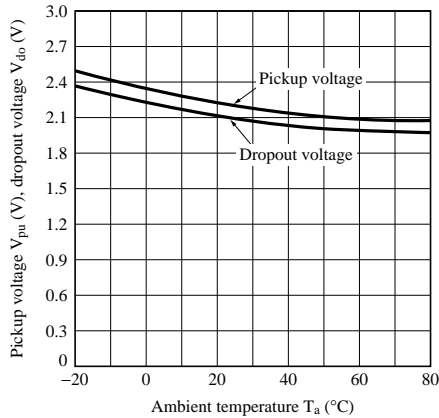

**Fig.6 Maximum ON-state Power Dissipation vs. RMS ON-state Current**

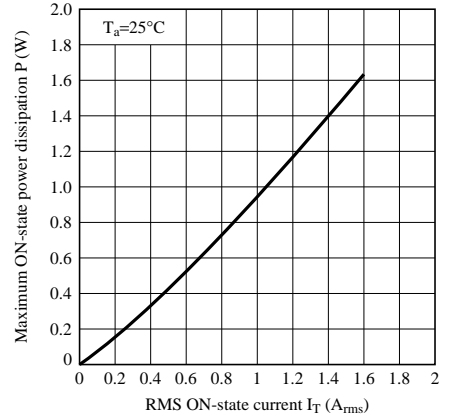

### NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
  - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
    - Personal computers
    - Office automation equipment
    - Telecommunication equipment [terminal]
    - Test and measurement equipment
    - Industrial control
    - Audio visual equipment
    - Consumer electronics
  - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
    - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
    - Traffic signals
    - Gas leakage sensor breakers
    - Alarm equipment
    - Various safety devices, etc.
  - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
    - Space applications
    - Telecommunication equipment [trunk lines]
    - Nuclear power control equipment
    - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.