

TOSHIBA PHOTOREFLECTIVE SENSORS INFRARED LED + PHOTOTRANSISTOR

TLP908, TLP908(LB)

DETECTION OF START AND END MARKS ON VCR AND AUDIO TAPE

Unit : mm

DETECTION OF VCR REEL ROTATION


DETECTION OF INDEX WRITE-PROTECT AND PRESENCE OF DISK IN FLOPPY DISK DRIVE

TIMING DETECTION IN ELECTRONIC PRINTERS AND TYPEWRITERS


READING OF CAMERA FILM INFORMATION (DX CODES)

- Very small package : 2.6 × 3.4 mm (height 1.5 mm)
 TLP908 : Flat lead type
 TLP908 (LB) : Small DIP type
- Short detection distance : Optimum distance 0.5 mm~1.5 mm
- High sensitivity : $t_r, t_f = 10 \mu s$ (typ.)
- Black mold package impermeable to visible light


PIN CONNECTION



1. ANODE
2. CATHODE
3. COLLECTOR
4. EMITTER

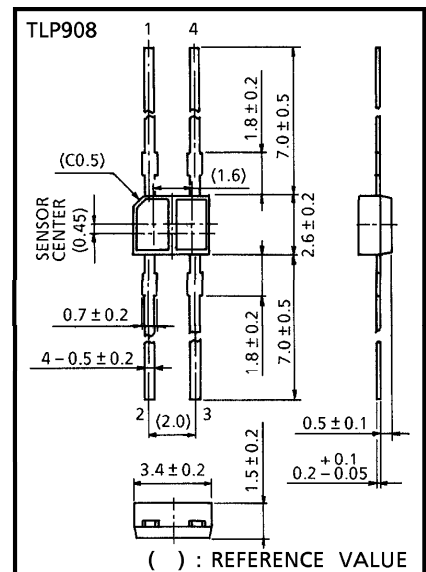

JEDEC	—
JEITA	—
TOSHIBA	11-4B1

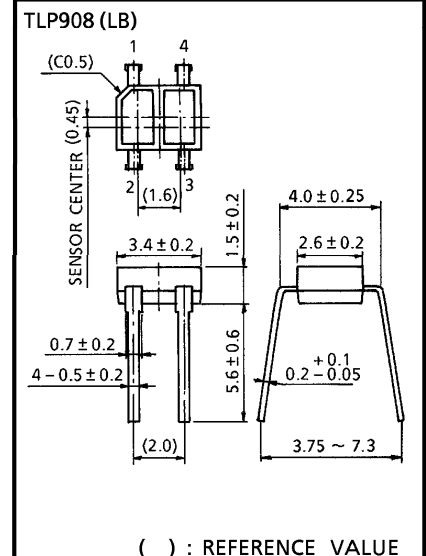

JEDEC	—
JEITA	—
TOSHIBA	11-4B101

Weight : 0.05g (typ.)

MAXIMUM RATINGS (Ta = 25°C)


CHARACTERISTIC		SYMBOL	RATING	UNIT
LED	Forward Current	I_F	50	mA
	Forward Current Derating (Ta > 25°C)	$\Delta I_F / ^\circ\text{C}$	-0.67	mA / °C
	Pulse Forward Current (Note 1)	I_{FP}	400	mA
	Reverse Voltage	V_R	5	V
DETECTOR	Collector-Emitter Voltage	V_{CEO}	30	V
	Emitter-Collector Voltage	V_{ECO}	5	V
	Collector Power Dissipation	P_C	50	mW
	Collector Power Dissipation Derating (Ta > 25°C)	$\Delta P_C / ^\circ\text{C}$	-0.67	mW / °C
	Collector Current	I_C	20	mA
Operating Temperature Range		T_{opr}	-25~85	°C
Storage Temperature Range		T_{stg}	-30~100	°C

(Note 1) : Pulse width $\leq 100 \mu\text{s}$, Repetitive frequency = 100 Hz

OPTICAL AND ELECTRICAL CHARACTERISTICS (Ta = 25°C)


CHARACTERISTIC		SYMBOL	TEST CONDITION	Min	Typ.	Max	UNIT	
LED	Forward Voltage	V_F	$I_F = 10 \text{ mA}$	1.00	1.15	1.30	V	
	Reverse Current	I_R	$V_R = 5 \text{ V}$	—	—	10	μA	
	Peak Emission Wavelength	λ_P	$I_F = 10 \text{ mA}$	—	940	—	nm	
DETECTOR	Dark Current	$I_D (I_{CEO})$	$V_{CE} = 10 \text{ V}, I_F = 0$	—	—	0.1	μA	
	Peak Sensitivity Wavelength	λ_P	—	—	900	—	nm	
COUPLED	Current Current	I_C	$V_{CE} = 5 \text{ V}, I_F = 10 \text{ mA}$	TLP908	50	—	750	μA
				TLP908 (R)	50	—	150	
				TLP908 (O)	110	—	330	
				TLP908 (LB)	50	—	750	
				TLP908 (R, LB)	50	—	150	
				TLP908 (O, LB)	110	—	330	
	Leakage Current	I_{LEAK}	$V_{CE} = 5 \text{ V}, I_F = 10 \text{ mA}$ No reflecting substance exists.	—	—	0.1	μA	
Collector-Emitter Saturation Voltage	$V_{CE}(\text{sat})$	$I_F = 10 \text{ mA}, I_C = 25 \mu\text{A}$	—	0.15	0.4	V		
Rise Time	t_r	$V_{CC} = 10 \text{ V}, I_C = 1 \text{ mA}, R_L = 1 \text{ k}\Omega$	—	10	—	μs		
Fall Time	t_f		—	10	—			

(Note 2) : Collector current test method

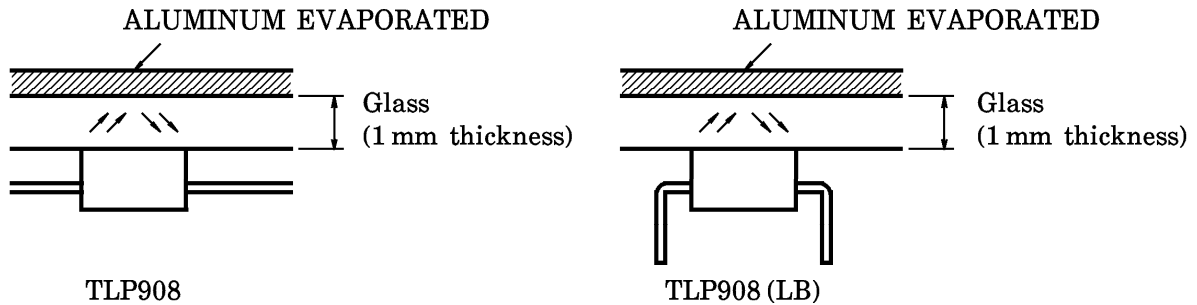


PRECAUTIONS

- Soldering temperature : 260°C max Soldering time : 3 s max



TLP908













TLP908 (LB)





The diagonally shaded part in the diagrams on the left represent the soldering area.

- When forming the leads, be careful not to apply stress to the main body of the device (the resin part). Soldering must be performed after the leads have been formed.
- The collector current increases over time due to current flowing in the infrared LED. The design of circuits which incorporate the device must take into account the change in collector current over time. The change in collector current is equal to the reciprocal of the change in LED infrared optical output.


$$\frac{I_C(t)}{I_C(0)} = \frac{P_O(t)}{P_O(0)}$$

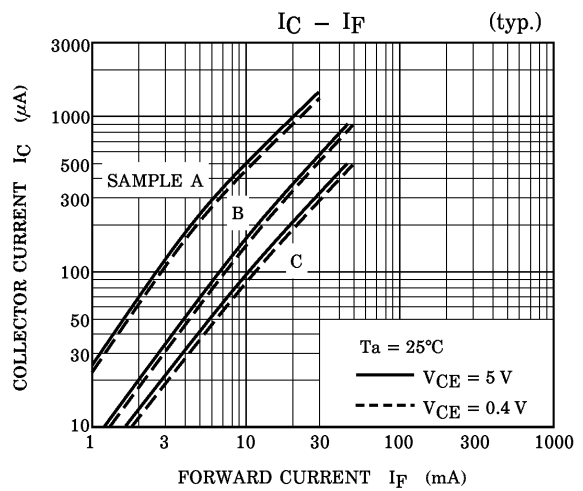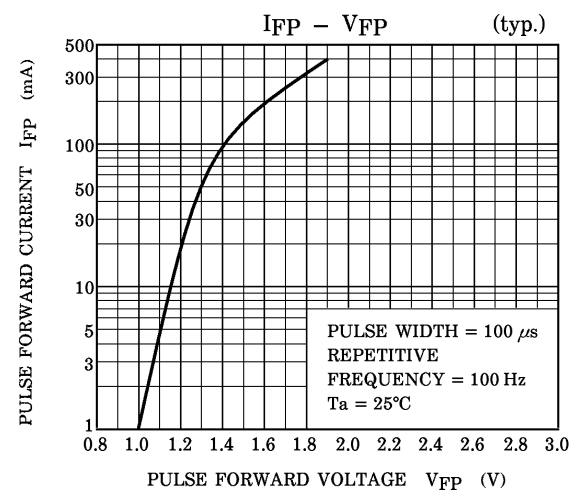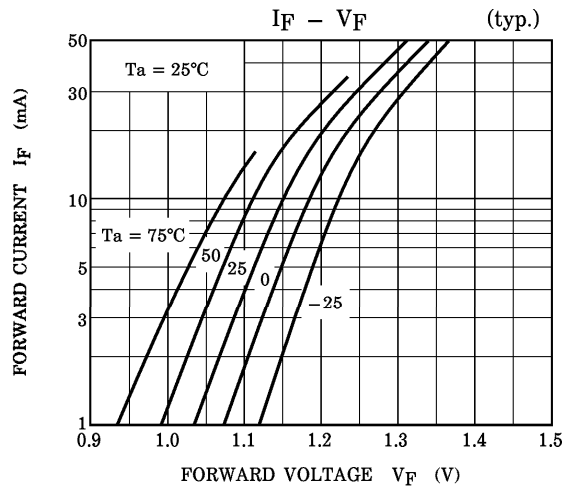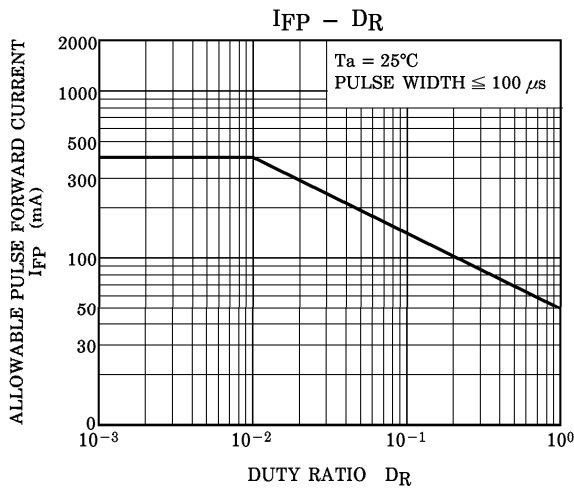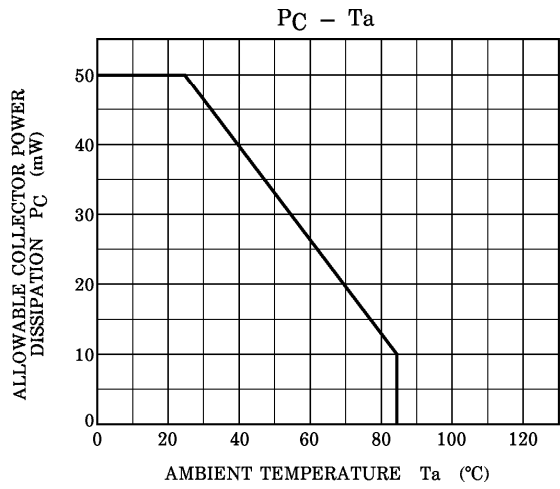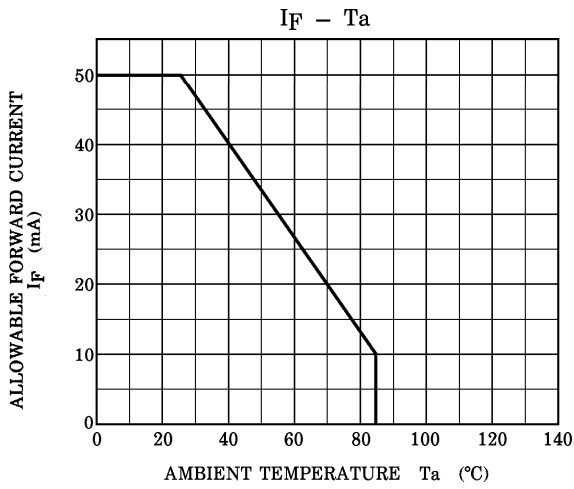

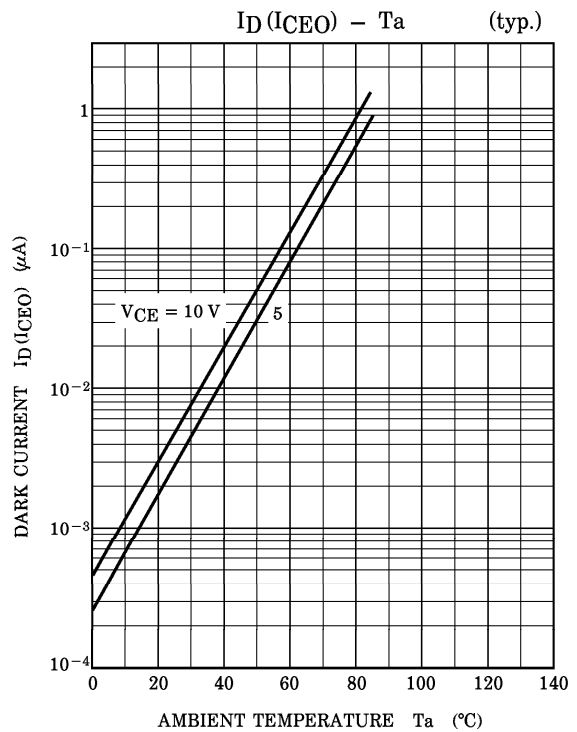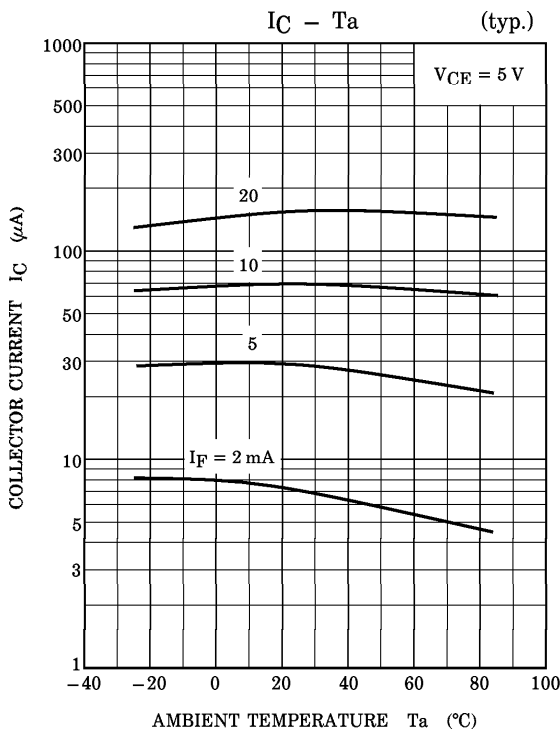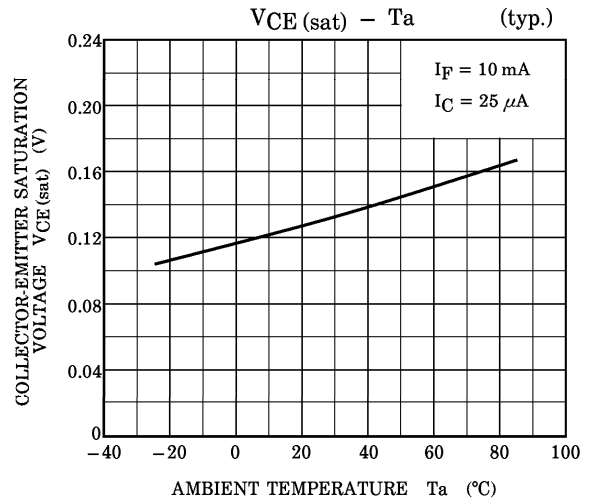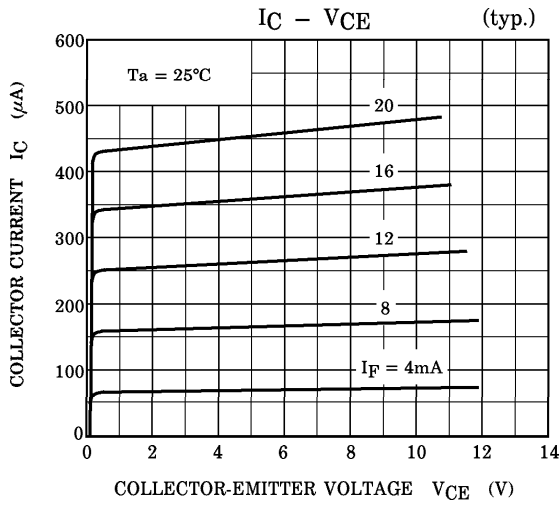


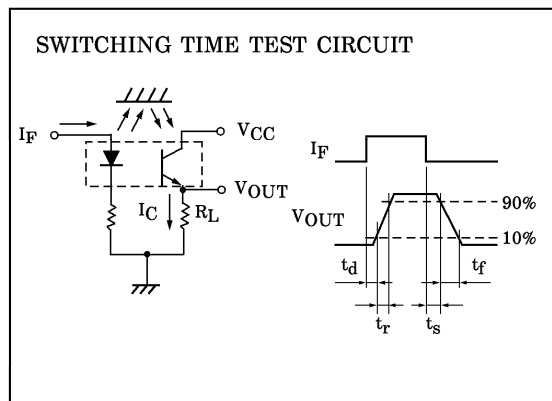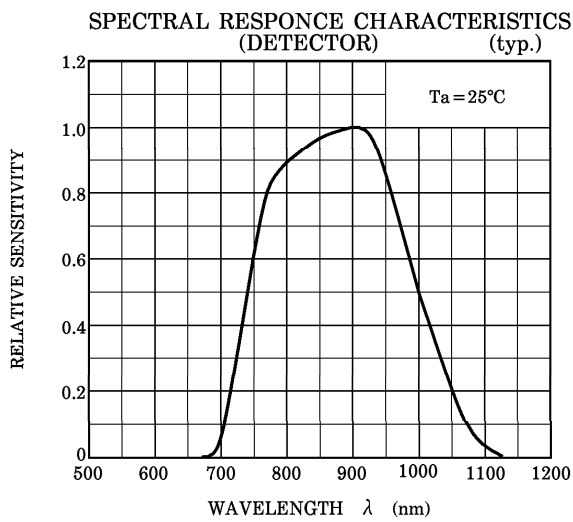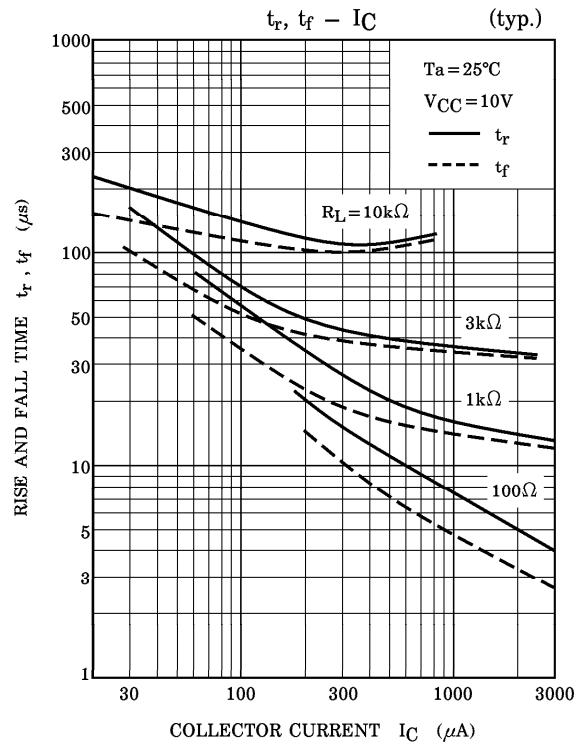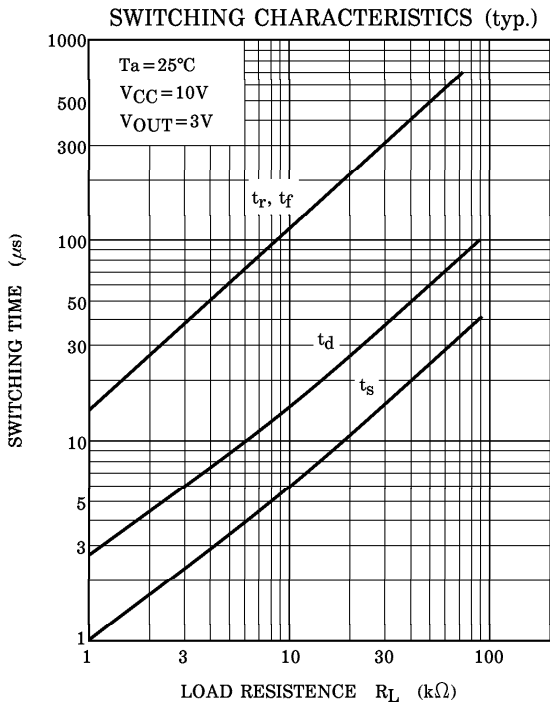


DETECTION DISTANCE CHARACTERISTIC (1) (typ.)

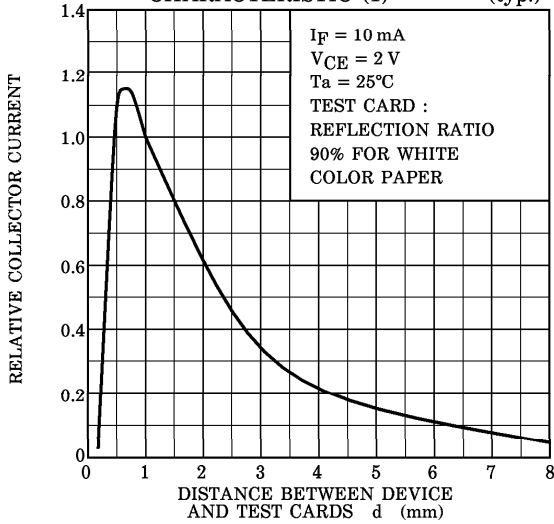


DETECTION POSITION CHARACTERISTIC (1) (typ.)

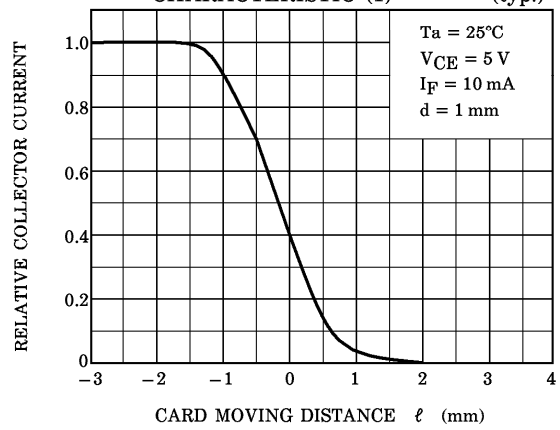


DETECTION DISTANCE CHARACTERISTIC (2) (typ.)

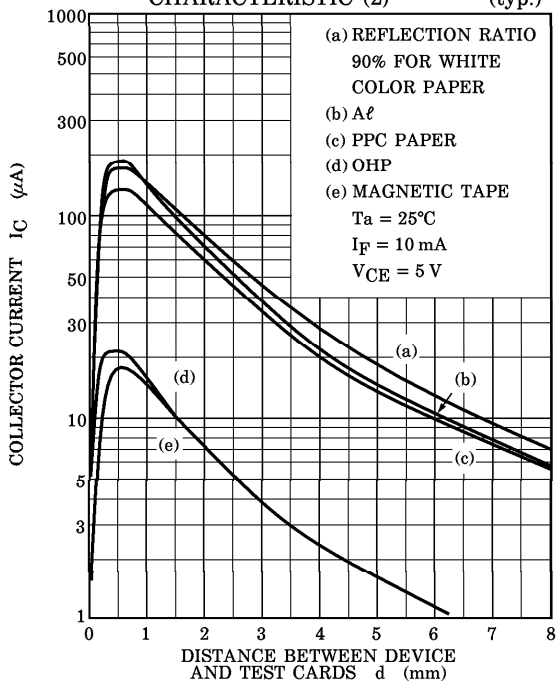

DETECTION POSITION CHARACTERISTIC (2) (typ.)

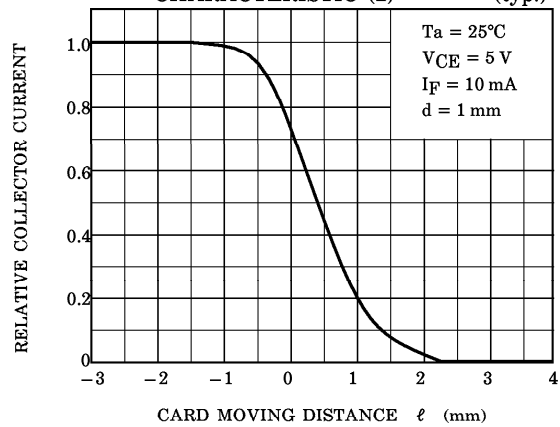

TEST CONDITIONS FOR DETECTION POSITION CHARACTERISTICS

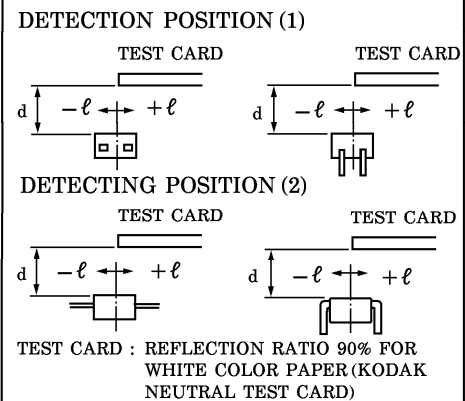

RESTRICTIONS ON PRODUCT USE

000707EAC

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.