

# General-purpose dual line amplifier

## BA3118L

The BA3118L is a dual-channel line amplifier with a flat frequency characteristic. It has been designed for use in radio cassette players and car stereos.

The feedback resistors are all on the chip, which reduces the number of external components required and simplifies PCB design. The gain can be set to one of 10 gain settings from 6dB to 20dB (6dB, 8dB, 10dB, 10.9dB, 12.4dB, 13.4dB, 15.1dB, 16dB, 17.9dB and 20dB), and external fine trimming is possible.

### ● Applications

Car stereos and radio cassette players

### ● Features

- 1) 10 gain settings over the range 6dB to 20dB (max. step 2dB) without external resistors.
- 2) Low distortion.
- 3) Good crosstalk characteristics.
- 4) Low noise.
- 5) Flat frequency characteristic.
- 6) Two channels on one chip allows compact set design.
- 7) Pin 9 is not connected which simplifies the PBC GND design.
- 8) Built-in feedback resistors reduces the number of external components required.
- 9) Low gain variance between the two channels.

### ● Absolute maximum ratings (Ta = 25°C)


Parameter	Symbol	Limits	Unit
Supply voltage	V <sub>CC</sub>	18	V
Power dissipation	P <sub>d</sub>	400*	mW
Operating temperature	T <sub>opr</sub>	-25~85	°C
Storage temperature	T <sub>stg</sub>	-55~125	°C

\* 1 Reduced by 4.0mW for each increase in Ta of 1°C over 25°C.

### ● Recommended operating conditions (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply voltage range	V <sub>CC</sub>	4	—	16	V

●Block diagram

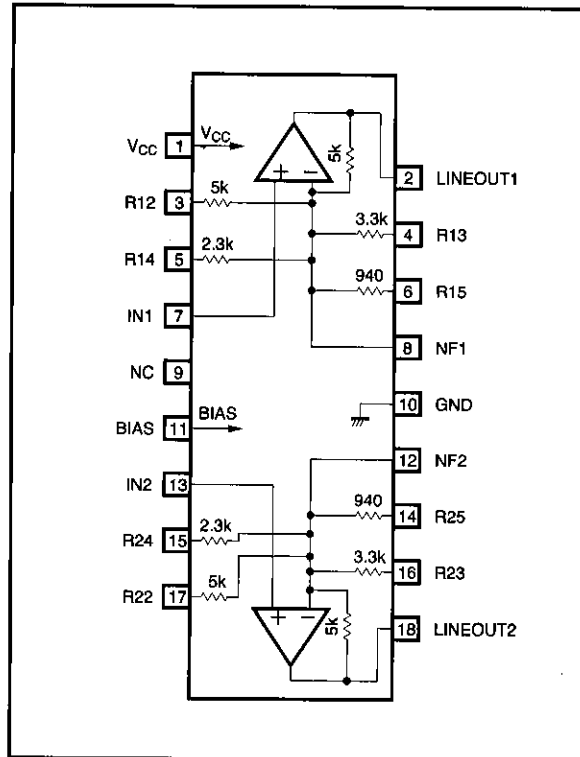

●Electrical characteristics (unless otherwise specified  $T_a = 25^\circ\text{C}$ ,  $V_{CC} = 8.0\text{V}$ ,  $f = 1\text{kHz}$  and  $G_{VC} = 20\text{dB}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Quiescent current	$I_Q$	—	3.8	5.6	mA	$V_{IN} = 0\text{V}_{rms}$
Open-circuit voltage gain	$G_{VC}$	19	20	21	dB	$V_{IN} = -20\text{dBm}$ , DIN AUDIO
Maximum output voltage	$V_{OM}$	1.1	1.9	—	$V_{rms}$	THD=1%, BPF400~30kHz
Total harmonic distortion	THD	—	0.017	0.15	%	$V_O = 0\text{dBm}$ , $R_L = 30\text{k}\Omega$
Input conversion-noise voltage	$V_{NIN}$	—	1.1	2.1	$\mu\text{V}_{rms}$	$V_{IN} = 0\text{V}_{rms}$ , $R_g = 0\Omega$ , DIN AUDIO
Interchannel crosstalk	CT	—	-92	-72	dB	$V_O = 0\text{dBm}$ , $R_L = 30\text{k}\Omega$
Input resistance	$R_{IN}$	30	45	60	$\text{k}\Omega$	$V_{IN} = 0.1\text{V}_{rms}$
Ripple rejection	RR	35	44	—	dB	$V_{RR} = -20\text{dBm}$ , $f_{RR} = 100\text{Hz}$

Line amplifiers

Low-frequency amplifiers

● Measurement circuit


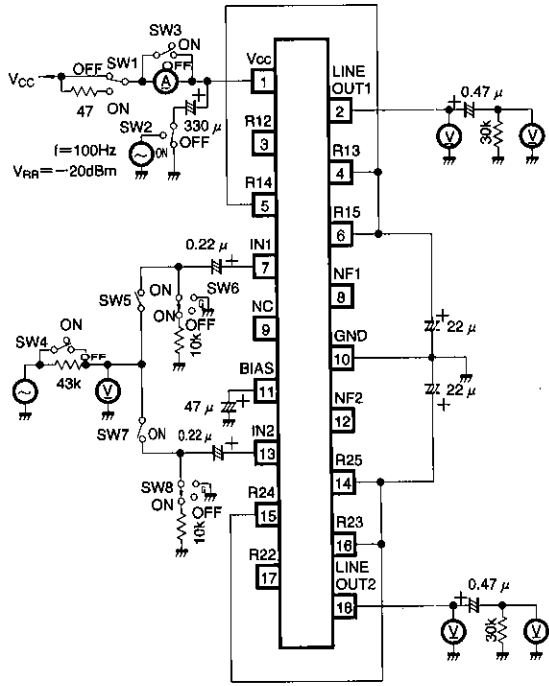


Fig. 1

Measurement circuit switch setting table

SW No. Item	1	2	3	4	5	6	7	8
I <sub>q</sub>	OFF	OFF	ON	OFF	OFF	ON	OFF	ON
G <sub>VC</sub>	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
V <sub>OM</sub>	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
THD	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
V <sub>NIN</sub>	OFF	OFF	OFF	OFF	OFF	G	OFF	G
CT	OFF	OFF	OFF	OFF	ON/OFF	OFF/ON	OFF/ON	ON/OFF
R <sub>IN</sub>	OFF	OFF	OFF	ON	ON/OFF	OFF	OFF/ON	OFF
RR	ON	ON	OFF	OFF	OFF	ON	OFF	ON

● Gain setting pattern diagrams

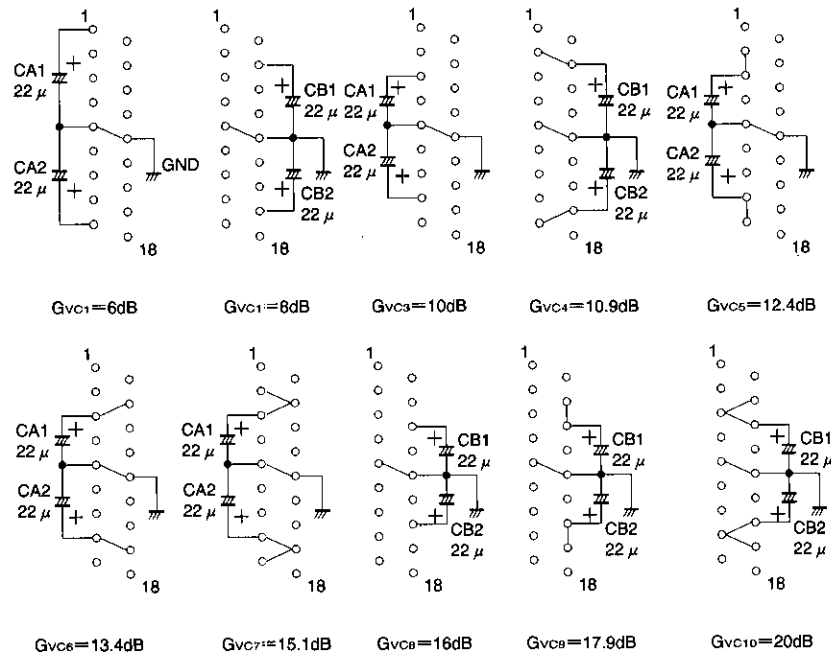

● Application example

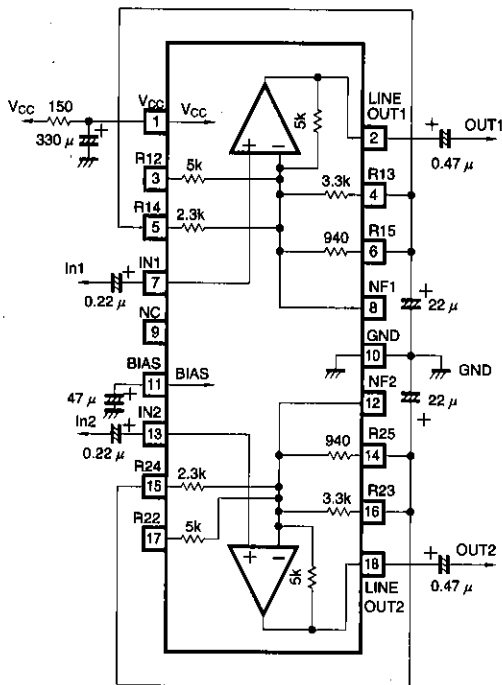


Fig. 2

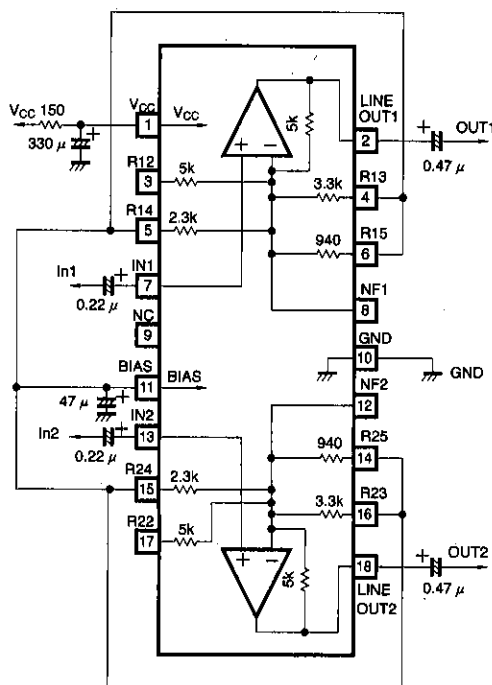


Fig. 3

Line amplifiers

Low-frequency amplifiers

●Electrical characteristics curves

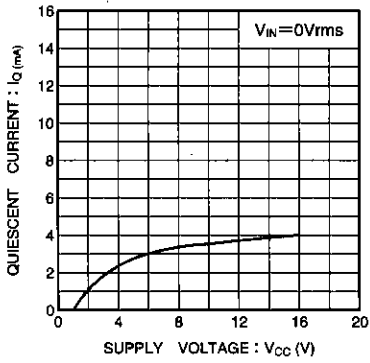


Fig. 4 Quiescent current vs. supply voltage

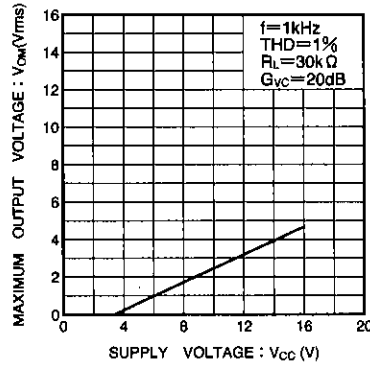


Fig. 5 Maximum output voltage vs. supply voltage

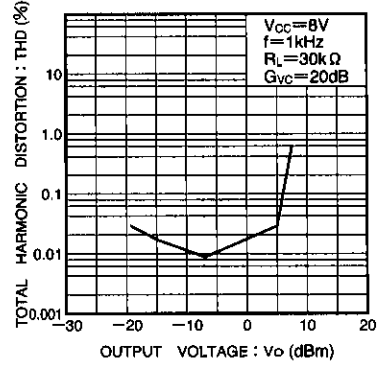


Fig. 6 Total harmonic distortion vs. output voltage


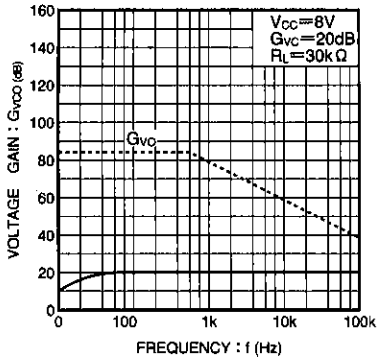


Fig. 7 Voltage gain vs. frequency

●External dimensions (Unit: mm)

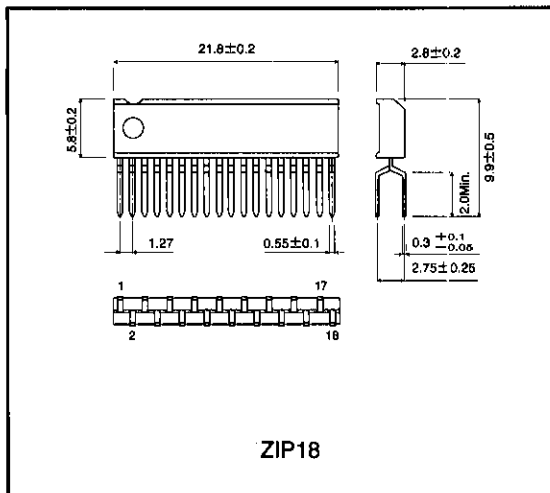

## Notes

- The contents described in this catalogue are correct as of March 1997.
- No unauthorized transmission or reproduction of this book, either in whole or in part, is permitted.
- The contents of this book are subject to change without notice. Always verify before use that the contents are the latest specifications. If, by any chance, a defect should arise in the equipment as a result of use without verification of the specifications, ROHM CO., LTD., can bear no responsibility whatsoever.
- Application circuit diagrams and circuit constants contained in this data book are shown as examples of standard use and operation. When designing for mass production, please pay careful attention to peripheral conditions.
- Any and all data, including, but not limited to application circuit diagrams, information, and various data, described in this catalogue are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO., LTD., disclaims any warranty that any use of such device shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes absolutely no liability in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices; other than for the buyer's right to use such devices itself, resell or otherwise dispose of the same; no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by ROHM CO., LTD., is granted to any such buyer.
- The products in this manual are manufactured with silicon as the main material.
- The products in this manual are not of radiation resistant design.

The products listed in this catalogue are designed to be used with ordinary electronic equipment or devices (such as audio-visual equipment, office-automation equipment, communications devices, electrical appliances, and electronic toys). Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers, or other safety devices) please be sure to consult with our sales representatives in advance.

- Notes when exporting
  - It is essential to obtain export permission when exporting any of the above products when it falls under the category of strategic material (or labor) as determined by foreign exchange or foreign trade control laws.
  - Please be sure to consult with our sales representatives to ascertain whether any product is classified as a strategic material.