

FM / TV front end

BA4425F

The BA4425F is a monolithic IC designed for FM front end use. It consists of an RF amplifier circuit, mixer circuit, oscillation circuit, and IF buffer amplifier.

●Applications

FM radios
Radio cassette players
Home stereos
Headphone stereos

●Features

- 1) Uses double balance mixer to improve secondary signal characteristics.
- 2) Includes a clamp diode in the mixer output.
- 3) Oscillation buffer on-chip for improved response to strong input.
- 4) The output impedance of the IF buffer is matched with the ceramic filter impedance at 330 Ω .
- 5) Mixer input coupling capacitor included on-chip.
- 6) Includes a feedback capacitor for the oscillation circuit.
- 7) Reception of TV channels 1 through 12 is possible.
- 8) Compact SOP 8-pin package.

●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Supply voltage	Vcc	7.0	V
Power dissipation*	Pd	500*	mW
Operating temperature	Topr	-25~75	°C
Storage temperature	Tstg	-55~125	°C


* Above Ta = 25°C, decreases by 5.0 mW per degree.

●Recommended operating conditions (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Supply voltage*	Vcc	1.6~6.0	V

* Basic operation must be at Ta = 25°C.

●Block diagram

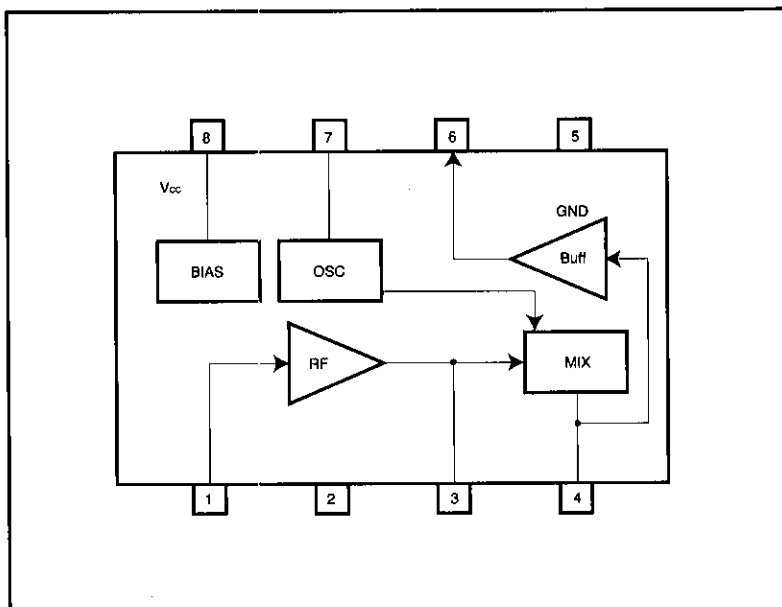

●Pin assignments

Pin No.	Pin name	Function
1	FM antenna input pin	Connects to BPF, etc. $Z_N = 75 \Omega$
2	RF amplifier bypass pin	Connects to bypass capacitor
3	RF amplifier output load pin	Connects to RF tuning circuit
4	MIX output pin	Connects to IFT or resistor load
5	GND pin	Ground pin of IC
6	IF buffer output pin	$Z_{OUT} = 330 \Omega$
7	OSC pin	Connects to station resonance circuit
8	Vcc pin	Voltage supply pin of IC

●Electrical characteristics (unless otherwise indicated, $T_a = 25^\circ\text{C}$ and $V_{CC} = 4.0\text{V}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Measurement Circuit
Quiescent current	I_o	2.6	4.5	7.2	mA	No input	Fig.1
Output saturation voltage	V_o	30	50	72	mVrms	$f_d = 98\text{MHz}$, $80\text{dB } \mu\text{V}$	Fig.1
Oscillator voltage	V_{osc}	200	400	630	mVrms	$f_{osc} = 108\text{MHz}$, $R_T = 0 \Omega$	Fig.1
Voltage conversion gain	G_{vc}	31	36	42	dB	$f_d = 98\text{MHz}$, $55\text{dB } \mu\text{V}$	Fig.1
Oscillation stop voltage	V_{STOP}	--	0.9	1.2	V	$R_T = 0 \Omega$	Fig.1

● Measurement circuit

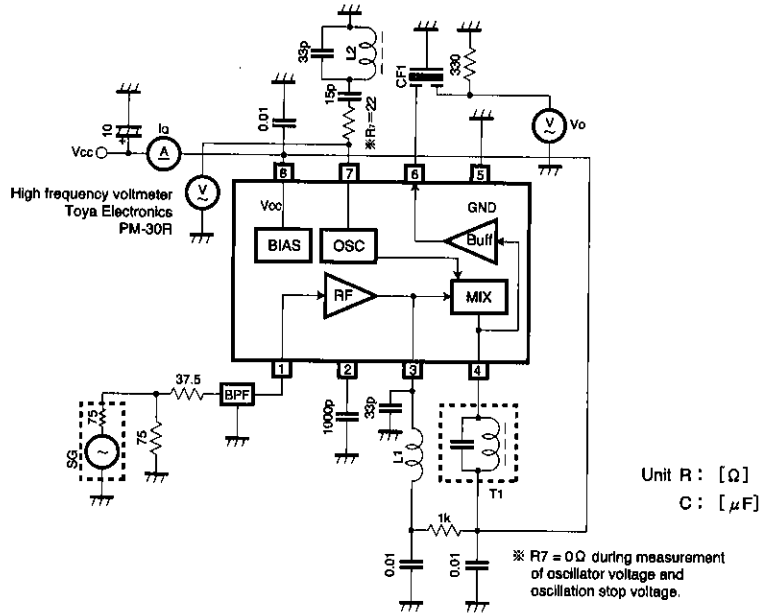





Fig. 1

High-frequency signal processors



Front end

●Component data

Component number	Component name	Product number / Manufacturer	Remarks
Z1	Band-pass filter	BPMB6A Soshin	88~108MHz Z _{in} =75Ω、Z _{out} =75Ω
L1	RF coil	FEM10C-2F6 Sumida	 ①-③ 2½T Wire type: φ 0.6UEW No load: Q = 115
L2	OSC coil	FEM10C-2F6 Sumida	 ①-③ 2½T Wire type: φ 0.6UEW No load: Q = 115
T1	IFT	2158-4095-498 Sumida	 ①-③ 13T Wire type: φ 0.10MUEW Tuning frequency: 10.7 MHz ± 3% or higher, variable No load: Q = 70 or higher (10.7 MHz) Tuning capacitance:
CF1	FM ceramic filter	SFE10.7MA5-A Murata	3 dB bandwidth = 280 kHz ± 50 kHz

●Electrical characteristic curves

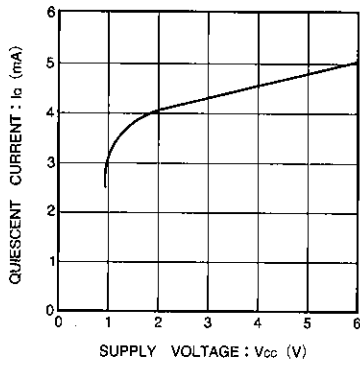


Fig. 2 Quiescent current vs. supply voltage

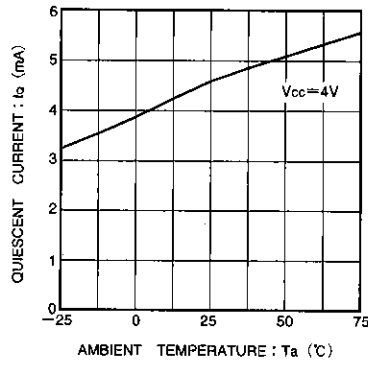


Fig. 3 Quiescent current vs. ambient temperature

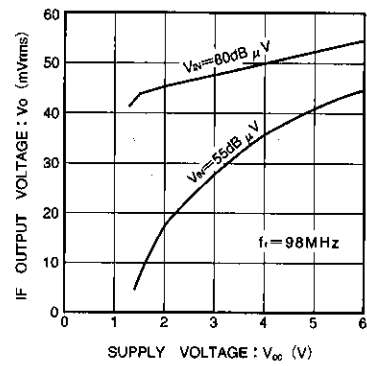


Fig. 4 IF output voltage vs. supply voltage

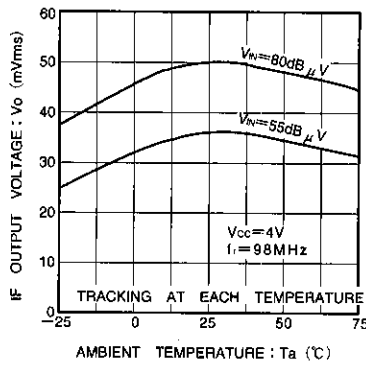


Fig. 5 IF output voltage vs. ambient temperature

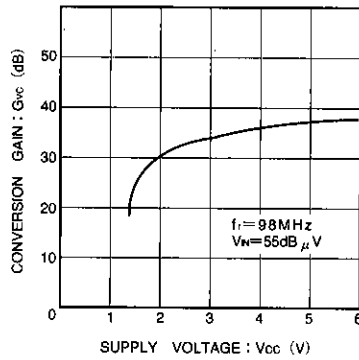


Fig. 6 Conversion gain vs. supply voltage

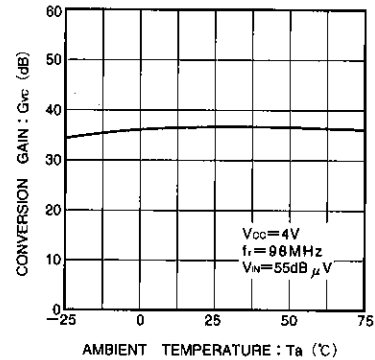


Fig. 7 Conversion gain vs. ambient temperature

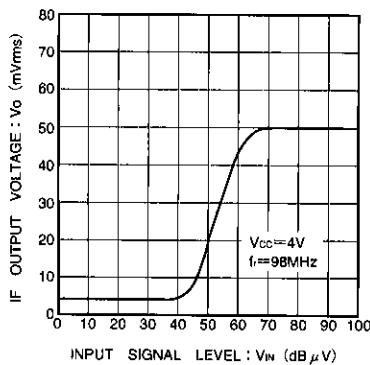


Fig. 8 IF output voltage vs. input signal level

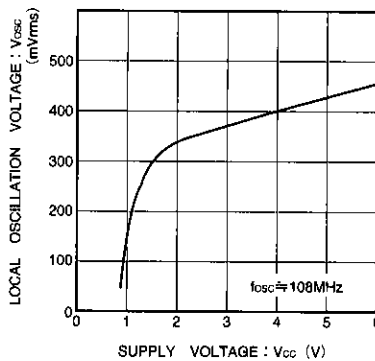


Fig. 9 Local oscillation voltage vs. supply voltage

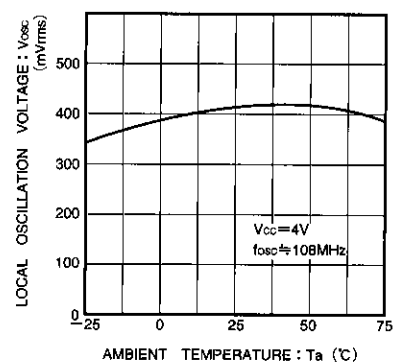


Fig. 10 Local oscillation voltage vs. ambient temperature

Front end

High-frequency signal processors

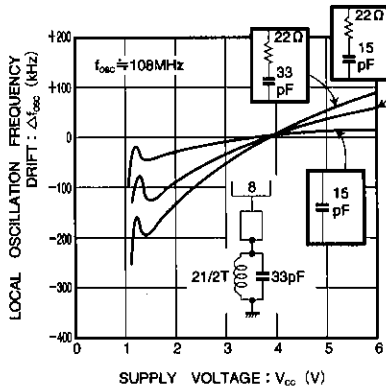


Fig. 11 Local oscillation frequency vs. supply voltage


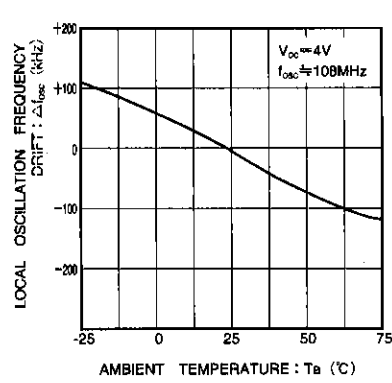


Fig. 12 Local oscillation frequency vs. ambient temperature

● External dimensions (Unit: mm)

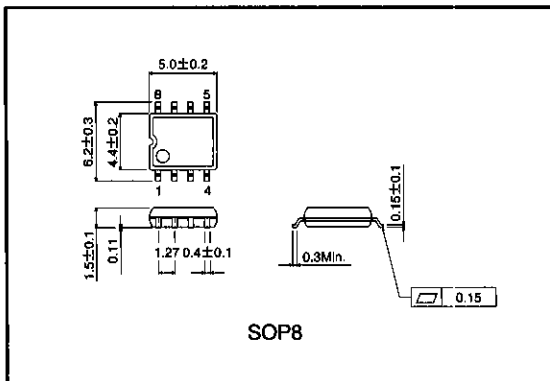

Notes

- The contents described in this catalogue are correct as of March 1997.
- No unauthorized transmission or reproduction of this book, either in whole or in part, is permitted.
- The contents of this book are subject to change without notice. Always verify before use that the contents are the latest specifications. If, by any chance, a defect should arise in the equipment as a result of use without verification of the specifications, ROHM CO., LTD., can bear no responsibility whatsoever.
- Application circuit diagrams and circuit constants contained in this data book are shown as examples of standard use and operation. When designing for mass production, please pay careful attention to peripheral conditions.
- Any and all data, including, but not limited to application circuit diagrams, information, and various data, described in this catalogue are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO., LTD., disclaims any warranty that any use of such device shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes absolutely no liability in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices; other than for the buyer's right to use such devices itself, resell or otherwise dispose of the same; no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by ROHM CO., LTD., is granted to any such buyer.
- The products in this manual are manufactured with silicon as the main material.
- The products in this manual are not of radiation resistant design.

The products listed in this catalogue are designed to be used with ordinary electronic equipment or devices (such as audio-visual equipment, office-automation equipment, communications devices, electrical appliances, and electronic toys). Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers, or other safety devices) please be sure to consult with our sales representatives in advance.

- Notes when exporting
 - It is essential to obtain export permission when exporting any of the above products when it falls under the category of strategic material (or labor) as determined by foreign exchange or foreign trade control laws.
 - Please be sure to consult with our sales representatives to ascertain whether any product is classified as a strategic material.