

DATA SHEET

For a complete data sheet, please also download:

- The IC04 LOCMOS HE4000B Logic Family Specifications HEF, HEC
- The IC04 LOCMOS HE4000B Logic Package Outlines/Information HEF, HEC

HEF4519B

MSI

Quadruple 2-input multiplexer

Product specification
File under Integrated Circuits, IC04

January 1995

Quadruple 2-input multiplexer

HEF4519B MSI



DESCRIPTION

The HEF4519B provides four multiplexing circuits with common select inputs (S_A , S_B); each circuit contains two inputs (A_n , B_n) and one output (O_n). It may be used to select four bits of information from one of two sources.

The 'A' inputs are selected when S_A is HIGH, the 'B' inputs when S_B is HIGH. When S_A and S_B are HIGH, the output (O_n) is the logical EXCLUSIVE-NOR of the A_n and B_n inputs ($O_n = A_n \odot B_n$).

When S_A and S_B are LOW, the output (O_n) is LOW, independent of the multiplexer inputs (A_n and B_n).

The HEF4519B cannot be used to multiplex analogue signals. The outputs utilize standard buffers for best performance.

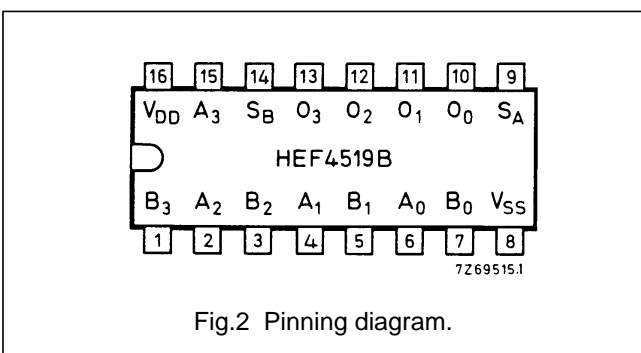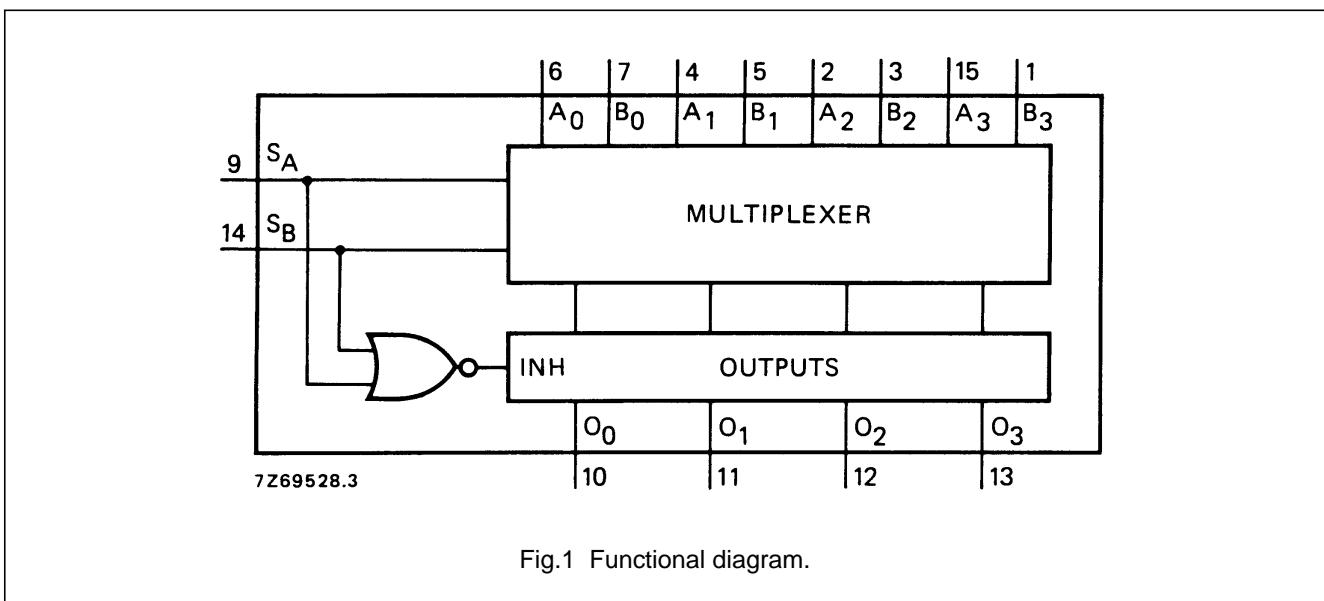

PINNING

- S_A , S_B selects inputs (active HIGH)
- A_0 to A_3 multiplexer inputs
- B_0 to B_3 multiplexer inputs
- O_0 to O_3 multiplexer outputs


FAMILY DATA, I_{DD} LIMITS category MSI

See Family Specifications

- HEF4519BP(N): 16-lead DIL; plastic (SOT38-1)
- HEF4519BD(F): 16-lead DIL; ceramic (cerdip) (SOT74)
- HEF4519BT(D): 16-lead SO; plastic (SOT109-1)
- (): Package Designator North America

Quadruple 2-input multiplexer

HEF4519B
MSI

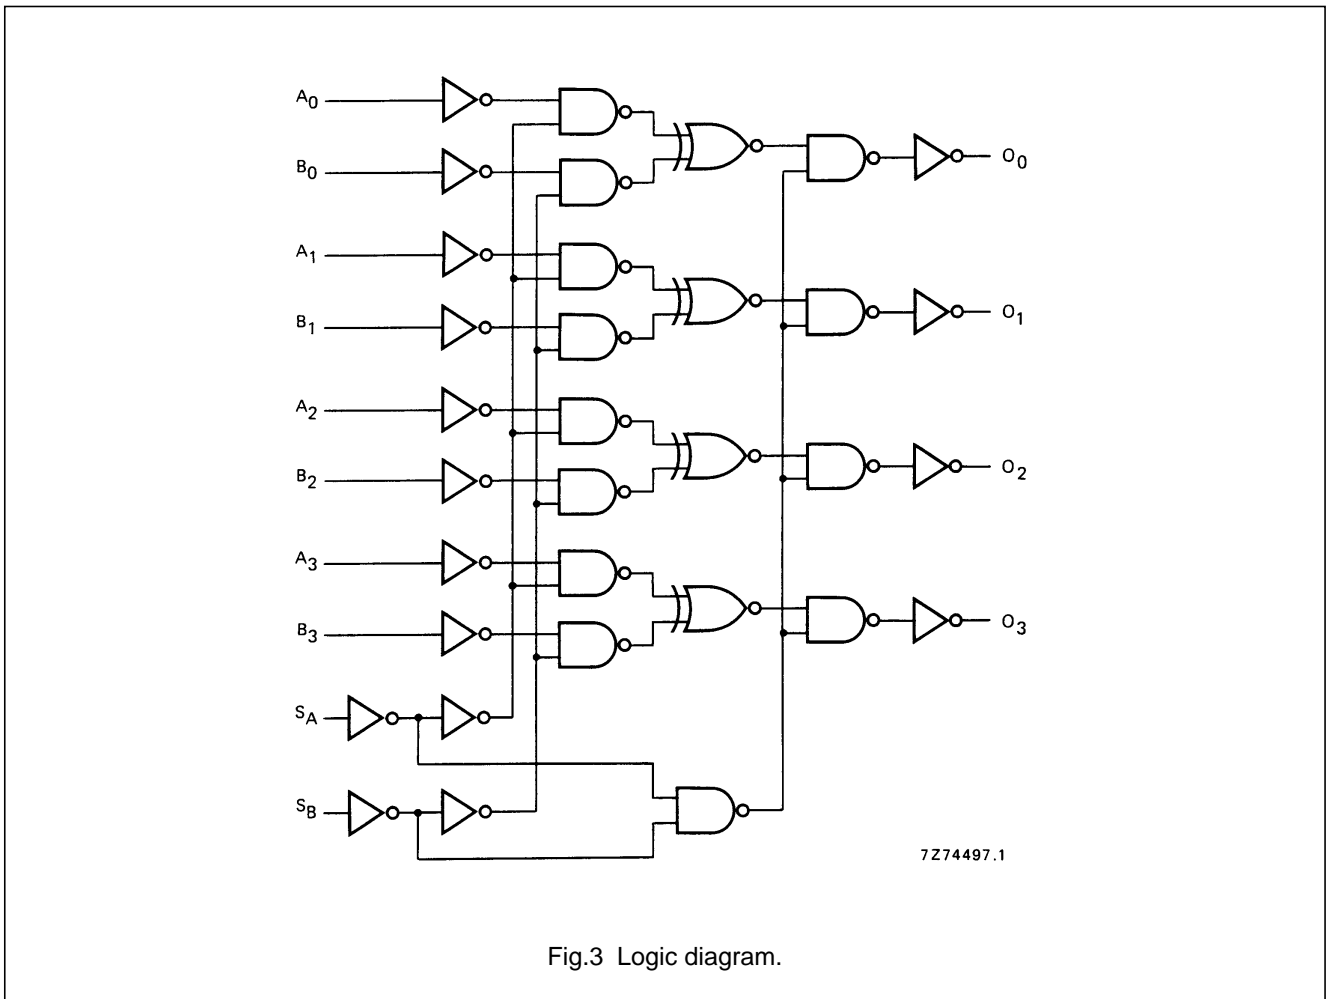

FUNCTION TABLE

| INPUTS | | | | OUTPUT |
|----------------|----------------|----------------|----------------|----------------|
| S _A | S _B | A _n | B _n | O _n |
| L | L | X | X | L |
| H | L | A _n | X | A _n |
| L | H | X | B _n | B _n |
| H | H | L | L | H |
| H | H | H | L | L |
| H | H | L | H | L |
| H | H | H | H | H |

Notes

1. H = HIGH state (the more positive voltage)
L = LOW state (the less positive voltage)
X = state is immaterial

Quadruple 2-input multiplexer

HEF4519B MSI

AC CHARACTERISTICS

$V_{SS} = 0\text{ V}$; $T_{amb} = 25\text{ °C}$; $C_L = 50\text{ pF}$; input transition times $\leq 20\text{ ns}$

| | V_{DD} V | SYMBOL | TYP. | MAX. | | TYPICAL EXTRAPOLATION FORMULA |
|--|---------------|-----------|------|------|----|--|
| Propagation delays $A_n, B_n \rightarrow O_n$ HIGH to LOW LOW to HIGH $S_A, S_B \rightarrow O_n$ HIGH to LOW LOW to HIGH | 5 | t_{PHL} | 95 | 190 | ns | $68\text{ ns} + (0,55\text{ ns/pF}) C_L$ |
| | 10 | | 40 | 80 | ns | $29\text{ ns} + (0,23\text{ ns/pF}) C_L$ |
| | 15 | | 30 | 60 | ns | $22\text{ ns} + (0,16\text{ ns/pF}) C_L$ |
| | 5 | t_{PLH} | 80 | 160 | ns | $53\text{ ns} + (0,55\text{ ns/pF}) C_L$ |
| | 10 | | 40 | 80 | ns | $29\text{ ns} + (0,23\text{ ns/pF}) C_L$ |
| | 15 | | 30 | 60 | ns | $22\text{ ns} + (0,16\text{ ns/pF}) C_L$ |
| | 5 | t_{PHL} | 95 | 190 | ns | $68\text{ ns} + (0,55\text{ ns/pF}) C_L$ |
| | 10 | | 40 | 80 | ns | $29\text{ ns} + (0,23\text{ ns/pF}) C_L$ |
| | 15 | | 30 | 55 | ns | $22\text{ ns} + (0,16\text{ ns/pF}) C_L$ |
| | 5 | t_{PLH} | 85 | 165 | ns | $58\text{ ns} + (0,55\text{ ns/pF}) C_L$ |
| | 10 | | 40 | 80 | ns | $29\text{ ns} + (0,23\text{ ns/pF}) C_L$ |
| | 15 | | 30 | 60 | ns | $22\text{ ns} + (0,16\text{ ns/pF}) C_L$ |
| Output transition times HIGH to LOW LOW to HIGH | 5 | t_{THL} | 60 | 120 | ns | $10\text{ ns} + (1,0\text{ ns/pF}) C_L$ |
| | 10 | | 30 | 60 | ns | $9\text{ ns} + (0,42\text{ ns/pF}) C_L$ |
| | 15 | | 20 | 40 | ns | $6\text{ ns} + (0,28\text{ ns/pF}) C_L$ |
| | 5 | t_{TLH} | 60 | 120 | ns | $10\text{ ns} + (1,0\text{ ns/pF}) C_L$ |
| | 10 | | 30 | 60 | ns | $9\text{ ns} + (0,42\text{ ns/pF}) C_L$ |
| | 15 | | 20 | 40 | ns | $6\text{ ns} + (0,28\text{ ns/pF}) C_L$ |

| | V_{DD} V | TYPICAL FORMULA FOR P (μW) | |
|---|---------------|--|---|
| Dynamic power dissipation per package (P) | 5 | $1000 f_i + \sum (f_o C_L) \times V_{DD}^2$ | where f_i = input freq. (MHz) f_o = output freq. (MHz) C_L = load capacitance (pF) $\sum (f_o C_L)$ = sum of outputs V_{DD} = supply voltage (V) |
| | 10 | $6000 f_i + \sum (f_o C_L) \times V_{DD}^2$ | |
| | 15 | $17\,000 f_i + \sum (f_o C_L) \times V_{DD}^2$ | |

APPLICATION INFORMATION

Some examples of applications for the HEF4519B are:

- 2-input multiplexers.
- True/complement selectors.