

LCD Bias Supply With Integrated Level Shifters

Check for Samples : [TPS65163](#)

FEATURES

- 8.6-V to 14.7-V Input Voltage Range
- 2.8-A Boost Converter Switch Current Limit
- Boost Converter Output Voltages up to 18.5 V
- Boost and Buck Converter Short-Circuit Protection
- 1.5-A Buck Converter (3.3 V) Switch Current Limit
- Fixed 750-kHz Switching Frequency for Buck and Boost Converters
- Buck Converter and Boost Converter Soft-Start
- Two Charge-Pump Controllers to Regulate V_{GH} and V_{GL}
- Control Signal for External High-Side MOSFET Isolation Switch
- 9-Channel Level Shifter Organized in Two Groups of 7 and 2 Channels (Separate V_{GH})
- Gate Shaping (Level Shifter Channels 1 to 6)
- Display Panel Discharge Function
- Supports V_{GH} Voltages up to 38 V
- Supports V_{GL} Voltages Down to -13 V
- Reset Signal With Programmable Reset-Pulse Duration
- Thermal Shutdown
- 48-Pin 7-mm × 7-mm QFN Package

APPLICATIONS

- LCD TVs and Monitors Using GIP Technology

DESCRIPTION

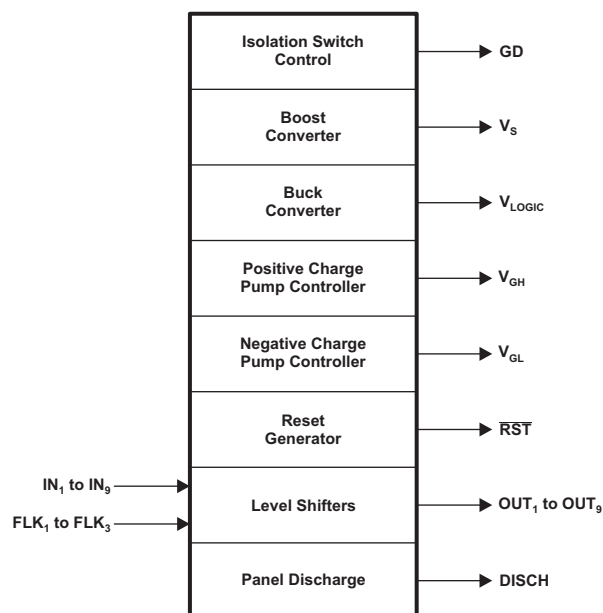
The TPS65163 integrates a boost converter, buck converter, reset generator, two charge pump controllers and a nine-channel level shifter in a single device.

In typical display panel applications, the boost converter generates the display panel source voltage, V_S ; the buck converter generates the system logic supply, V_{LOGIC} ; and the two charge pump controllers regulate the external charge pumps generating the display transistors' on and off supplies, V_{GH} and V_{GL} .

The level shifters transform the logic-level control signals generated by the display timing controller into the high-level signals needed by the LCD panel. The nine level-shifter channels are organized in two groups, each with its own positive supply voltage (V_{GH}). Each channel uses a low-impedance output stage to achieve fast rise and fall times, even when driving the capacitive loads present in LCD applications. Channels 1 to 6 also support gate voltage shaping.

The TPS65163 also provides a reset circuit that monitors the buck converter output (V_{LOGIC}) and generates a reset signal for the timing controller during power up and power down.

A control signal can also be generated to control an external MOSFET isolation switch located between the output of the boost converter and the display panel.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

TPS65163

SLVSA28 –OCTOBER 2009

www.ti.com


This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

ORDERING INFORMATION⁽¹⁾

T _A	ORDERING	PACKAGE	PACKAGE MARKING
–40°C to 85°C	TPS65163RGZR	48-Pin 7x7 QFN	TPS65163

(1) The device is supplied taped and reeled, with 3000 (TBC) devices per reel.

ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

		VALUE	UNIT
Supply voltage ⁽²⁾	VIN	–0.3 to 20	V
	VGH1, VGH2	–0.3 to 45	
	VGL	0.3 to –15	
Input voltage ⁽²⁾	FBN, FBP, FBB, FB, DLY, CRST, SS, COMP, VL, FLK1–FLK3, IN1–IN9, VSENSE	–0.3 to 7	V
Output voltage ⁽²⁾	RST	–0.3 to 7	V
	SWB, CTRLP, GD, SW, CTRLN	–0.3 to 20	
	RE	–0.3 to 45	
	OUT1–OUT9, DISCHARGE	–15 to 45	
Output current	GD	1	mA
	RE	100	
ESD rating	Human-body model	2000	V
	Machine model	200	V
	Charged-device model	700	V
	Continuous power dissipation	See Dissipation Table	W
Operating ambient temperature range		–40 to 85	°C
Operating junction temperature range		–40 to 150	°C
Storage temperature range		–65 to 150	°C

(1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) With respect to the GND and AGND pins.

DISSIPATION RATINGS

PACKAGE	R _{θJA}	T _A ≤ 25°C POWER RATING	T _A = 70°C POWER RATING	T _A = 85°C POWER RATING
48-pin QFN	36 °C/W	2.78 W	1.53 W	1.11 W

RECOMMENDED OPERATING CONDITIONS

over operating free-air temperature range (unless otherwise noted)

		MIN	TYP	MAX	UNIT
V _{IN}	Supply voltage range	8.6	12	14.7	V
V _S	Boost converter output voltage range	V _{IN} + 1	15	18.5	V
C _{IN}	Input capacitance	10	20	44	μF
L	Boost converter inductance	6.8	10	15	μH
C _{OUT}	Boost converter output capacitance	40	60	100	μF
L	Buck converter inductance	6.8	10	15	μH
C _{OUT}	Buck converter output capacitance	20	44	100	μF
T _A	Operating ambient temperature	–40	25	85	°C
T _J	Operating junction temperature	–40	85	125	°C

ELECTRICAL CHARACTERISTICS

V_{IN} = 12 V; V_S = 16 V; V_{LOGIC} = 3.3 V; V_{GH1} = V_{GH2} = 30 V; V_{GL} = –7 V; T_A = –40°C to 85°C; typical values are at 25°C (unless otherwise noted).

Pin 1: GND

Pin 2: V_{IN}

Pin 3: V_{FB}

Pin 4: V_{OUT}

Pin 5: GND

Pin 6: V_{REF}

Pin 7: V_{FB}

Pin 8: V_{OUT}

Pin 9: GND

Pin 10: V_{IN}

Pin 11: V_{FB}

Pin 12: V_{OUT}

Pin 13: GND

Pin 14: V_{REF}

Pin 15: V_{FB}

Pin 16: V_{OUT}

Pin 17: GND

Pin 18: V_{IN}

Pin 19: V_{FB}

Pin 20: V_{OUT}

Pin 21: GND

Pin 22: V_{REF}

Pin 23: V_{FB}

Pin 24: V_{OUT}

Pin 25: GND

Pin 26: V_{IN}

Pin 27: V_{FB}

Pin 28: V_{OUT}

Pin 29: GND

Pin 30: V_{REF}

Pin 31: V_{FB}

Pin 32: V_{OUT}

Pin 33: GND

Pin 34: V_{IN}

Pin 35: V_{FB}

Pin 36: V_{OUT}

Pin 37: GND

Pin 38: V_{REF}

Pin 39: V_{FB}

Pin 40: V_{OUT}

Pin 41: GND

Pin 42: V_{IN}

Pin 43: V_{FB}

Pin 44: V_{OUT}

Pin 45: GND

Pin 46: V_{REF}

Pin 47: V_{FB}

Pin 48: V_{OUT}

Pin 49: GND

Pin 50: V_{IN}

Pin 51: V_{FB}

Pin 52: V_{OUT}

Pin 53: GND

Pin 54: V_{REF}

Pin 55: V_{FB}

Pin 56: V_{OUT}

Pin 57: GND

Pin 58: V_{IN}

Pin 59: V_{FB}

Pin 60: V_{OUT}

Pin 61: GND

Pin 62: V_{REF}

Pin 63: V_{FB}

Pin 64: V_{OUT}

Pin 65: GND

Pin 66: V_{IN}

Pin 67: V_{FB}

Pin 68: V_{OUT}

Pin 69: GND

Pin 70: V_{REF}

Pin 71: V_{FB}

Pin 72: V_{OUT}

Pin 73: GND

Pin 74: V_{IN}

Pin 75: V_{FB}

Pin 76: V_{OUT}

Pin 77: GND

Pin 78: V_{REF}

Pin 79: V_{FB}

Pin 80: V_{OUT}

Pin 81: GND

Pin 82: V_{IN}

Pin 83: V_{FB}

Pin 84: V_{OUT}

Pin 85: GND

Pin 86: V_{REF}

Pin 87: V_{FB}

Pin 88: V_{OUT}

Pin 89: GND

Pin 90: V_{IN}

Pin 91: V_{FB}

Pin 92: V_{OUT}

Pin 93: GND

Pin 94: V_{REF}

Pin 95: V_{FB}

Pin 96: V_{OUT}

Pin 97: GND

Pin 98: V_{IN}

Pin 99: V_{FB}

Pin 100: V_{OUT}

Pin 101: GND

Pin 102: V_{REF}

Pin 103: V_{FB}

Pin 104: V_{OUT}

Pin 105: GND

Pin 106: V_{IN}

Pin 107: V_{FB}

Pin 108: V_{OUT}

Pin 109: GND

Pin 110: V_{REF}

Pin 111: V_{FB}

Pin 112: V_{OUT}

Pin 113: GND

Pin 114: V_{IN}

Pin 115: V_{FB}

Pin 116: V_{OUT}

Pin 117: GND

Pin 118: V_{REF}

Pin 119: V_{FB}

Pin 120: V_{OUT}

Pin 121: GND

Pin 122: V_{IN}

Pin 123: V_{FB}

Pin 124: V_{OUT}

Pin 125: GND

Pin 126: V_{REF}

Pin 127: V_{FB}

Pin 128: V_{OUT}

Pin 129: GND

Pin 130: V_{IN}

Pin 131: V_{FB}

Pin 132: V_{OUT}

Pin 133: GND

Pin 134: V_{REF}

Pin 135: V_{FB}

Pin 136: V_{OUT}

Pin 137: GND

Pin 138: V_{IN}

Pin 139: V_{FB}

Pin 140: V_{OUT}

Pin 141: GND

Pin 142: V_{REF}

Pin 143: V_{FB}

Pin 144: V_{OUT}

Pin 145: GND

Pin 146: V_{IN}

Pin 147: V_{FB}

Pin 148: V_{OUT}

Pin 149: GND

Pin 150: V_{REF}

Pin 151: V_{FB}

Pin 152: V_{OUT}

Pin 153: GND

Pin 154: V_{IN}

Pin 155: V_{FB}

Pin 156: V_{OUT}

Pin 157: GND

Pin 158: V_{REF}

Pin 159: V_{FB}

Pin 160: V_{OUT}

Pin 161: GND

Pin 162: V_{IN}

Pin 163: V_{FB}

Pin 164: V_{OUT}

Pin 165: GND

Pin 166: V_{REF}

Pin 167: V_{FB}

Pin 168: V_{OUT}

Pin 169: GND

Pin 170: V_{IN}

Pin 171: V_{FB}

Pin 172: V_{OUT}

Pin 173: GND

Pin 174: V_{REF}

Pin 175: V_{FB}

Pin 176: V_{OUT}

Pin 177: GND

Pin 178: V_{IN}

Pin 179: V_{FB}

Pin 180: V_{OUT}

Pin 181: GND

Pin 182: V_{REF}

Pin 183: V_{FB}

Pin 184: V_{OUT}

Pin 185: GND

Pin 186: V_{IN}

Pin 187: V_{FB}

Pin 188: V_{OUT}

Pin 189: GND

Pin 190: V_{REF}

Pin 191: V_{FB}

Pin 192: V_{OUT}

Pin 193: GND

Pin 194: V_{IN}

Pin 195: V_{FB}

Pin 196: V_{OUT}

Pin 197: GND

Pin 198: V_{REF}

Pin 199: V_{FB}

Pin 200: V_{OUT}

Pin 201: GND

Pin 202: V_{IN}

Pin 203: V_{FB}

Pin 204: V_{OUT}

Pin 205: GND

Pin 206: V_{REF}

Pin 207: V_{FB}

Pin 208: V_{OUT}

Pin 209: GND

Pin 210: V_{IN}

Pin 211: V_{FB}

Pin 212: V_{OUT}

Pin 213: GND

Pin 214: V_{REF}

Pin 215: V_{FB}

Pin 216: V_{OUT}

Pin 217: GND

Pin 218: V_{IN}

Pin 219: V_{FB}

Pin 220: V_{OUT}

Pin 221: GND

Pin 222: V_{REF}

Pin 223: V_{FB}

Pin 224: V_{OUT}

Pin 225: GND

Pin 226: V_{IN}

Pin 227: V_{FB}

Pin 228: V_{OUT}

Pin 229: GND

Pin 230: V_{REF}

Pin 231: V_{FB}

Pin 232: V_{OUT}

Pin 233: GND

Pin 234: V_{IN}

Pin 235: V_{FB}

Pin 236: V_{OUT}

Pin 237: GND

Pin 238: V_{REF}

Pin 239: V_{FB}

Pin 240: V_{OUT}

Pin 241: GND

Pin 242: V_{IN}

Pin 243: V_{FB}

Pin 244: V_{OUT}

Pin 245: GND

Pin 246: V_{REF}

Pin 247: V_{FB}

Pin 248: V_{OUT}

Pin 249: GND

Pin 250: V_{IN}

Pin 251: V_{FB}

Pin 252: V_{OUT}

Pin 253: GND

Pin 254: V_{REF}

Pin 255: V_{FB}

Pin 256: V_{OUT}

Pin 257: GND

Pin 258: V_{IN}

Pin 259: V_{FB}

Pin 260: V_{OUT}

Pin 261: GND

Pin 262: V_{REF}

Pin 263: V_{FB}

Pin 264: V_{OUT}

Pin 265: GND

Pin 266: V_{IN}

Pin 267: V_{FB}

Pin 268: V_{OUT}

Pin 269: GND

Pin 270: V_{REF}

Pin 271: V_{FB}

Pin 272: V_{OUT}

Pin 273: GND

Pin 274: V_{IN}

Pin 275: V_{FB}

Pin 276: V_{OUT}

Pin 277: GND

Pin 278: V_{REF}

Pin 279: V_{FB}

Pin 280: V_{OUT}

Pin 281: GND

Pin 282: V_{IN}

Pin 283: V_{FB}

Pin 284: V_{OUT}

Pin 285: GND

Pin 286: V_{REF}

Pin 287: V_{FB}

Pin 288: V_{OUT}

Pin 289: GND

Pin 290: V_{IN}

Pin 291: V_{FB}

Pin 292: V_{OUT}

Pin 293: GND

Pin 294: V_{REF}

Pin 295: V_{FB}

Pin 296: V_{OUT}

Pin 297: GND

Pin 298: V_{IN}

Pin 299: V_{FB}

Pin 300: V_{OUT}

Pin 301: GND

Pin 302: V_{REF}

Pin 303: V_{FB}

Pin 304: V_{OUT}

Pin 305: GND

Pin 306: V_{IN}

Pin 307: V_{FB}

Pin 308: V_{OUT}

Pin 309: GND

Pin 310: V_{REF}

Pin 311: V_{FB}

Pin 312: V_{OUT}

Pin 313: GND

Pin 314: V_{IN}

Pin 315: V_{FB}

Pin 316: V_{OUT}

Pin 317: GND

Pin 318: V_{REF}

Pin 319: V_{FB}

Pin 320: V_{OUT}

Pin 321: GND

Pin 322: V_{IN}

Pin 323: V_{FB}

Pin 324: V_{OUT}

Pin 325: GND

Pin 326: V_{REF}

Pin 327: V_{FB}

Pin 328: V_{OUT}

Pin 329: GND

Pin 330: V_{IN}

Pin 331: V_{FB}

Pin 332: V_{OUT}

Pin 333: GND

Pin 334: V_{REF}

Pin 335: V_{FB}

Pin 336: V_{OUT}

Pin 337: GND

Pin 338: V_{IN}

Pin 339: V_{FB}

Pin 340: V_{OUT}

Pin 341: GND

Pin 342: V_{REF}

Pin 343: V_{FB}

Pin 344: V_{OUT}

Pin 345: GND

Pin 346: V_{IN}

Pin 347: V_{FB}

Pin 348: V_{OUT}

Pin 349: GND

Pin 350: V_{REF}

Pin 351: V_{FB}

Pin 352: V_{OUT}

Pin 353: GND

Pin 354: V_{IN}

Pin 355: V_{FB}

Pin 356: V_{OUT}

Pin 357: GND

Pin 358: V_{REF}

Pin 359: V_{FB}

Pin 360: V_{OUT}

Pin 361: GND

Pin 362: V_{IN}

Pin 363: V_{FB}

Pin 364: V_{OUT}

Pin 365: GND

Pin 366: V_{REF}

Pin 367: V_{FB}

Pin 368: V_{OUT}

Pin 369: GND

Pin 370: V_{IN}

Pin 371: V_{FB}

Pin 372: V_{OUT}

Pin 373: GND

Pin 374: V_{REF}

Pin 375: V_{FB}

Pin 376: V_{OUT}

Pin 377: GND

Pin 378: V_{IN}

Pin 379: V_{FB}

Pin 380: V_{OUT}

Pin 381: GND

Pin 382: V_{REF}

Pin 383: V_{FB}

Pin 384: V_{OUT}

Pin 385: GND

Pin 386: V_{IN}

Pin 387: V_{FB}

Pin 388: V_{OUT}

Pin 389: GND

Pin 390: V_{REF}

Pin 391: V_{FB}

Pin 392: V_{OUT}

Pin 393: GND

Pin 394: V_{IN}

Pin 395: V_{FB}

Pin 396: V_{OUT}

Pin 397: GND

Pin 398: V_{REF}

Pin 399: V_{FB}

Pin 400: V_{OUT}

Pin 401: GND

Pin 402: V_{IN}

Pin 403: V_{FB}

Pin 404: V_{OUT}

Pin 405: GND

Pin 406: V_{REF}

Pin 407: V_{FB}

Pin 408: V_{OUT}

Pin 409: GND

Pin 410: V_{IN}

Pin 411: V_{FB}

Pin 412: V_{OUT}

Pin 413: GND

Pin 414: V_{REF}

Pin 415: V_{FB}

Pin 416: V_{OUT}

Pin 417: GND

Pin 418: V_{IN}

Pin 419: V_{FB}

Pin 420: V_{OUT}

Pin 421: GND

Pin 422: V_{REF}

Pin 423: V_{FB}

Pin 424: V_{OUT}

Pin 425: GND

Pin 426: V_{IN}

Pin 427: V_{FB}

Pin 428: V_{OUT}

Pin 429: GND

Pin 430: V_{REF}

Pin 431: V_{FB}

Pin 432: V_{OUT}

Pin 433: GND

Pin 434: V_{IN}

Pin 435: V_{FB}

Pin 436: V_{OUT}

Pin 437: GND

Pin 438: V_{REF}

Pin 439: V_{FB}

Pin 440: V_{OUT}

Pin 441: GND

Pin 442: V_{IN}

Pin 443: V_{FB}

Pin 444: V_{OUT}

Pin 445: GND

Pin 446: V_{REF}

Pin 447: V_{FB}

Pin 448: V_{OUT}

Pin 449: GND

Pin 450: V_{IN}

Pin 451: V_{FB}

Pin 452: V_{OUT}

Pin 453: GND

Pin 454: V_{REF}

Pin 455: V_{FB}

Pin 456: V_{OUT}

Pin 457: GND

Pin 458: V_{IN}

Pin 459: V_{FB}

Pin 460: V_{OUT}

Pin 461: GND

Pin 462: V_{REF}

Pin 463: V_{FB}

Pin 464: V_{OUT}

Pin 465: GND

Pin 466: V_{IN}

Pin 467: V_{FB}

Pin 468: V_{OUT}

Pin 469: GND

Pin 470: V_{REF}

Pin 471: V_{FB}

Pin 472: V_{OUT}

Pin 473: GND

Pin 474: V_{IN}

Pin 475: V_{FB}

Pin 476: V_{OUT}

Pin 477: GND

Pin 478: V_{REF}

Pin 479: V_{FB}

Pin 480: V_{OUT}

Pin 481: GND

Pin 482: V_{IN}

Pin 483: V_{FB}

Pin 484: V_{OUT}

Pin 485: GND

Pin 486: V_{REF}

Pin 487: V_{FB}

Pin 488: V_{OUT}

Pin 489: GND

Pin 490: V_{IN}

Pin 491: V_{FB}

Pin 492: V_{OUT}

Pin 493: GND

Pin 494: V_{REF}

Pin 495: V_{FB}

Pin 496: V_{OUT}

Pin 497: GND

Pin 498: V_{IN}

Pin 499: V_{FB}

Pin 500: V_{OUT}

Pin 501: GND

Pin 502: V_{REF}

Pin 503: V_{FB}

Pin 504: V_{OUT}

Pin 505: GND

Pin 506: V_{IN}

Pin 507: V_{FB}

Pin 508: V_{OUT}

Pin 509: GND

Pin 510: V_{REF}

Pin 511: V_{FB}

Pin 512: V_{OUT}

Pin 513: GND

Pin 514: V_{IN}

Pin 515: V_{FB}

Pin 516: V_{OUT}

Pin 517: GND

Pin 518: V_{REF}

Pin 519: V_{FB}

Pin 520: V_{OUT}

Pin 521: GND

Pin 522: V_{IN}

Pin 523: V_{FB}

Pin 524: V_{OUT}

Pin 525: GND

Pin 526: V_{REF}

Pin 527: V_{FB}

Pin 528: V_{OUT}

Pin 529: GND

Pin 530: V_{IN}

Pin 531: V_{FB}

Pin 532: V_{OUT}

Pin 533: GND

Pin 534: V_{REF}

Pin 535: V_{FB}

Pin 536: V_{OUT}

Pin 537: GND

Pin 538: V_{IN}

Pin 539: V_{FB}

Pin 540: V_{OUT}

Pin 541: GND

Pin 542: V_{REF}

Pin 543: V_{FB}

Pin 544: V_{OUT}

Pin 545: GND

Pin 546: V_{IN}

Pin 547: V_{FB}

Pin 548: V_{OUT}

Pin 549: GND

Pin 550: V_{REF}

Pin 551: V_{FB}

Pin 552: V_{OUT}

Pin 553: GND

Pin 554: V_{IN}

Pin 555: V_{FB}

Pin 556: V_{OUT}

Pin 557: GND

Pin 558: V_{REF}

Pin 559: V_{FB}

Pin 560: V_{OUT}

Pin 561: GND

Pin 562: V_{IN}

Pin 563: V_{FB}

Pin 564: V_{OUT}

Pin 565: GND

Pin 566: V_{REF}

Pin 567: V_{FB}

Pin 568: V_{OUT}

Pin 569: GND

Pin 570: V_{IN}

Pin 571: V_{FB}

Pin 572: V_{OUT}

Pin 573: GND

Pin 574: V_{REF}

Pin 575: V_{FB}

Pin 576: V_{OUT}

Pin 577: GND

Pin 578: V_{IN}

Pin 579: V_{FB}

Pin 580: V_{OUT}

Pin 581: GND

Pin 582: V_{REF}

Pin 583: V_{FB}

Pin 584: V_{OUT}

Pin 585: GND

Pin 586: V_{IN}

Pin 587: V_{FB}

Pin 588: V_{OUT}

Pin 589: GND

Pin 590: V_{REF}

Pin 591: V_{FB}

Pin 592: V_{OUT}

Pin 593: GND

Pin 594: V_{IN}

Pin 595: V_{FB}

Pin 596: V_{OUT}

Pin 597: GND

Pin 598: V_{REF}

Pin 599: V_{FB}

Pin 600: V_{OUT}

Pin 601: GND

Pin 602: V_{IN}

Pin 603: V_{FB}

Pin 604: V_{OUT}

Pin 605: GND

Pin 606: V_{REF}

Pin 607: V_{FB}

Pin 608: V_{OUT}

Pin 609: GND

Pin 610: V_{IN}

Pin 611: V_{FB}

Pin 612: V_{OUT}

Pin 613: GND

Pin 614: V_{REF}

Pin 615: V_{FB}

Pin 616: V_{OUT}

Pin 617: GND

Pin 618: V_{IN}

Pin 619: V_{FB}

Pin 620: V_{OUT}

Pin 621: GND

Pin 622: V_{REF}

Pin 623: V_{FB}

Pin 624: V_{OUT}

Pin 625: GND

Pin 626: V_{IN}

Pin 627: V_{FB}

Pin 628: V_{OUT}

Pin 629: GND

Pin 630: V_{REF}

Pin 631: V_{FB}

Pin 632: V_{OUT}

Pin 633: GND

Pin 634: V_{IN}

Pin 635: V_{FB}

Pin 636: V_{OUT}

Pin 637: GND

Pin 638: V_{REF}

Pin 639: V_{FB}

Pin 640: V_{OUT}

Pin 641: GND

Pin 642: V_{IN}

Pin 643: V_{FB}

Pin 644: V_{OUT}

Pin 645: GND

Pin 646: V_{REF}

Pin 647: V_{FB}

Pin 648: V_{OUT}

Pin 649: GND

Pin 650: V_{IN}

Pin 651: V_{FB}

Pin 652: V_{OUT}

Pin 653: GND

Pin 654: V_{REF}

Pin 655: V_{FB}

Pin 656: V_{OUT}

Pin 657: GND

Pin 658: V_{IN}

Pin 659: V_{FB}

Pin 660: V_{OUT}

Pin 661: GND

Pin 662: V_{REF}

Pin 663: V_{FB}

Pin 664: V_{OUT}

Pin 665: GND

Pin 666: V_{IN}

Pin 667: V_{FB}

Pin 668: V_{OUT}

Pin 669: GND

Pin 670: V_{REF}

Pin 671: V_{FB}

Pin 672: V_{OUT}

Pin 673: GND

Pin 674: V_{IN}

Pin 675: V_{FB}

Pin 676: V_{OUT}

Pin 677: GND

Pin 678: V_{REF}

Pin 679: V_{FB}

Pin 680: V_{OUT}

Pin 681: GND

Pin 682: V_{IN}

Pin 683: V_{FB}

Pin 684: V_{OUT}

Pin 685: GND

Pin 686: V_{REF}

Pin 687: V_{FB}

Pin 688: V_{OUT}

Pin 689: GND

Pin 690: V_{IN}

Pin 691: V_{FB}

Pin 692: V_{OUT}

Pin 693: GND

Pin 694: V_{REF}

Pin 695: V_{FB}

Pin 696: V_{OUT}

Pin 697: GND

Pin 698: V_{IN}

Pin 699: V_{FB}

Pin 700: V_{OUT}

Pin 701: GND

Pin 702: V_{REF}

Pin 703: V_{FB}

Pin 704: V

ELECTRICAL CHARACTERISTICS (continued)

$V_{IN} = 12\text{ V}$; $V_S = 16\text{ V}$; $V_{LOGIC} = 3.3\text{ V}$; $V_{GH1} = V_{GH2} = 30\text{ V}$; $V_{GL} = -7\text{ V}$; $T_A = -40^{\circ}\text{C}$ to 85°C ; typical values are at 25°C (unless otherwise noted).

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
BUCK CONVERTER						
V_{LOGIC}	Output voltage		3.2	3.3	3.4	V
I_{FBB}	Feedback input bias current	$V_{FBB} = 3.3\text{ V}$, sourcing (i.e. flowing out of IC).			125	μA
I_{LIM}	Switch current limit		1.5	2.1	2.8	A
I_{LKG}	Switch leakage current	$V_{SWB} = 0\text{ V}$			10	μA
$r_{DS(on)}$	Switch ON resistance			0.21		Ω
t_{SW}	Switching time	Turnon and turnoff		10		ns
	Line regulation	$V_{IN} = 9.6\text{ V}$ to 14.4 V , $I_{LOGIC} = 0.5\text{ A}$		0.01		%/V
	Load regulation	$I_{LOGIC} = 150\text{ mA}$ to 1.5 A		0.2		%/A
$V_{FB(SC)}$	Short-circuit threshold	V_{FBB} rising		1.065		V
V_{PG}	Power-good threshold	V_{LOGIC} rising		3.2		V
		V_{LOGIC} falling		2.9		
t_{SS}	Soft start time			0.66		ms
POSITIVE CHARGE PUMP CONTROLLER						
V_{FBP}	Feedback regulation voltage		1.203	1.24	1.277	V
I_{FBP}	Feedback input bias current	$V_{FBP} = 1.24\text{ V}$		± 10	± 100	nA
I_{CTRLP}	Base drive current for external transistor	Normal operation	5			mA
$I_{CTRLP(SC)}$	Base drive current for external transistor	Short-circuit operation	40	55	75	μA
	Line regulation	$V_{IN} = 9.6\text{ V}$ to 14.4 V , $V_{GH} = 27\text{ V}$, $I_{GH} = 50\text{ mA}$, including external components		± 0.1		%/V
	Load regulation	$V_{GH} = 27\text{ V}$, $I_{GH} = 0$ to 50 mA , including external components		± 1		%/A
NEGATIVE CHARGE PUMP CONTROLLER						
V_{FBN}	Feedback regulation voltage		-36	0	36	mV
I_{FBN}	Feedback input bias current	$V_{FBP} = 1.24\text{ V}$		± 10	± 100	nA
I_{CTRLN}	Base drive current for external transistor	Normal operation	2.5			mA
$I_{CTRLN(SC)}$	Base drive current for external transistor	Short-circuit operation	200	300	480	μA
	Line regulation	$V_{IN} = 9.6\text{ V}$ to 14.4 V , $V_{GL} = -7\text{ V}$, $I_{GL} = 50\text{ mA}$, including external components		± 0.1		%/V
	Load regulation	$V_{GL} = -7\text{ V}$, $I_{GH} = 0$ to 50 mA , including external components		± 1		%/A
RESET GENERATOR						
V_{OL}	Output voltage low	$I_{OL} = 1\text{ mA}$ (sinking)			0.5	V
I_{OH}	Output current high	$V_{RST} = 3.3\text{ V}$			± 1	μA
I_{CRST}	Reset delay capacitor charge current			10		μA
V_{CRST}	Reset delay threshold voltage			1.24		V
DELAY						
I_{DLY}	Delay capacitor charge current			10		μA
V_{DLY}	Delay threshold voltage			1.24		V
THERMAL SHUTDOWN						
T_{SD}	Thermal shutdown threshold			150		$^{\circ}\text{C}$
T_{HYS}	Thermal shutdown hysteresis			10		$^{\circ}\text{C}$


ELECTRICAL CHARACTERISTICS (continued)

$V_{IN} = 12\text{ V}$; $V_S = 16\text{ V}$; $V_{LOGIC} = 3.3\text{ V}$; $V_{GH1} = V_{GH2} = 30\text{ V}$; $V_{GL} = -7\text{ V}$; $T_A = -40^{\circ}\text{C}$ to 85°C ; typical values are at 25°C (unless otherwise noted).

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
POWER SUPPLY						
I _{GH1}	V _{GH1} supply current	IN1 to IN7 = V _{SENSE} = 0 V		0.35	3	mA
I _{GH2}	V _{GH2} supply current	IN8 and IN9 = 0V		0.012	1	mA
I _{GL}	V _{GL} supply current	IN1 to IN9 = V _{SENSE} = 0 V		0.144	4	mA
UVLO	Undervoltage lockout threshold (V _{GH1})	V _{GH1} rising	10.5		13.5	V
V _{HYS}	Undervoltage lockout hysteresis (V _{GH1})	V _{GH1} falling		450		mV
LEVEL SHIFTERS						
I _{OUT}	Output current	OUT1 to OUT7, continuous	±15			mA
		OUT1 to OUT7, peak	±300			
		OUT8 to OUT9, DISCGARGE, continuous	±15			
		OUT8 to OUT9, DISCHARGE, peak	±150			
I _{IN}	Input current	IN1 to IN9 = 0 V			±1	µA
		IN1 to IN9 = 3.3 V			±1	µA
V _{IH}	High level input threshold	IN1 to IN9			2	V
V _{IL}	Low level input threshold	IN1 to IN9	0.5			V
V _{DROPL}	Output voltage drop low	OUT1 to OUT7, I _{OUT} = −10 mA (sinking)	0.1	0.3		V
		OUT8 to OUT9, DISCHARGE, I _{OUT} = −10 mA (sinking)		0.2	1	
V _{DROPH}	Output voltage drop high	OUT1 to OUT7, I _{OUT} = 10 mA (sourcing)		0.15	0.4	V
		OUT8 to OUT9, DISCHARGE, I _{OUT} = 10 mA (sourcing)		0.35	1	V
t _R	Rise time	OUT1 to OUT7, C _{OUT} = 4.7 nF		300	520	ns
		OUT8 to OUT9, C _{OUT} = 4.7 nF		800	1200	
t _F	Fall time	OUT1 to OUT7, C _{OUT} = 4.7 nF		200	370	ns
		OUT8 to OUT9, C _{OUT} = 4.7 nF		500	850	
t _{PH}	Propagation delay	Rising edge, C _{OUT} = 150 pF			60	ns
t _{PL}		Falling edge, C _{OUT} = 150 pF			60	
GATE VOLTAGE SHAPING						
t _{PH}	Propagation delay, gate voltage shaping enabled	FLK falling			100	ns
t _{SU}	Set-up time	Time IN signals must be stable before falling edge of FLK			70	ns
r _{DS(on)}	Resistance between OUT and RE pins			60	100	Ω
I _{lkg}	Leakage current from RE pin			±1	±10	µA
DISCHARGE						
V _{SENSE}	Discharge voltage sense threshold	V _{SENSE} falling	1.275	1.5	1.725	V
I _{SENSE}	Discharge voltage sense current	V _{SENSE} = 2V		±0.1	±1	µA
V _{HYS}	Discharge voltage sense hysteresis	V _{SENSE} rising		50		mV

DEVICE INFORMATION

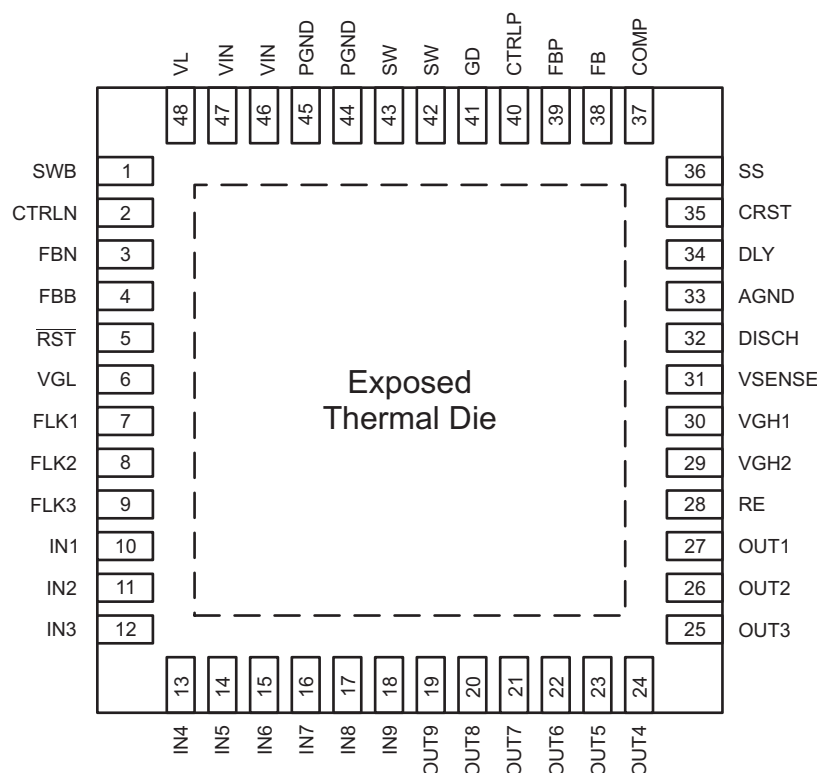PIN ASSIGNMENT



PIN FUNCTIONS

PIN		I/O	DESCRIPTION
NAME	NO.		
AGND	33	P	Analog ground
BOOT	48	I	Buck converter bootstrap capacitor connection
COMP	37	I	Boost converter compensation network connection.
CRST	35	I	Reset generator timing capacitor connection.
CTRLN	2	O	Base drive signal for an external transistor positive linear regulator
CTRLP	40	O	Base drive signal for an external transistor negative linear regulator
DISCH	32	I	Panel discharging connection
DLY	34	I	Positive charge pump and boost converter delay capacitor connection
FB	38	I	Boost regulator feedback. Connect this pin to the center of a resistor divider connected between the boost converter output and AGND.
FBB	4	I	Buck converter feedback connection
FBN	3	I	Feedback pin for an external transistor positive linear regulator
FBP	39	I	Feedback pin for an external transistor negative linear regulator
FLK1	7	I	Flicker clock for level-shifter channels 1 and 4
FLK2	8	I	Flicker clock for level-shifter channels 2 and 5
FLK3	9	I	Flicker clock for level-shifter channels 3 and 6
GD	41	O	Gate drive signal for the external MOSFET isolation switch
IN1–IN7	10, 11, 12, 13, 14, 15, 16	I	Inputs for level-shifter channels 1 through 7 (connected to VGH1)
IN8–IN9	17, 18	I	Inputs for level-shifter channels 8 and 9 (connected to VGH2)

PIN FUNCTIONS (continued)

PIN		I/O	DESCRIPTION
NAME	NO.		
OUT7–OUT1	21, 22, 23, 24, 25, 26, 27	O	Outputs for level-shifter channels 1 through 7 (connected to VGH1)
OUT9–OUT8	19, 20	O	Outputs for level-shifter channels 8 and 9 (connected to VGH2)
PGND	44, 45	P	Power ground
RE	28	O	Gate shaping slope resistor connection
$\overline{\text{RST}}$	5	O	Reset generator open-drain output
SS	36	I	Soft-start timing-capacitor connection.
SW	42, 43	O	Boost converter switching node
SWB	1	O	Buck converter switch node
VGH1	30	P	Positive supply voltage for level-shifter channels 1 through 7
VGH2	29	P	Positive supply voltage for level-shifter channels 8 and 9
VGL	6	P	Negative supply voltage for level-shifter channels 1 through 9
VIN	46, 47	P	Supply-voltage connection
VSENSE	31	I	Discharge sense voltage
Exposed thermal die		P	Connect to the system GND

TYPICAL CHARACTERISTICS

TABLE OF GRAPHS

		FIGURE NO.
BOOST CONVERTER		
Efficiency		Figure 1
Load Transient Response	$V_{IN} = 12\text{ V}$, $V_S = 15.5\text{ V}$, $I_S = 250\text{ mA}$ to 750 mA	Figure 2
Line Transient Response	$V_{IN} = 11.5\text{ V}$ to 12.5 V , $V_S = 15.5\text{ V}$, $I_S = 750\text{ mA}$	Figure 3
Output Voltage Ripple	$V_{IN} = 12\text{ V}$, $V_S = 15.5\text{ V}$, $I_S = 500\text{ mA}$	Figure 4
Switch Node (SW) Waveform	CCM Operation	Figure 5
	DCM Operation	Figure 5
BUCK CONVERTER		
Efficiency		Figure 7
Load Transient Response	$V_{IN} = 12\text{ V}$, $V_{LOGIC} = 3.3\text{ V}$, $I_{LOGIC} = 250\text{ mA}$ to 500 mA	Figure 8
Line Transient Response	$V_{IN} = 11.5\text{ V}$ to 12.5 V , $V_{LOGIC} = 3.3\text{ V}$, $I_{LOGIC} = 500\text{ mA}$	Figure 9
Output Voltage Ripple	$V_{IN} = 12\text{ V}$, $V_{LOGIC} = 3.3\text{ V}$, $I_{LOGIC} = 500\text{ mA}$	Figure 10
Switch Node (SW) Waveform	CCM Operation	Figure 11
	DCM Operation	Figure 12
	Skip Mode	Figure 13
POSITIVE CHARGE PUMP		
Load Transient Response	$V_{IN} = 12\text{ V}$, $V_{GH} = 26\text{ V}$, $I_{GH} = 10\text{ mA}$ to 50 mA	Figure 14
Line Transient Response	$V_{IN} = 11.5\text{ V}$ to 12.5 V , $V_{GH} = 26\text{ V}$, $I_{GH} = 50\text{ mA}$	Figure 15
Output Voltage Ripple	$V_{IN} = 12\text{ V}$, $V_{GH} = 26\text{ V}$, $I_{GH} = 50\text{ mA}$	Figure 16
NEGATIVE CHARGE PUMP		
Load Transient Response	$V_{IN} = 12\text{ V}$, $V_{GL} = -7\text{ V}$, $I_{GL} = 10\text{ mA}$ to 50 mA	Figure 17
Line Transient Response	$V_{IN} = 11.5\text{ V}$ to 12.5 V , $V_{GL} = -7\text{ V}$, $I_{GL} = 50\text{ mA}$	Figure 18
Output Voltage Ripple	$V_{IN} = 12\text{ V}$, $V_{GL} = -7\text{ V}$, $I_{GL} = 50\text{ mA}$	Figure 19
START-UP SEQUENCING		
Power-Up Sequencing	$C_{DLY} = 100\text{ nF}$	Figure 20
Reset Sequencing	$C_{DLY} = 100\text{ nF}$, $C_{RST} = 22\text{ nF}$	Figure 21
LEVEL SHIFTERS		
Output Rise and Fall Time	Channels 1–7, $C_L = 4.7\text{ nF}$, rising edge	Figure 22
	Channels 1–7, $C_L = 4.7\text{ nF}$, falling edge	Figure 23
	Channels 8–9, $C_L = 4.7\text{ nF}$, rising edge	Figure 24
	Channels 8–9, $C_L = 4.7\text{ nF}$, falling edge	Figure 25
	Channels 1–7, $R_L = 47\text{ }\Omega$, $C_L = 10\text{ nF}$, rising edge	Figure 26
	Channels 1–7, $R_L = 47\text{ }\Omega$, $C_L = 10\text{ nF}$, falling edge	Figure 27
Propagation Delay	IN to OUT, channels 1–7, $C_L = 150\text{ pF}$, rising edge	Figure 28
	IN to OUT, channels 1–7, $C_L = 150\text{ pF}$, falling edge	Figure 29
	IN to OUT, channels 8–9, $C_L = 150\text{ pF}$, rising edge	Figure 30
	IN to OUT, channels 8–9, $C_L = 150\text{ pF}$, falling edge	Figure 31
	FLK-RE, channels 1–6, $C_L = 150\text{ pF}$, $R_E = 1\text{ k}\Omega$	Figure 32
Output Current	Channels 1–7, $C_L = 10\text{ nF}$	Figure 33
	Channels 8–9, $C_L = 10\text{ nF}$	Figure 34
Panel Discharge	Power on	Figure 35
	Power off	Figure 36

BOOST CONVERTER EFFICIENCY

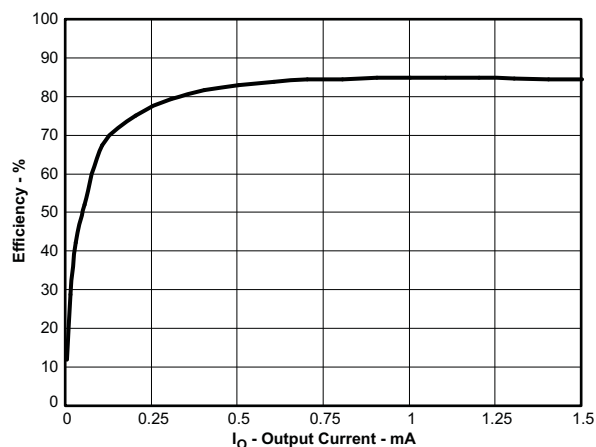


Figure 1.

BOOST CONVERTER LOAD TRANSIENT RESPONSE $I_S = 250 \text{ mA TO } 750 \text{ mA}$

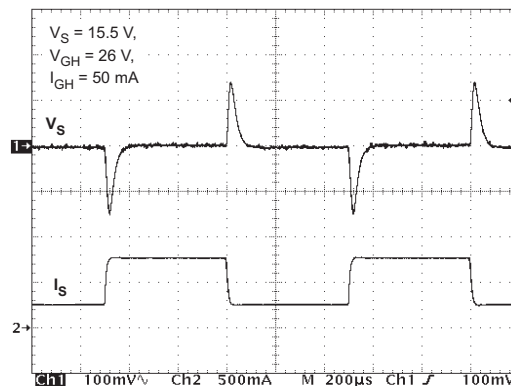


Figure 2.

BOOST CONVERTER LINE TRANSIENT RESPONSE $V_{IN} = 11.5 \text{ V TO } 12.5 \text{ V}$

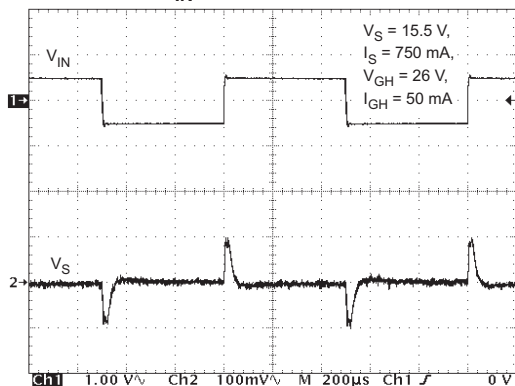


Figure 3.

BOOST CONVERTER OUTPUT VOLTAGE RIPPLE $I_S = 500 \text{ mA}$

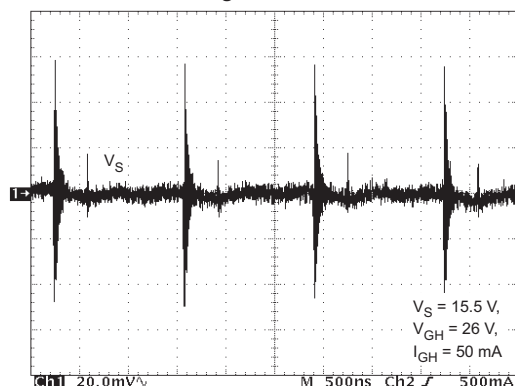


Figure 4.

BOOST CONVERTER SWITCH NODE WAVEFORM CONTINUOUS CONDUCTION MODE

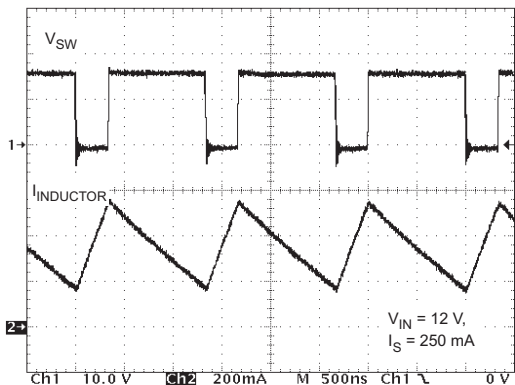


Figure 5.

BOOST CONVERTER SWITCH NODE WAVEFORM DISCONTINUOUS CONDUCTION MODE

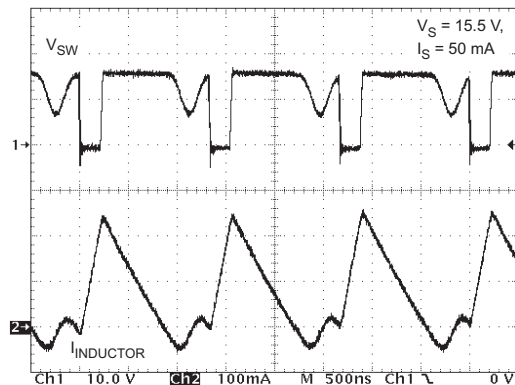


Figure 6.

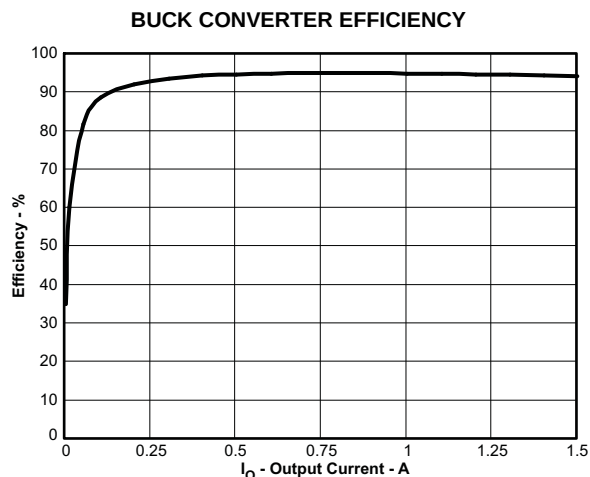


Figure 7.

BUCK CONVERTER LOAD TRANSIENT RESPONSE
 $I_{\text{LOGIC}} = 250\text{mA TO } 500\text{mA}$

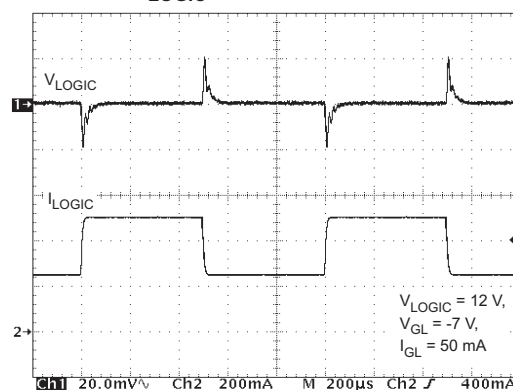


Figure 8.

BUCK CONVERTER LINE TRANSIENT RESPONSE
 $V_{\text{IN}} = 11.5\text{ V TO } 12.5\text{ V}$

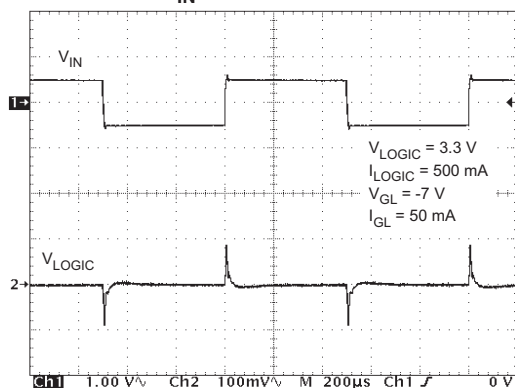


Figure 9.

BUCK CONVERTER OUTPUT VOLTAGE RIPPLE
 $I_{\text{LOGIC}} = 500\text{ mA}$

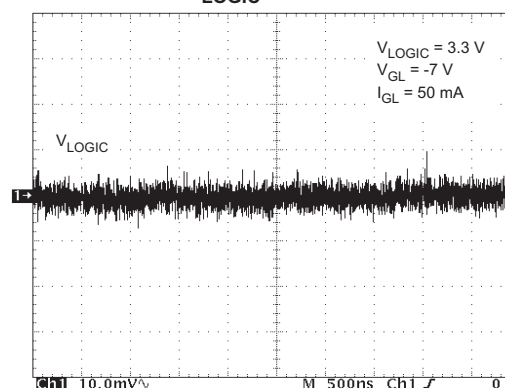


Figure 10.

BUCK CONVERTER SWITCH NODE WAVEFORM
CONTINUOUS CONDUCTION MODE

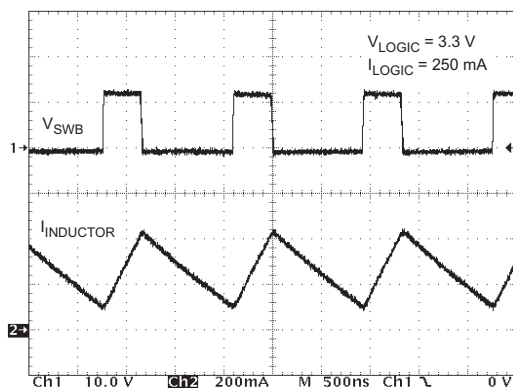


Figure 11.

BUCK CONVERTER SWITCH NODE WAVEFORM
DISCONTINUOUS CONDUCTION MODE

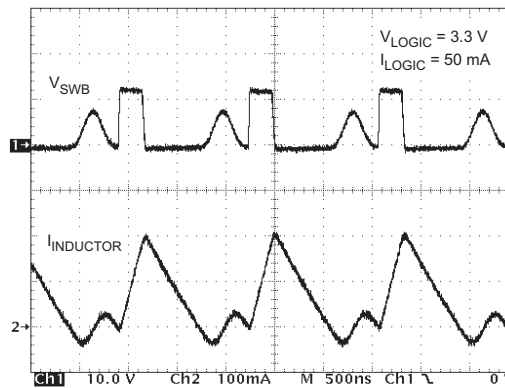


Figure 12.

**BUCK CONVERTER SWITCH WAVEFORM
SKIP MODE**

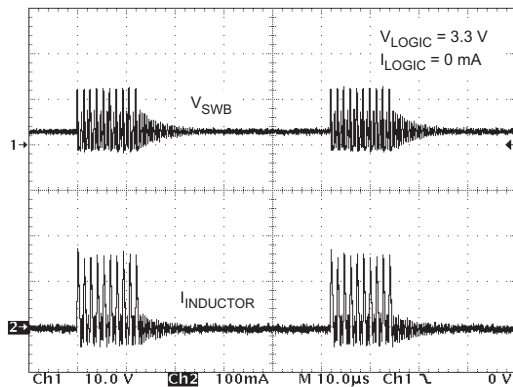


Figure 13.

**POSITIVE CHARGE PUMP LOAD TRANSIENT RESPONSE
 $I_{GH} = 10 \text{ mA to } 50 \text{ mA}$**

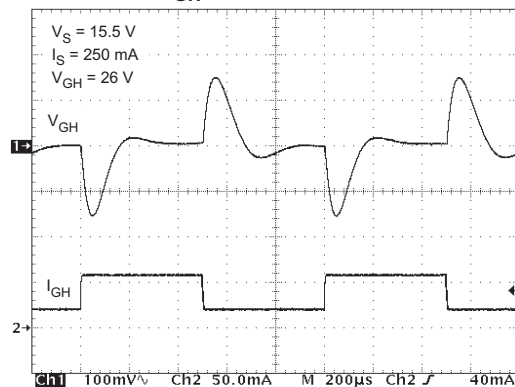


Figure 14.

**POSITIVE CHARGE PUMP LINE TRANSIENT RESPONSE
 $V_{IN} = 11.5 \text{ V TO } 12.5 \text{ V}$**

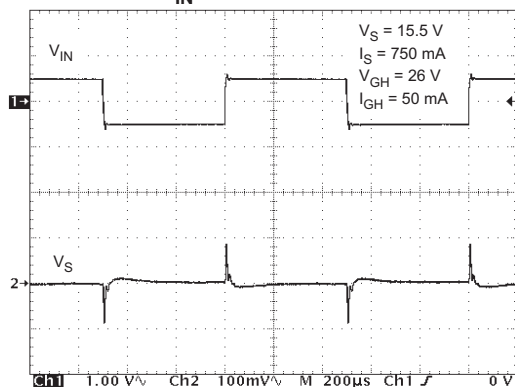


Figure 15.

**POSITIVE CHARGE PUMP OUTPUT VOLTAGE RIPPLE
 $I_{GH} = 50 \text{ mA}$**

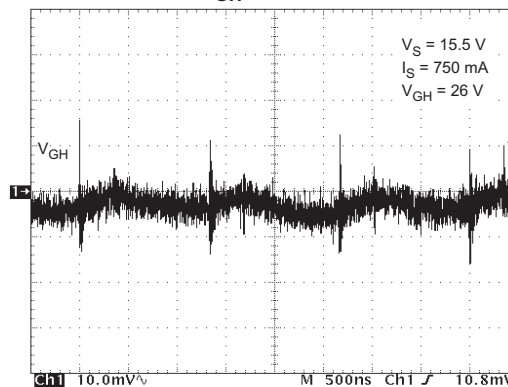


Figure 16.

**NEGATIVE CHARGE PUMP LOAD TRANSIENT RESPONSE
 $I_{GL} = 10 \text{ mA to } 50 \text{ mA}$**

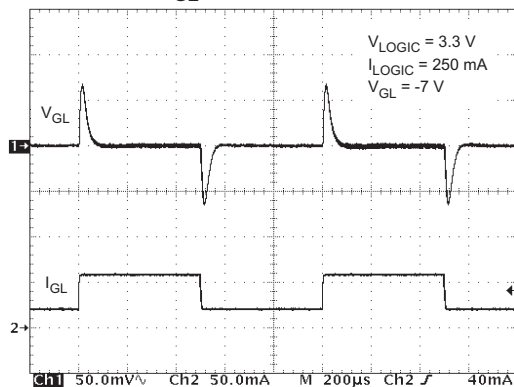


Figure 17.

**NEGATIVE CHARGE PUMP LINE TRANSIENT RESPONSE
 $V_{IN} = 11.5 \text{ V to } 12.5 \text{ V}$**

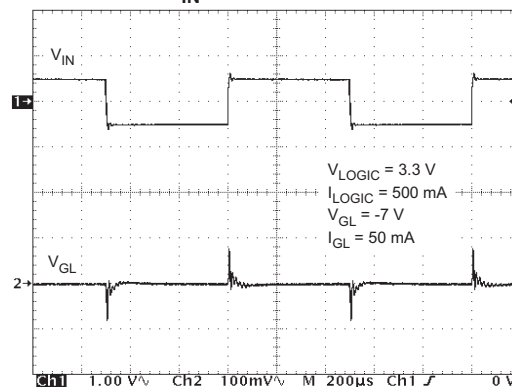


Figure 18.

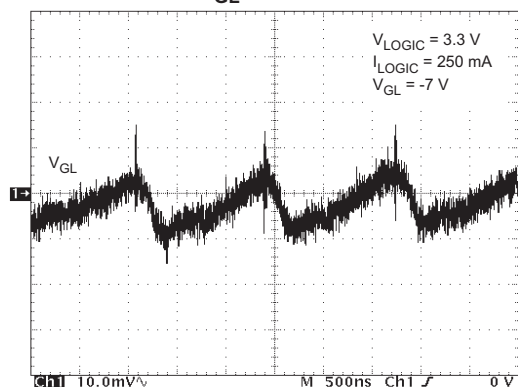
NEGATIVE CHARGE PUMP OUTPUT VOLTAGE RIPPLE
 $I_{GL} = 50 \text{ mA}$


Figure 19.

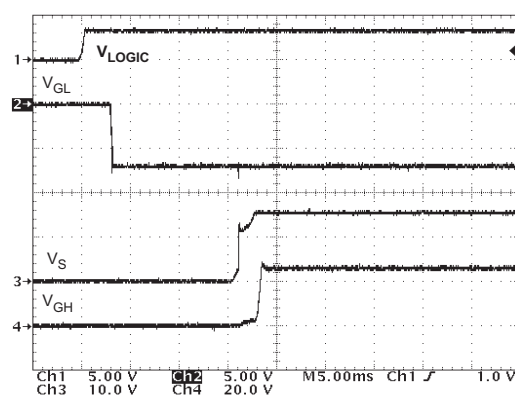
POWER-UP SEQUENCING


Figure 20.

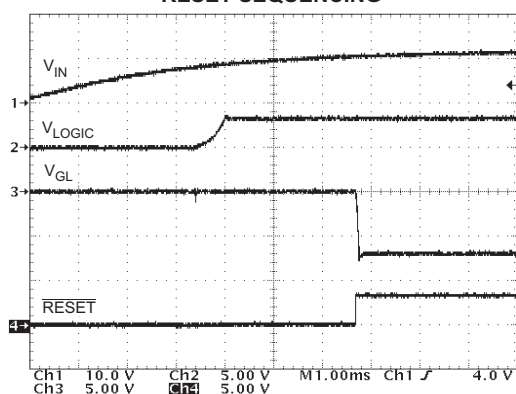
RESET SEQUENCING


Figure 21.

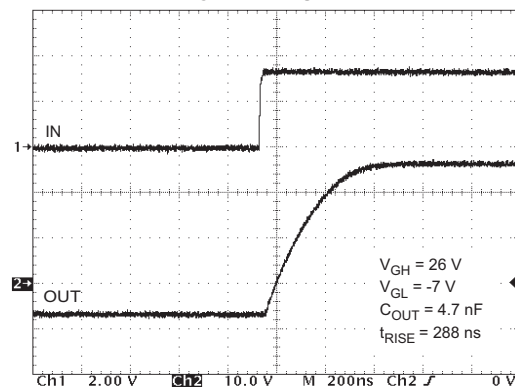
LEVEL SHIFTER OUTPUT RISE TIME
CHANNELS 1-7


Figure 22.


LEVEL SHIFTER OUTPUT FALL TIME
CHANNELS 1-7

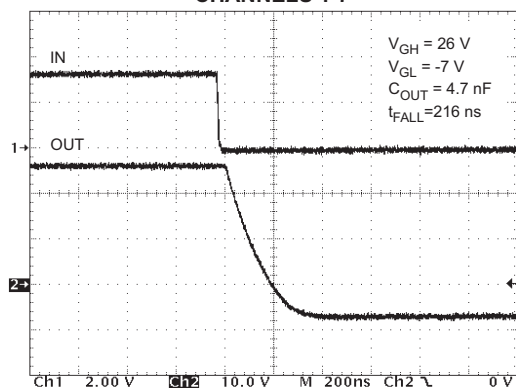
Figure 23.

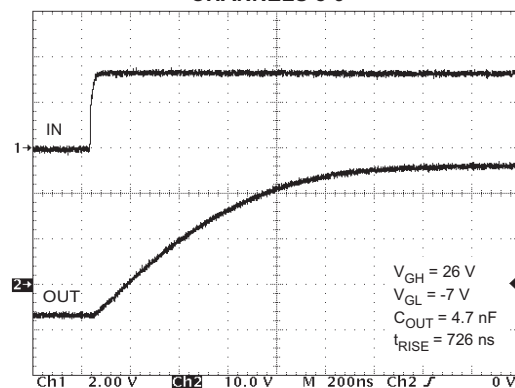
LEVEL SHIFTER OUTPUT RISE TIME
CHANNELS 8-9


Figure 24.

**LEVEL SHIFTER OUTPUT FALL TIME
CHANNELS 8-9**

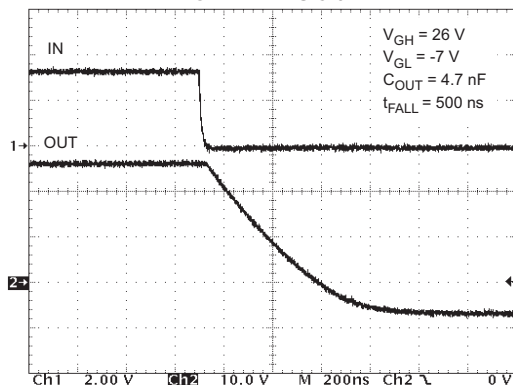


Figure 25.

**LEVEL SHIFTER OUTPUT RISE TIME
CHANNELS 1-7**

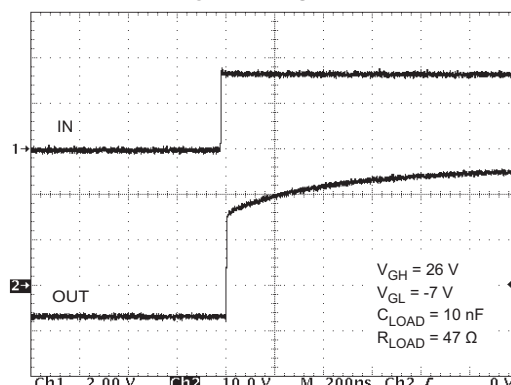


Figure 26.

**LEVEL SHIFTER OUTPUT FALL TIME
CHANNELS 1-7**

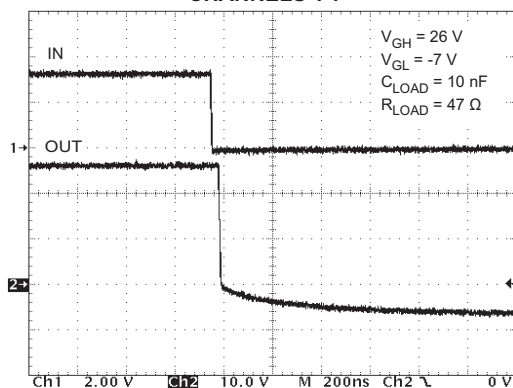


Figure 27.

**LEVEL SHIFTER PROPAGATION DELAY
IN-OUT, LOW-HIGH, CHANNELS 1-7**

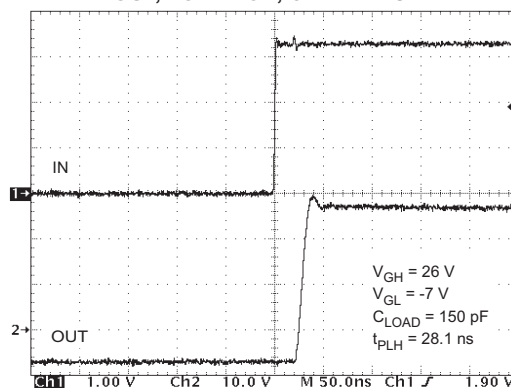


Figure 28.

**LEVEL SHIFTER PROPAGATION DELAY
IN-OUT, HIGH-LOW, CHANNELS 1-7**

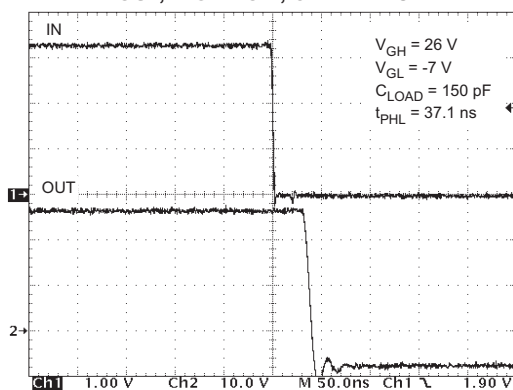


Figure 29.

**LEVEL SHIFTER PROPAGATION DELAY
IN-OUT, LOW-HIGH, CHANNELS 8-9**

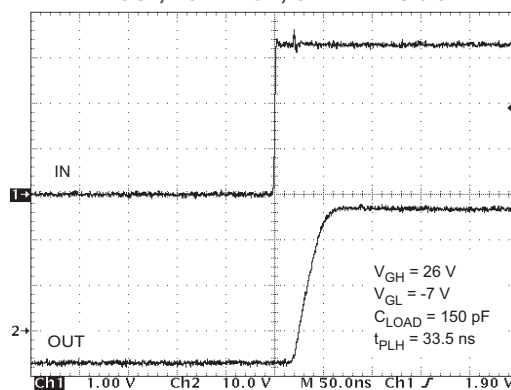
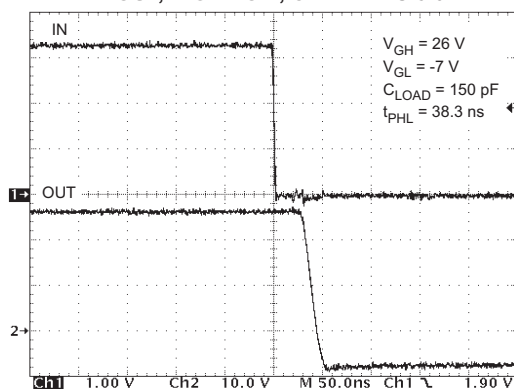
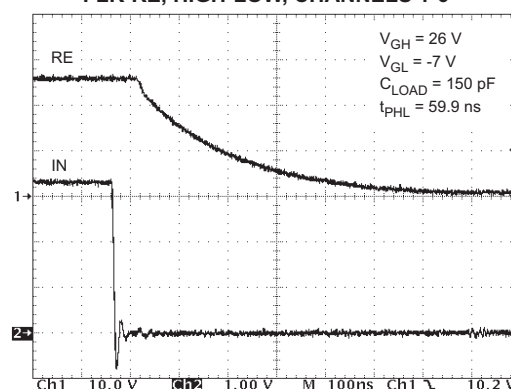
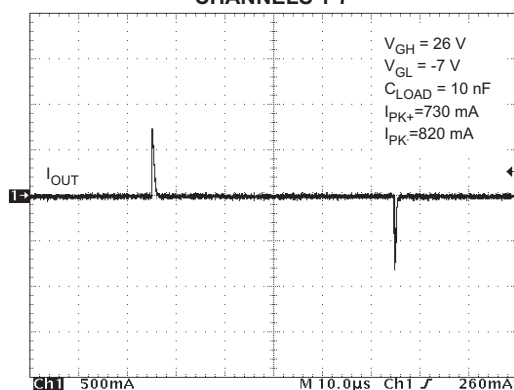
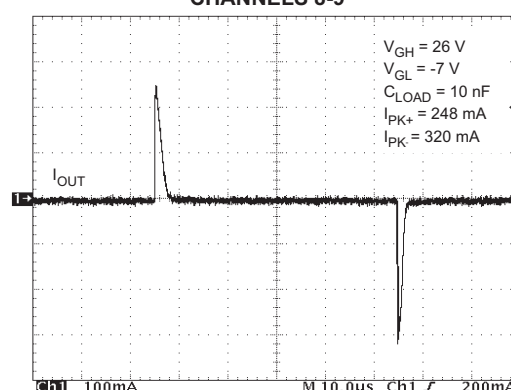
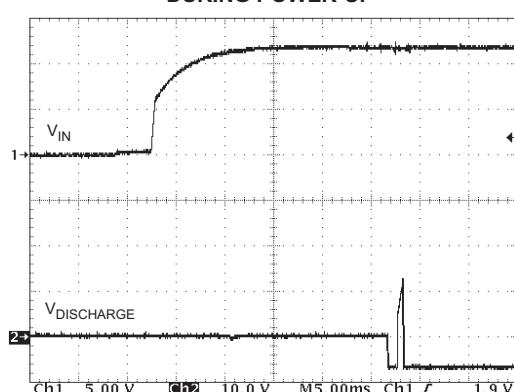
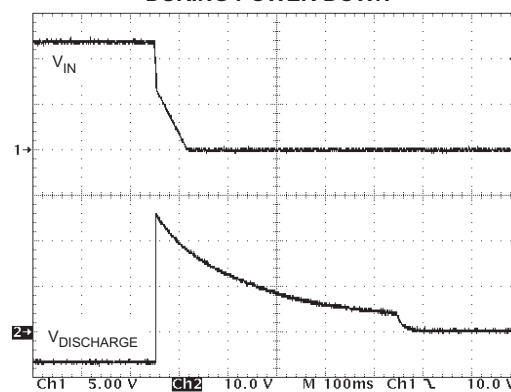


Figure 30.

**LEVEL SHIFTER PROPAGATION DELAY
IN-OUT, HIGH-LOW, CHANNELS 8-9**

Figure 31.
**LEVEL SHIFTER PROPAGATION DELAY
FLK-RE, HIGH-LOW, CHANNELS 1-6**

Figure 32.
**LEVEL SHIFTER OUTPUT CURRENT
CHANNELS 1-7**

Figure 33.
**LEVEL SHIFTER OUTPUT CURRENT
CHANNELS 8-9**

Figure 34.
**LEVEL SHIFTER DISCHARGE
DURING POWER-UP**

Figure 35.
**LEVEL SHIFTER DISCHARGE
DURING POWER-DOWN**

Figure 36.

DETAILED DESCRIPTION

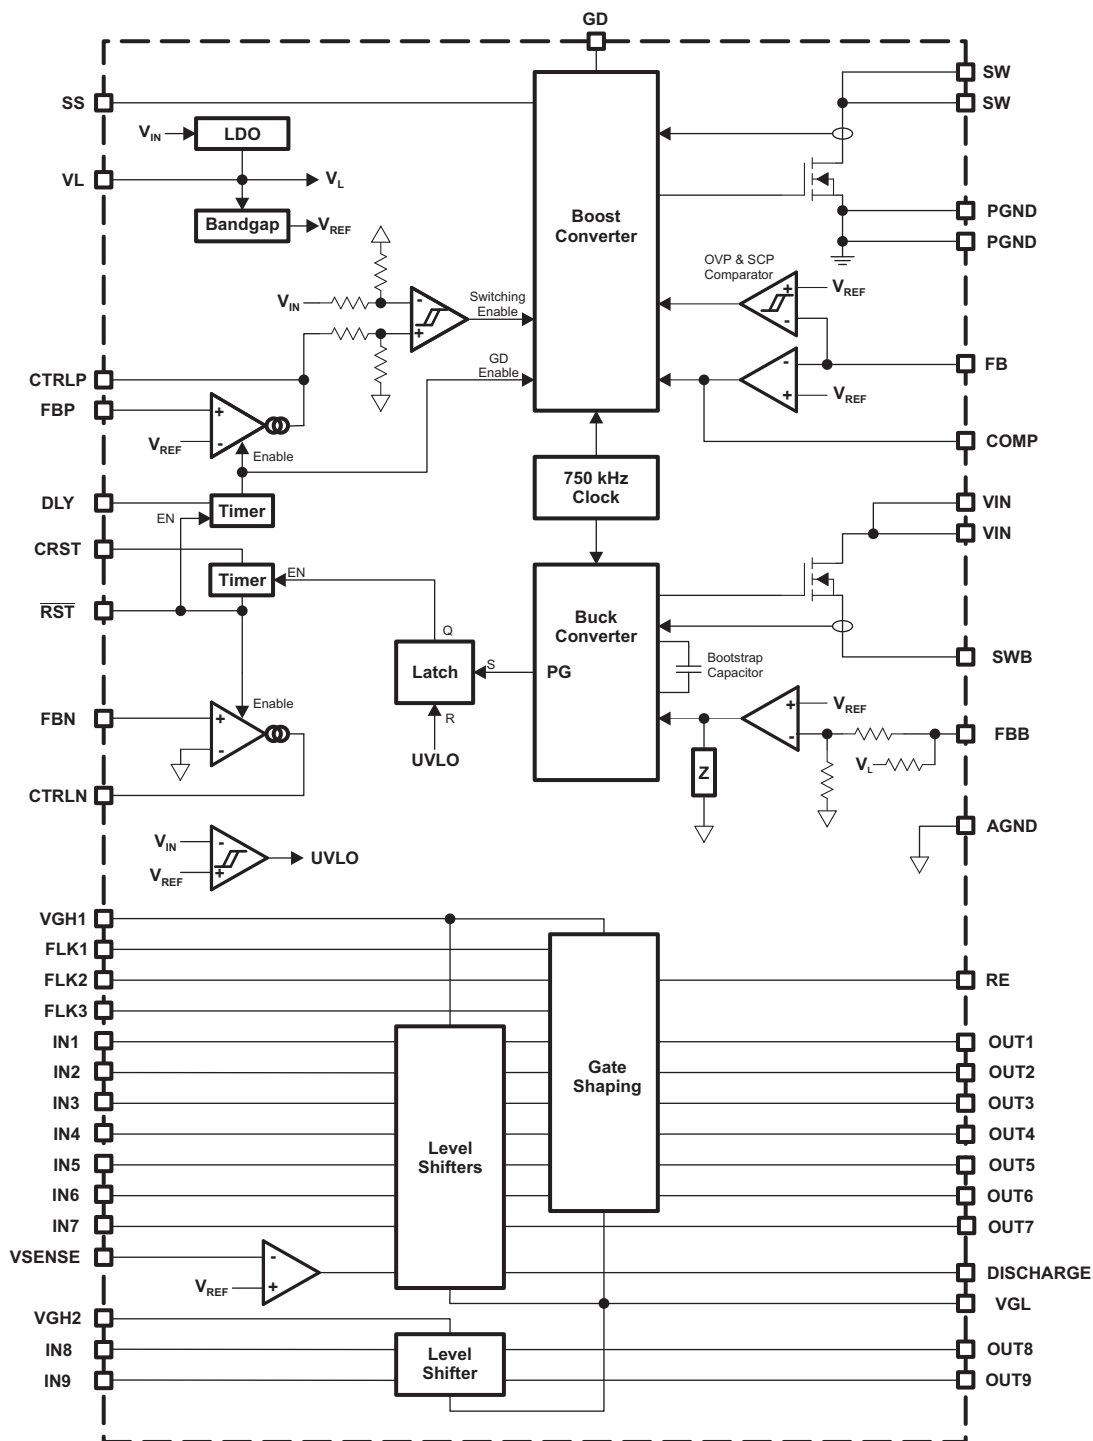


Figure 37. TPS65163 Internal Block Diagram

BOOST CONVERTER

The non-synchronous boost converter uses a current-mode topology and operates at a fixed frequency of 750 kHz. The internal block diagram of the boost converter is shown in Figure 38, and a typical application circuit in Figure 39. External compensation allows designers to optimize performance for individual applications, and is easily implemented by connecting a suitable capacitor/resistor network between the COMP pin and AGND (see the [Boost Converter Design Procedure](#) section for more details). The boost converter also controls a GD pin that can be used to drive an external isolation MOSFET.

The boost converter can operate in either continuous conduction mode (CCM) or discontinuous conduction mode (DCM), depending on the load current. At medium and high load currents, the inductor current is always greater than zero and the converter operates in CCM; at low load currents, the inductor current is zero during part of each switching cycle, and the converter operates in DCM. The switch node waveforms for CCM and DCM operation are shown in Figure 5 and Figure 6. Note that the ringing seen during DCM operation occurs because of parasitic capacitance in the PCB layout and is quite normal for DCM operation. There is very little energy contained in the ringing waveform and it does not significantly affect EMI performance.

Equation 1 can be used to calculate the load current below which the boost converter operates in DCM.

$$I_{DCM} = \frac{(V_S - V_{IN})}{2 \times L \times f_{SW}} \times \frac{V_{IN}}{V_{OUT}} \quad (1)$$

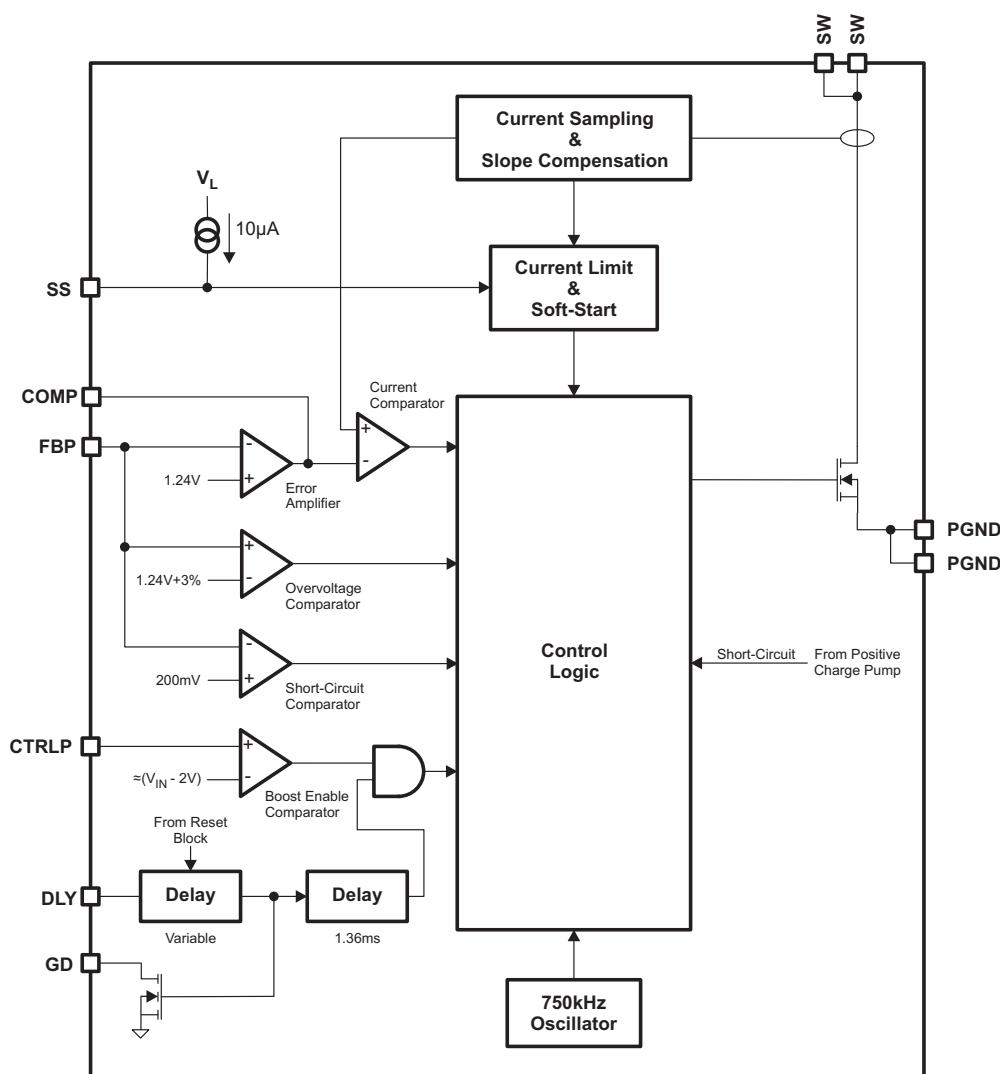


Figure 38. Boost Converter Internal Block Diagram

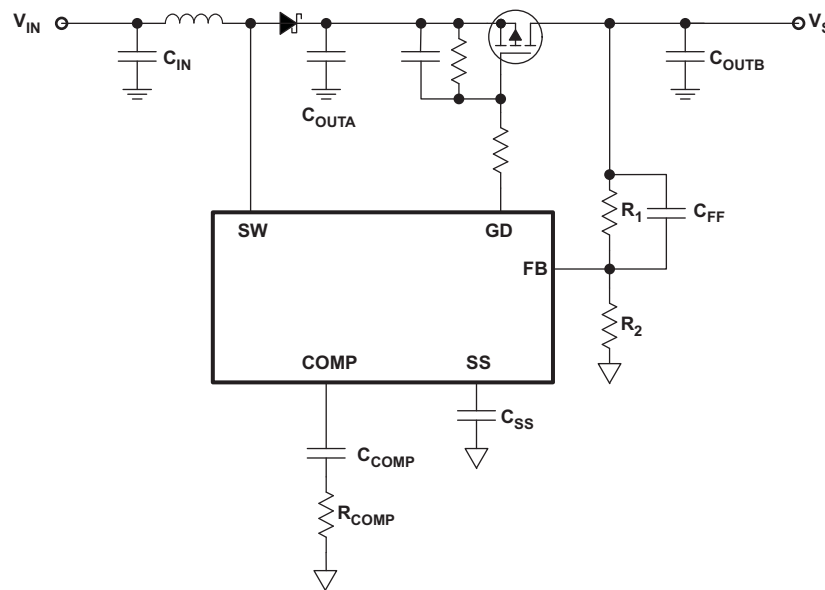


Figure 39. Boost Converter Typical Application Circuit

PROTECTION (BOOST CONVERTER)

The boost converter is protected against potentially damaging conditions such as overvoltage and short circuits. An error condition is detected if the voltage on the converter's FB pin remains below 200 mV for longer than 1.36 ms, in which case the converter stops switching and is latched in the OFF condition. To resume normal operation, the TPS65163 must be turned off and then turned on again.

Note: Because the positive charge pump is driven from its switch node, an error condition on the boost converter output also causes the loss of V_{GH} until the circuit recovers.

The boost converter also stops switching while the positive charge pump is in a short-circuit condition. This condition is not latched, however, and the boost converter automatically resumes normal operation once the short-circuit condition has been removed from the positive charge pump.

BOOST CONVERTER DESIGN PROCEDURE

Calculate Converter Duty Cycle (Boost Converter)

The simplest way to calculate the boost converter duty cycle is to use the efficiency curve in Figure 1 to determine the converter efficiency under the anticipated load conditions and insert this value into Equation 2⁽¹⁾. Alternatively, a worst-case value (e.g., 90%) can be used for efficiency.

$$D = 1 - \frac{V_{IN} \times \eta}{V_S} \quad (2)$$

(1) Valid only when boost converter operates in CCM.

where V_S is the output voltage of the boost converter.

Calculate Maximum Output Current (Boost Converter)

The maximum output current I_S that the boost converter can supply can be calculated using Equation 3. The minimum specified output current occurs at the maximum duty cycle (which occurs at minimum V_{IN}) and minimum frequency (600 kHz).

$$I_S = \left(I_{LIM} - \frac{V_{IN} \times D}{2 \times f_{SW} \times L} \right) \times (1 - D) \quad (3)$$

where I_{LIM} is the minimum specified switch current limit (2.8 A) and f_{SW} is the converter switching frequency.

Calculate Peak Switch Current (Boost Converter)

Equation 4 can be used to calculate the peak switch current occurring in a given application. The worst-case (maximum) peak current occurs at the minimum input voltage and maximum duty cycle.

$$I_{SW(PK)} = \frac{I_S}{1 - D} + \frac{V_{IN} \times D}{2 \times f_{SW} \times L} \quad (4)$$

Inductor Selection (Boost Converter)

The boost converter is designed for use with inductors in the range 6.8 μ H to 15 μ H. A 10- μ H inductor is typical. Inductors should be capable of supporting at least 125% of the peak current calculated by Equation 4 without saturating. This ensures sufficient margin to tolerate heavy load transients. Alternatively, a more conservative approach can be used in which an inductor is selected whose saturation current is greater than the maximum switch current limit (4.2 A).

Another important parameter is dc resistance, which can significantly affect the overall converter efficiency. Physically larger inductors tend to have lower dc resistance (DCR) because they can use thicker wire. The type and core material of the inductor can also affect efficiency, sometimes by as much as 10%. Table 1 shows some suitable inductors.

Table 1. Boost Converter Inductor Selection

PART NUMBER	INDUCTOR VALUE	COMPONENT SUPPLIER	SIZE (L×W×H, mm)	I _{SAT} / DCR
CDRH8D43	10 μ H	Sumida	8.3 × 8.3 × 4.5	4 A / 29 m Ω
CDRH8D38	10 μ H	Sumida	8.3 × 8.3 × 4	3 A / 38 m Ω
MSS 1048-103	10 μ H	Coilcraft	10.5 × 10.5 × 5.1	4.8 A / 26 m Ω
744066100	10 μ H	Wuerth	10 × 10 × 3.8	4 A / 28 m Ω

Rectifier Diode Selection (Boost Converter)

For highest efficiency, the rectifier diode should be a Schottky type. Its reverse voltage rating should be higher than the maximum output voltage V_S . The average rectified forward current through the diode is the same as the output current.

$$I_{D(AVG)} = I_S \quad (5)$$

A Schottky diode with a 2-A average rectified current rating is adequate for most applications. Smaller diodes can be used in applications with lower output current; however, the diode must be able to handle the power dissipated in it, which can be calculated using Equation 6. Table 2 lists some diodes suitable for use in typical applications.

$$P_D = I_{D(AVG)} \times V_F \quad (6)$$

Table 2. Boost Converter Rectifier Diode Selection

PART NUMBER	V _R / I _{AVG}	V _F	R _{θJA}	SIZE	COMPONENT SUPPLIER
MBRS320	20 V / 3 A	0.44 V at 3 A	46°C/W	SMC	International Rectifier
SL22	20 V / 2 A	0.44 V at 2 A	75°C/W	SMB	Vishay Semiconductor
SS22	20 V / 2 A	0.5 V at 2 A	75°C/W	SMB	Fairchild Semiconductor

Output Capacitance Selection (Boost Converter)

For best performance, a total output capacitance ($C_{OUTA} + C_{OUTB}$ in Figure 39) in the range 50 μ F to 100 μ F is recommended. At least 20 μ F of the total output capacitance should be connected directly to the cathode of the boost converter rectifier diode, i.e., in front of the isolation switch.

Operating the boost converter with little or no capacitance in front of the isolation switch may cause overvoltage conditions that reduce reliability of the TPS65163.

Table 3 suggests some output capacitors suitable for use with the boost converter.

Table 3. Boost Converter Output Capacitor Selection

PART NUMBER	VALUE / VOLTAGE RATING	COMPONENT SUPPLIER
GRM32ER61E226KE15	22 μ F / 25 V	Murata
GRM31CR61E106KA12	10 μ F / 25 V	Murata
UMK325BJ106MM	10 μ F / 50 V	Taiyo Yuden

Setting the Output Voltage (Boost Converter)

The boost converter output voltage is programmed by a resistor divider according to [Equation 7](#).

$$V_S = V_{REF} \times \left(1 + \frac{R_1}{R_2}\right) \quad (7)$$

where V_{REF} is the internal 1.24-V reference of the IC.

A current of the order of 100 μ A through the resistor network ensures good accuracy and improves noise immunity. A good approach is to assume a value of about 12 k Ω for the lower resistor (R_2) and then select the upper resistor (R_1) to set the desired output voltage.

Compensation (Boost Converter)

Boost converter external compensation can be fine-tuned for each individual application. Recommended starting values are 33 k Ω and 1 nF, which introduce a pole at the origin for high dc gain and a zero for good transient response. The frequency of the zero set by the compensation components can be calculated using [Equation 8](#).

$$f_z = \frac{1}{2 \times \pi \times R_{COMP} \times C_{COMP}} \quad (8)$$

Selecting the Soft-Start Capacitor (Boost Converter)

The boost converter features a programmable soft-start function that ramps up the output voltage to limit the inrush current drawn from the supply voltage. The soft-start duration is set by the capacitor connected between the SS pin and AGND according to [Equation 9](#).

$$t_{SS} = \frac{C_{SS} \times V_{REF}}{I_{SS}} \quad (9)$$

where C_{SS} is the capacitor connected between the SS pin and GND, V_{REF} is the internal 1.24-V reference of the IC, and I_{SS} is the internally generated 10- μ A soft-start current.

Selecting the Isolation Switch Gate Drive Components

The isolation switch is controlled by an active-low signal generated by the GD pin. Because this signal is open-drain, an external pullup resistor is required to turn the MOSFET switch off. If the maximum MOSFET gate-source voltage rating is less than the maximum V_{IN} , two resistors in series can be used to reduce the maximum V_{GS} applied to the device. The exact value of the gate drive resistors is not critical: 100 k Ω for both is a good value to start with.

A capacitor can also be connected in parallel with the top resistor, as illustrated in [Figure 39](#). The effect of this capacitor is to slow down the speed with which the transistor turns on, thereby limiting inrush current. (Note that the capacitor also slows down the speed with which the transistor turns off, and therefore the speed with which it can respond to error conditions.)

Even when trying to limit inrush current, the capacitor must not be too large or the output voltage will rise so slowly the condition will be interpreted as an error (see the [Power Supply Sequencing in Detail](#) section). Typical values are 10 nF to 100 nF, depending on the transistor used for the isolation switch and the value of the gate-drive resistors.

Note that even in applications that do not use an isolation switch, an external pullup resistor (typically 100 k Ω) between GD and V_{IN} is required.

BUCK CONVERTER

The buck converter is a non-synchronous type that runs at a fixed frequency of 750 kHz. The converter features integrated soft-start (0.66 ms), bootstrap, and compensation circuits to minimize external component count. The buck converter internal block diagram is shown in [Figure 40](#), and a typical application circuit in [Figure 41](#).

The output voltage of the buck converter is internally programmed to 3.3 V and is enabled as soon as V_{IN} exceeds the UVLO threshold. For best performance, the buck converter FB pin should be connected directly to the positive terminal of the output capacitor(s).

The buck converter can operate in either continuous conduction mode (CCM) or discontinuous conduction mode (DCM), depending on the load current. At medium and high load currents, the inductor current is always greater than zero and the converter operates in CCM; at low load currents, the inductor current is zero during part of each switching cycle, and the converter operates in DCM. The switch node waveforms for CCM and DCM operation are shown in [Figure 11](#) and [Figure 12](#). Note that the ringing seen during DCM operation occurs because of parasitic capacitance in the PCB layout and is quite normal for DCM operation. However, there is little energy contained in the ringing waveform, and it does not significantly affect EMI performance. [Equation 10](#) can be used to calculate the load current below which the buck converter operates in DCM.

$$I_{DCM} = \frac{(V_{IN} - V_{LOGIC})}{2 \times L \times f_{SW}} \times \frac{V_{LOGIC}}{V_{IN}} \quad (10)$$

The buck converter uses a skip mode to regulate V_{LOGIC} at low load currents. This mode allows the converter to maintain its output at the required voltage while still meeting the requirement of a *minimum on-time*. The buck converter enters skip mode when its feedback voltage exceeds the skip-mode threshold (25% above the normal V_{FBB} regulation voltage). During skip mode, the buck converter switches for a few cycles, then stops switching for a few cycles, and then starts switching again, and so on, for as long as V_{FBB} remains above the skip-mode threshold. Output voltage ripple can be higher during skip mode (see [Figure 13](#)).



PROTECTION (BUCK CONVERTER)

To protect against short-circuit conditions, the buck converter automatically limits its output current when the voltage applied to its FBB pin is less than 1.065 V. To reduce power dissipation in the IC, the buck converter switches at 25% of its nominal switching frequency as long as $V_{FBB} < 1.065$ V. When V_{FBB} is between 1.065 V and 2.13 V, the buck converter switches at 50% of its nominal switching frequency.

Note: Because the negative charge pump is driven from its switch node, a short-circuit condition on the buck converter output also causes the loss of V_{GL} until the short circuit is removed.

An internal pullup prevents the buck converter from generating excessive output voltages if its FBB pin is left floating.

Buck Converter Design Procedure

Because the negative charge pump is driven from the buck converter switch node, the effective output current for design purposes is greater than I_{LOGIC} alone. For best performance, the effective current calculated using Equation 11 should be used during the design.

$$I_{LOGIC(EFFECTIVE)} = I_{LOGIC} + \frac{|V_{GL}| \times I_{GL}}{V_{LOGIC}} \quad (11)$$

Calculate Converter Duty Cycle (Buck Converter)

The simplest way to calculate the converter duty cycle is to use the efficiency curve in Figure 7 to determine the converter efficiency under the anticipated load conditions and insert this value into Equation 12⁽¹⁾. Alternatively, a worst-case value (e.g., 80%) can be used for efficiency.

$$D = \frac{V_{LOGIC}}{V_{IN} \times \eta} \quad (12)$$

(1) Valid only when buck converter operates in CCM.

Calculate Maximum Output Current (Buck Converter)

The maximum output current that the buck converter can supply can be calculated using Equation 13. The minimum specified output current occurs at the minimum duty cycle (which occurs at maximum V_{IN}) and maximum frequency (900 kHz).

$$I_{LOGIC(EFFECTIVE)} = I_{SW(LIM)} - \frac{V_{IN} \times (1 - D)}{2 \times f_{SW} \times L} \times D \quad (13)$$

Where $I_{SW(LIM)}$ is the minimum specified switch current limit (1.5 A) and f_{SW} is the converter switching frequency.

Calculate Peak Switch Current (Buck Converter)

Equation 14 can be used to calculate the peak switch current occurring in a given application. The worst-case (maximum) peak current occurs at maximum V_{IN} .

$$I_{SW(PK)} = I_{LOGIC(EFFECTIVE)} + \frac{V_{IN} \times (1 - D)}{2 \times f_{SW} \times L} \times D \quad (14)$$

Inductor Selection (Buck Converter)

The buck converter is designed for use with inductors in the range 6.8 μ H to 15 μ H, and is optimized for 10 μ H. The inductor must be capable of supporting the peak current calculated by Equation 14 without saturating. Alternatively, a more conservative approach can be used in which an inductor is selected whose saturation current is greater than the maximum switch current limit (2.25 A).

Another important parameter is dc resistance, which can significantly affect the overall converter efficiency. Physically larger inductors tend to have lower dc resistance (DCR) due to the use of thicker wire. The type and core material of the inductor can also affect efficiency, sometimes by as much as 10%. Table 4 shows some suitable inductors.

Table 4. Buck Converter Inductor Selection

PART NUMBER	INDUCTOR VALUE	COMPONENT SUPPLIER	SIZE (L×W×H, mm)	I _{SAT} / DCR
CDRH8D43	10 µH	Sumida	8.3 × 8.3 × 4.5	4 A / 29 mΩ
CDRH8D38	10 µH	Sumida	8.3 × 8.3 × 4	3 A / 38 mΩ
MSS 1048-103	10 µH	Coilcraft	10.5 × 10.5 × 5.1	4.8 A / 26 mΩ
744066100	10 µH	Wuerth	10 × 10 × 3.8	4 A / 28 mΩ

Rectifier Diode Selection (Buck Converter)

To achieve good efficiency, the rectifier diode should be a Schottky type. Its reverse voltage rating should be higher than the maximum V_{IN} . The average rectified forward current through the diode can be calculated using [Equation 15](#).

$$I_{RECT(AVG)} = I_{LOGIC(EFFECTIVE)} \times (1 - D) \quad (15)$$

A Schottky diode with a 2-A average rectified current rating is adequate for most applications. Smaller diodes can be used in applications with lower output current; however, the diode must be able to handle the power dissipated in it, which can be calculated using [Equation 16](#).

$$P_{RECT} = I_{RECT(AVG)} \times V_F \quad (16)$$

Table 5. Buck Converter Rectifier Diode Selection

PART NUMBER	V_R / I_{AVG}	V_F	$R_{\theta JA}$	SIZE	COMPONENT SUPPLIER
MBRS320	20 V / 3 A	0.44 V at 3 A	46°C/W	SMC	International Rectifier
SL22	20 V / 2 A	0.44 V at 2 A	75°C/W	SMB	Vishay Semiconductor
SS22	20 V / 2 A	0.5 V at 2 A	75°C/W	SMB	Fairchild Semiconductor

Output Capacitance Selection (Buck Converter)

To minimize output voltage ripple, the output capacitors should be good-quality ceramic types with low ESR. The buck converter is stable over a range of output capacitance values, but an output capacitance of 44 µF is a good starting point for typical applications.

POSITIVE CHARGE PUMP CONTROLLER

The positive charge pump is driven directly from the boost converter switch node and regulated by controlling the current through an external PNP transistor. An internal block diagram of the positive charge pump is shown in [Figure 42](#) and a typical application circuit in [Figure 43](#).

During normal operation, the TPS65163 is able to provide up to 5 mA of base current and is designed to work best with transistors whose dc gain (h_{FE}) is between 100 and 300. The charge pump is protected against short circuits on its output, which are detected when the voltage on the charge pump feedback pin (V_{FBP}) is below 100 mV. During short-circuit mode, the base current available from the CTRLP pin is limited to 55 µA. Note that if a short circuit is detected during normal operation, boost converter switching is also halted until $V_{FBP} > 100$ mV.

NOTE

The emitter of the external PNP transistor should always be connected to V_S , the output of the boost converter at the output side of the isolation switch. The TPS65163 uses the CTRLP pin to sense the voltage across the isolation switch and control boost converter start-up. Connecting the emitter of the external PNP transistor to any other voltage (e.g., V_{IN}) prevents proper start-up of the boost converter and positive charge pump.

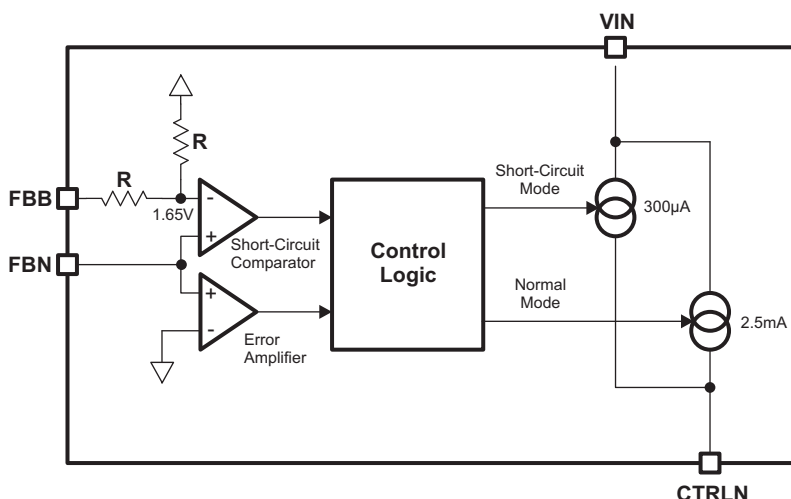


Figure 42. Positive Charge Pump Internal Block Diagram

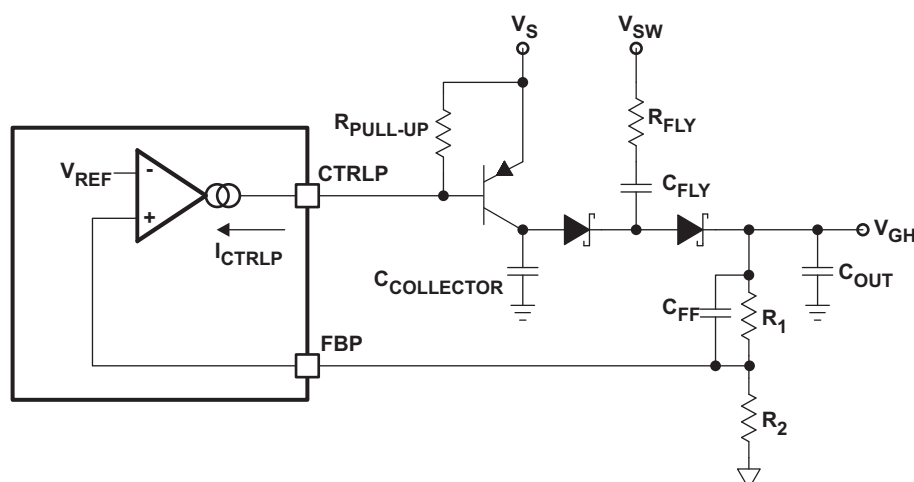


Figure 43. Positive Charge Pump Application Circuit

POSITIVE CHARGE PUMP DESIGN PROCEDURE

Setting the Output Voltage (Positive Charge Pump)

The positive charge pump output voltage is programmed by a resistor divider according to [Equation 17](#).

$$V_{GH} = V_{REF} \times \left(1 + \frac{R_1}{R_2} \right) \quad (17)$$

where V_{REF} is the internal 1.24-V reference of the TPS65163.

Rearranging [Equation 17](#), the values of R_1 and R_2 are calculated:

$$R_1 = R_2 \times \left(\frac{V_{OUT}}{V_{REF}} - 1 \right) \quad (18)$$

A current of the order of 1 mA through the resistor network ensures good accuracy and increases the circuit's immunity to noise. It also ensures a minimum load on the charge pump, which reduces output voltage ripple under no-load conditions. A good approach is to assume a value of about 1.2 kΩ for the lower resistor (R_2) and then select the upper resistor (R_1) to set the desired output voltage.

Note that the maximum voltage in an application is determined by the boost converter output voltage and the voltage drop across the diodes and PNP transistor. For a typical application in which the positive charge pump is configured as a voltage doubler, the maximum output voltage is given by [Equation 19](#).

$$V_{GH(MAX)} = (2 \times V_S) - (2 \times V_F) - V_{CE} \quad (19)$$

where V_S is the output voltage of the boost converter, V_F is the forward voltage of each diode, and V_{CE} is the collector-emitter voltage of the PNP transistor (recommended to be at least 1 V to avoid transistor saturation).

Selecting the Feed-Forward Capacitor (Positive Charge Pump)

To improve transient performance, a feed-forward capacitor connected across the upper feedback resistor (R_1) is recommended. The feed-forward capacitor modifies the frequency response of the feedback network by adding the zero, which improves high frequency gain. For typical applications, a zero at 5 kHz is a good place to start, in which case C_{FF} can be calculated using [Equation 20](#).

$$C_{FF} = \frac{1}{2 \times \pi \times 5 \text{ kHz} \times R_1} \quad (20)$$

Selecting the PNP Transistor (Positive Charge Pump)

The PNP transistor used to regulate V_{GH} should have a dc gain (h_{FE}) of at least 100 when its collector current is equal to the charge pump output current. The transistor should also be able to withstand voltages up to $2 \times V_S$ across its collector-emitter junction (V_{CE}).

The power dissipated in the transistor is given by [Equation 21](#). The transistor must be able to dissipate this power without its junction becoming too hot. Note that the ability to dissipate power depends on adequate PCB thermal design.

$$P_Q = [(2 \times V_S) - (2 \times V_F) - V_{GH}] \times I_{GH} \quad (21)$$

where I_{GH} is the mean (not RMS) output current drawn from the charge pump.

A pullup resistor is also required between the base and emitter of the transistor. The value of this resistor is not critical, but it should be large enough not to divert significant current away from the base of the transistor. A value of 100 kΩ is suitable for most applications.

Selecting the Diodes (Positive Charge Pump)

Small-signal diodes can be used for most low-current applications (<50 mA), and higher-rated diodes for higher-power applications. The average current through the diode is equal to the output current, so that the power dissipated in the diode is given by [Equation 22](#).

$$P_D = I_{GH} \times V_F \quad (22)$$

The peak current through the diode occurs during start-up, and for a few cycles may be as high as a few amperes. However, this condition typically lasts for <1 ms and can be tolerated by many diodes whose repetitive current rating is much lower. The reverse voltage rating of the diodes should be equal to $2 \times V_S$.

Table 6. Positive Charge-Pump Diode Selection

PART NUMBER	I_{AVG}	I_{PK}	V_R	V_F	COMPONENT SUPPLIER
BAV99W	150 mA	1 A for 1 ms	75 V	1 V at 50 mA	NXP
BAT54S	200 mA	600 mA for 1 s	30 V	0.8 V at 100 mA	Fairchild Semiconductor
MBR0540	500 mA	5.5 A for 8 ms	40 V	0.51 at 500 mA	Fairchild Semiconductor

Selecting the Capacitors (Positive Charge Pump)

For lowest output voltage ripple, low-ESR ceramic capacitors are recommended. The actual value is not critical, and 1 μF to 10 μF is suitable for most applications. Larger capacitors provide better performance in applications where large load transient currents are present.

TPS65163

SLVSA28 –OCTOBER 2009

www.ti.com

A flying capacitor in the range 100 nF to 1 μ F is suitable for most applications. Larger values experience a smaller voltage drop by the end of each switching cycle and allow higher output voltages and/or currents to be achieved. Smaller values tend to be physically smaller and a bit cheaper. For best performance, it is recommended to include a resistor of a few ohms (2 Ω is a good value to start with) in series with the flying capacitor to limit peak currents occurring at the instant of switching.

A collector capacitor in the range 100 nF to 1 μ F is suitable for most applications. Larger values are more suitable for high-current applications but can affect stability if they are too big.

A combination of $C_{OUT} = 10 \mu\text{F}$, $C_{FLY} = 1 \mu\text{F}$, and $C_{COLLECTOR} = 100 \text{ nF}$ is a good starting point for most applications (the final values can be optimized on a case-by-case basis if necessary).

NEGATIVE CHARGE PUMP

The negative charge pump controller uses an external NPN transistor to regulate an external charge pump circuit. The IC is optimized for use with transistors having a dc gain (h_{FE}) in the range 100 to 300; however, it is possible to use transistors outside this range, depending on the application requirements. Regulation of the charge pump is achieved by using the external transistor as a controlled current source whose output depends on the voltage applied to the FBN pin: the higher the transistor current, the greater the charge transferred to the output during each switching cycle and therefore the higher (i.e., the more negative) the output voltage. The internal block diagram of the negative charge pump is shown in Figure 44, and a typical application circuit in Figure 45.

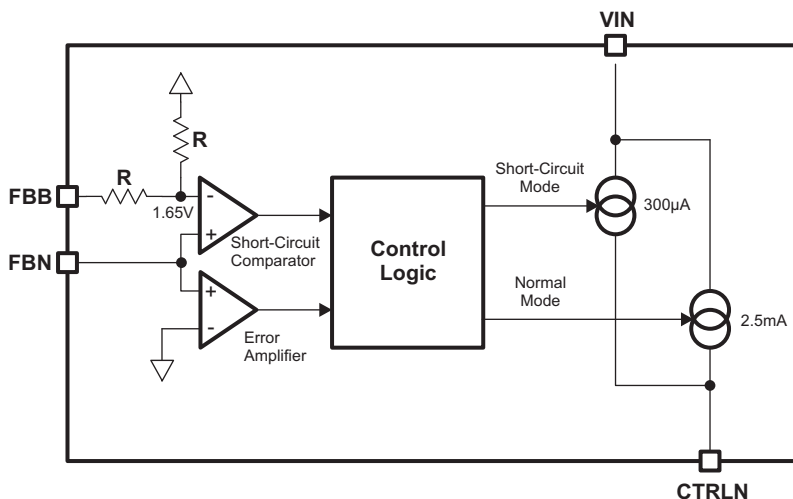


Figure 44. Negative Charge Pump Internal Block Diagram

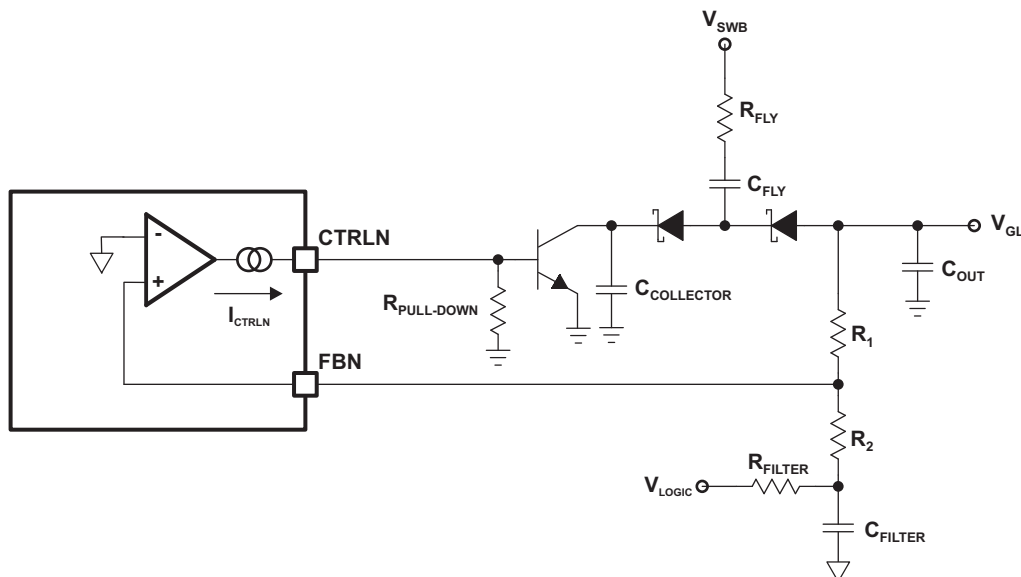


Figure 45. Negative Charge Pump Application Circuit

The TPS65163 contains a circuit to protect the negative charge pump against short circuits on its output. A short-circuit condition is detected as long as the FBN pin remains above 1.65 V, during which time the charge pump output current is limited.

To ensure proper start-up under normal conditions, circuit designers should make sure the full load current is not drawn by the load until the feedback voltage V_{FBN} is below the short-circuit threshold voltage. The value of V_{GL} beyond which the negative charge pump no longer works in short-circuit mode is given by Equation 23.

$$V_{GL(SC)} = -1.65 \text{ V} \times \left(1 - \frac{R_1}{R_2}\right) \quad (23)$$

NEGATIVE CHARGE PUMP DESIGN PROCEDURE

Setting the Output Voltage (Negative Charge Pump)

The negative charge pump output voltage is programmed by a resistor divider according to Equation 24.

$$V_{GL} = -V_{LOGIC} \times \frac{R_1}{R_2} \quad (24)$$

Rearranging Equation 25, the values of R_1 and R_2 are calculated.

$$R_1 = R_2 \times \frac{|V_{GL}|}{V_{LOGIC}} \quad (25)$$

A current of the order of 1 mA through the resistor network ensures accuracy and increases the circuit's immunity to noise. It also ensures a minimum load on the charge pump, which reduces output voltage ripple under no-load conditions. A good approach is to assume a value of about 3.3 kΩ for the lower resistor (R_2) and then select the upper resistor (R_1) to set the desired output voltage.

Note that the maximum voltage in an application is determined by the boost converter output voltage and the voltage drop across the diodes and NPN transistor. For a typical application in which the negative charge pump is configured as a voltage inverter, the maximum (i.e., most negative) output voltage is given by Equation 26.

$$V_{GL(MAX)} = -V_{IN} + (2 \times V_F) + V_{CE} \quad (26)$$

where V_F is the forward voltage of each diode and V_{CE} is the collector-emitter voltage of the NPN transistor (recommended to be at least 1 V to avoid transistor saturation).

Selecting the NPN Transistor (Negative Charge Pump)

The NPN transistor used to regulate V_{GL} should have a dc gain (h_{FE}) of at least 100 when its collector current is equal to the charge pump output current. The transistor should also be able to withstand voltages up to V_{IN} across its collector-emitter junction (V_{CE}).

The power dissipated in the transistor is given by Equation 27. The transistor must be able to dissipate this power without its junction becoming too hot. Note that the ability to dissipate power depends heavily on adequate PCB thermal design.

$$P_Q = [V_{IN} - (2 \times V_F) - |V_{GL}|] \times I_{GL} \quad (27)$$

where I_{GL} is the *mean* (not RMS) output current drawn from the charge pump.

Selecting the Diodes (Negative Charge Pump)

Small-signal diodes can be used for most low-current applications (<50 mA) and higher-rated diodes for higher-power applications. The average current through the diode is equal to the output current, so that the power dissipated in the diode is given by Equation 28.

$$P_D = I_{GL} \times V_F$$

The peak current through the diode occurs during start-up and for a few cycles may be as high as a few amperes. However, this condition typically lasts for <1 ms and can be tolerated by many diodes whose repetitive current rating is much lower. The diodes' reverse voltage rating should be equal to at least $2 \times V_{IN}$.

Table 7. Negative Charge Pump Diode Selection

PART NUMBER	I_{AVG}	I_{PK}	V_R	V_F	COMPONENT SUPPLIER
BAV99W	150 mA	1 A for 1 ms	75 V	1 V at 50 mA	NXP
BAT54S	200 mA	600 mA for 1 s	30 V	0.8 V at 100 mA	Fairchild Semiconductor
MBR0540	500 mA	5.5 A for 8 ms	40 V	0.51 A at 500 mA	Fairchild Semiconductor

Selecting the Capacitors (Negative Charge Pump)

For lowest output voltage ripple, low-ESR ceramic capacitors are recommended. The actual value is not critical, and 1 μ F to 10 μ F is suitable for most applications. Larger capacitors provide better performance in applications where large load transient currents are present.

A flying capacitor in the range 100 nF to 1 μ F is suitable for most applications. Larger values experience a smaller voltage drop by the end of each switching cycle and allow higher output voltages and/or currents to be achieved. Smaller values tend to be physically smaller and a bit cheaper.

A collector capacitor in the range 100 nF to 1 μ F is suitable for most applications. Larger values are more suitable for high-current applications but can affect stability if they are too big.

A combination of $C_{OUT} = 10 \mu$ F, $C_{FLY} = 1 \mu$ F, and $C_{COLLECTOR} = 100$ nF is a good starting point for most applications (the final values can be optimized on a case-by-case basis if necessary).

POWER-SUPPLY SEQUENCING

Figure 46 shows the power-supply sequencing block diagram. The four supply rails generated by the TPS65163 turn on the following sequence: first V_{LOGIC} , then V_{GL} , then V_{GH} and V_S , as shown in Figure 46.

The buck converter turns on when the supply voltage exceeds the undervoltage threshold.

When the internal power-good signal of the buck converter has been asserted, the reset timer starts; after the reset time is over, RST goes high and the negative charge pump is enabled. This sequence ensures that the negative charge pump, which is driven by the switch node of the buck converter, does not attempt to draw current until the T-CON is out of reset and drawing current from V_{LOGIC} .

At the same time as the negative charge pump is enabled, an internal delay timer is started. This timer generates a delay, after which the boost converter and positive charge pump are enabled. The delay time t_{DLY} is determined by the capacitor C_{DLY} connected between the DLY pin and AGND according to Equation 29.

$$t_{DLY} = \frac{C_{DLY} \times V_{REF}}{I_{DLY}} \quad (29)$$

No special sequencing is implemented during power-down, and all power supplies are disabled if V_{IN} falls below V_{UVLO} .

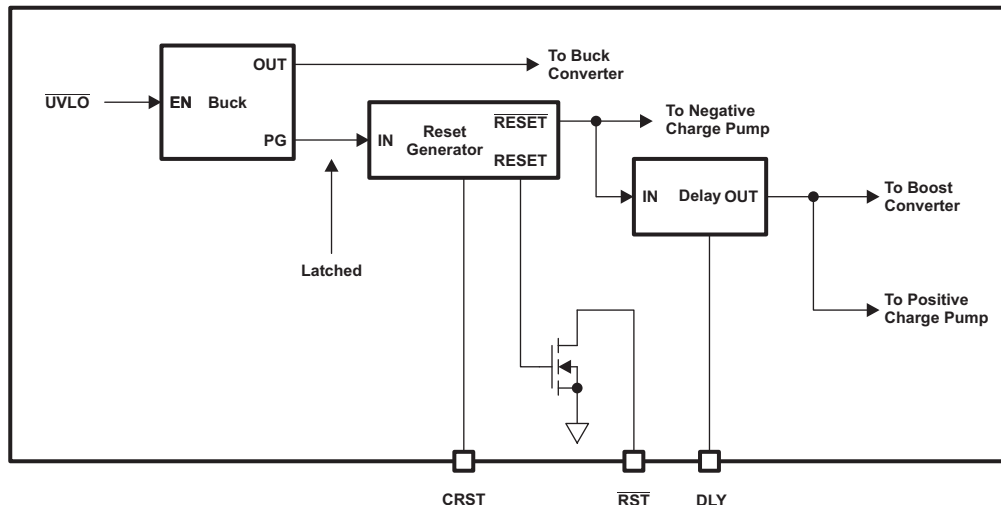


Figure 46. Power Supply Sequencing Block Diagram

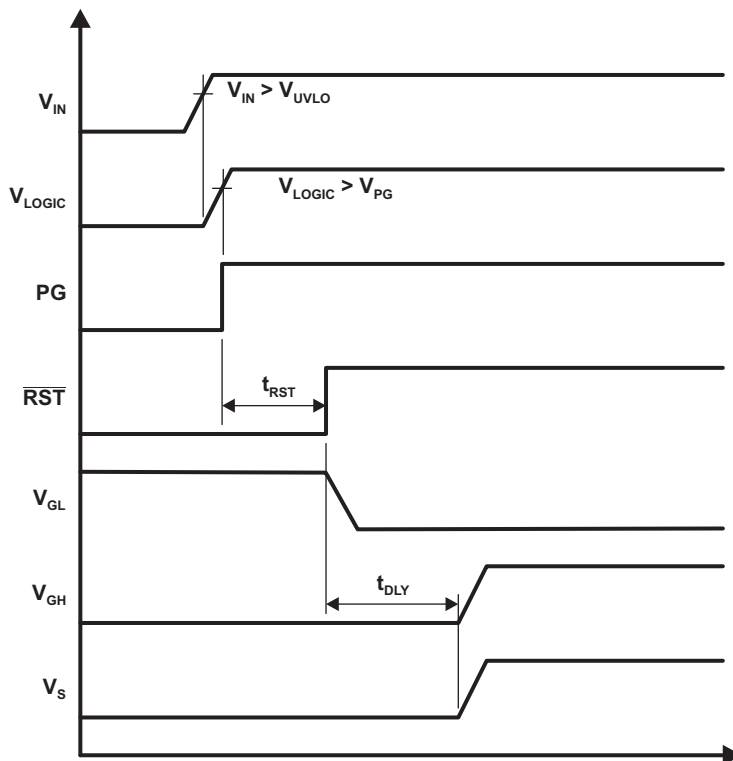


Figure 47. Power Supply Sequencing

POWER-SUPPLY SEQUENCING IN DETAIL

The detailed start-up behavior of the boost converter and positive charge pump is illustrated in [Figure 48](#).

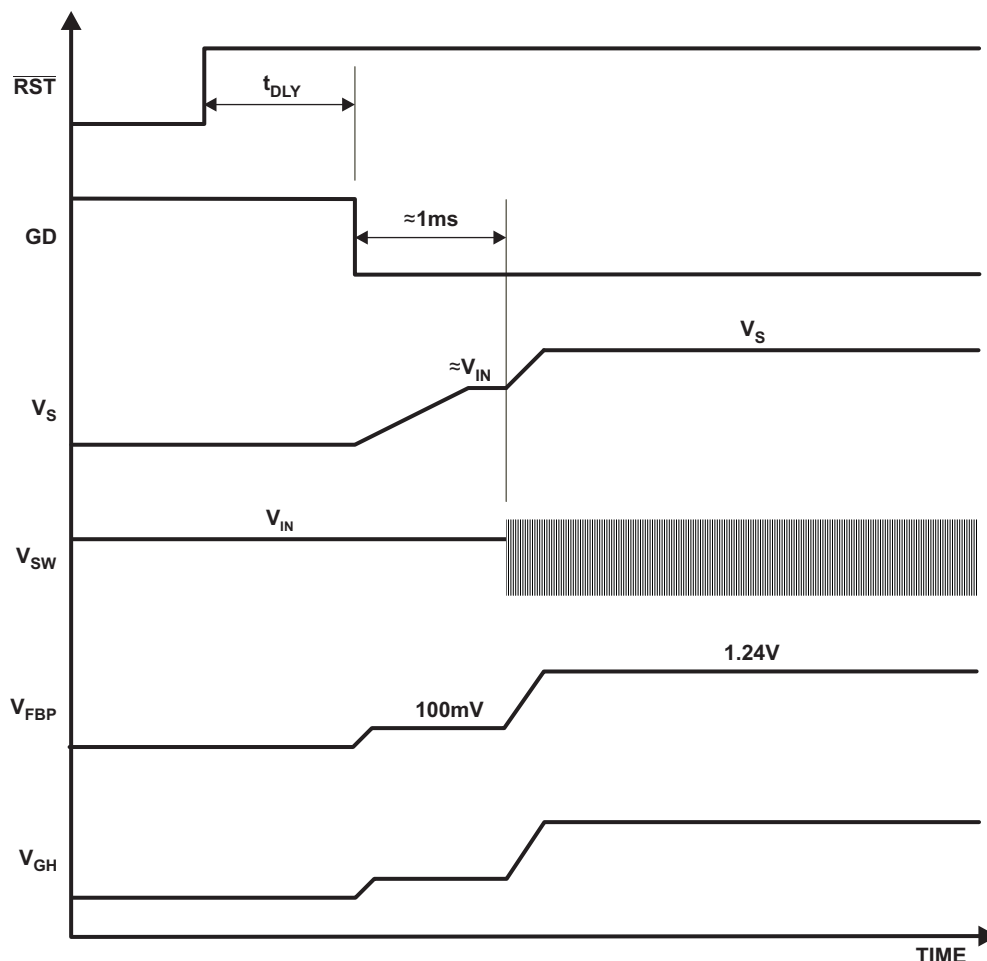


Figure 48. Boost Converter and Positive Charge Pump Detailed Start-Up Behavior

The isolation switch is enabled when the GD pin goes low, t_{DLY} seconds after $\overline{RST}$ goes high. When the isolation switch turns on, V_S rises at a rate determined by the RC network controlling the switch's gate and the amount of capacitance on the output. The TPS65163 senses the rising V_S via the CTRLP pin, and 1 ms after GD goes low checks that $V_S \approx V_{IN}$. If it is, then the boost converter is enabled. This scheme prevents the boost converter from switching before the isolation switch is fully enabled, which could otherwise cause overvoltage conditions to damage the switch node. If V_S does not reach $\approx V_{IN}$ within 1 ms of the GD pin going low, the TPS65163 detects an error condition and the boost converter is not enabled.

The positive charge pump short-circuit mode is enabled when the GD pin goes low. Although the boost converter is not switching at this point, there is a dc path from V_S to V_{GH} , and the output ramps up as current flows into the collector capacitor and output capacitors. When V_{FBP} reaches 100 mV, the IC determines that no short circuit exists, and the output current from the CTRLP pin is disabled temporarily. (If there is no significant load connected to V_{GH} , the output voltage remains almost constant, held up by the output capacitance; if there is a load, the output voltage decays.) When the boost converter starts switching, normal operation of the positive charge pump is enabled, and V_{GH} ramps up to its programmed value. (Note that the positive charge pump implements a soft-start characteristic that ramps the current available from the CTRLP pin over time. This causes the collector voltage of the regulating PNP to go temporarily negative.)

RESET GENERATOR

The reset generator generates an active low signal that can be used to reset the timing controller used in LCD applications. The $\overline{RST}$ output is an open-drain type and requires an external pullup resistor. This signal is typically pulled up to the 3.3-V supply generated by the buck converter, which also supplies the timing controller I/O functions.

Reset pulse timing starts when the internal power-good signal of the buck converter is asserted, and its duration is set by the size of the capacitor connected between the CRST pin and AGND, as described by Equation 30.

$$t_{RST} = \frac{C_{RST} \times V_{REF}}{I_{RST}} \quad (30)$$

The duration of the reset pulse also affects power-supply sequencing, as the boost converter and positive charge pump are not enabled until the reset pulse is finished. In applications that do not require a reset signal, the $\overline{RST}$ pin can be left floating or tied to AGND. This does not prevent the boost converter or positive charge pump from starting.

If the CRST pin is left open-circuit, the duration of the reset pulse is close to zero (determined only by the parasitic capacitance present), and the boost converter and positive charge pump start up instantaneously.

Alternatively, the CRST pin can be used to enable the boost converter and charge pumps by connecting a 3.3-V logic-level ENABLE signal via a 10-k Ω resistor, as shown in Figure 49. Using this scheme, the buck converter starts as soon as V_{IN} exceeds the UVLO threshold, but the negative charge pump is not enabled until ENABLE goes high. The boost converter and positive charge pump are enabled t_{DLY} seconds after ENABLE goes high, where t_{DLY} is defined by the capacitor connected to the DLY pin. The resulting power-supply sequencing is shown in Figure 50.

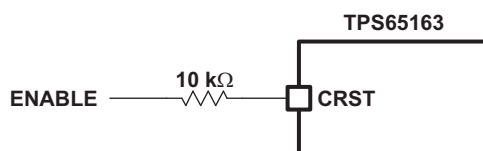


Figure 49. Using an ENABLE Signal to Control Boost Converter and Charge Pumps

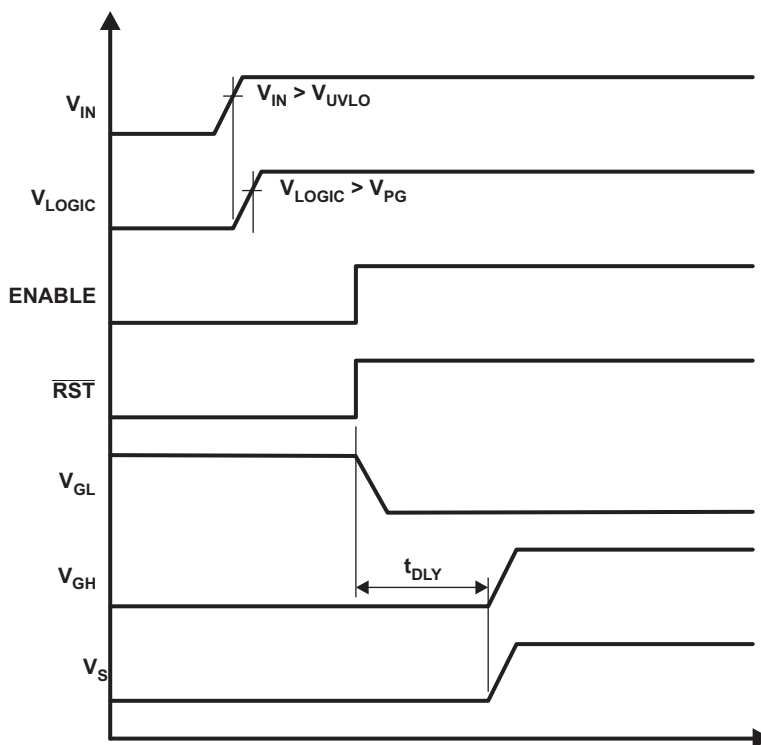


Figure 50. Power-Supply Sequencing Using an ENABLE Signal

Undervoltage Lockout

An undervoltage lockout function inhibits the device if the supply voltage V_{IN} is below the minimum needed for proper operation.

Thermal Shutdown

A thermal shutdown function automatically disables all LCD bias functions if the device junction temperature exceeds $\approx 150^{\circ}\text{C}$. The device automatically starts operating again once it has cooled down to $\approx 140^{\circ}\text{C}$.

Level Shifters and Gate Shaping

The nine level-shifter channels in the TPS65163 are divided into two groups. Channels 1 through 7 are powered from V_{GH1} and V_{GL} , channels 8 and 9 are powered from V_{GH2} and V_{GL} . Channels 1 to 6 support gate shaping and channels 7 through 9 do not. Figure 51 contains a simplified block diagram of one channel with gate voltage shaping.

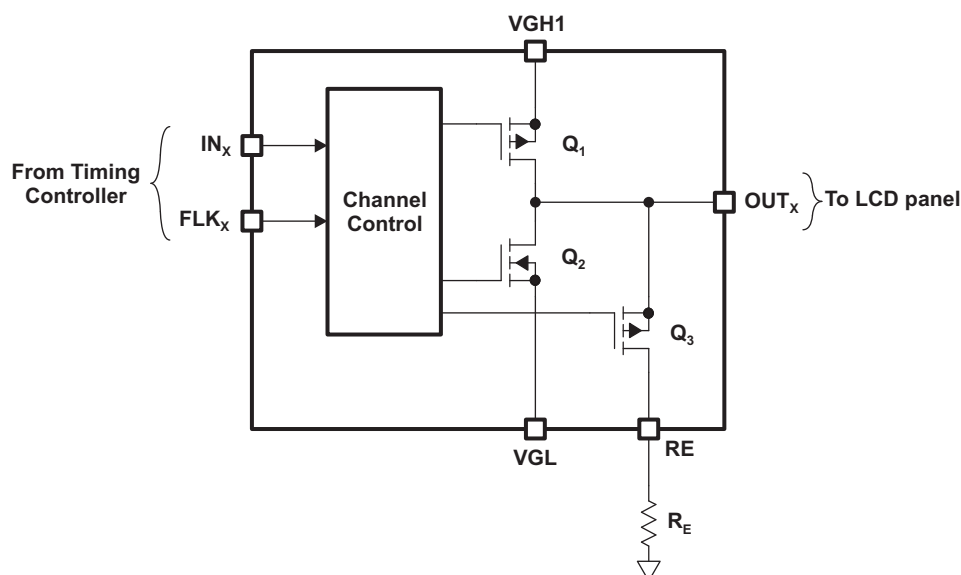


Figure 51. Level Shifter Channel with Gate Voltage Shaping

On the rising edge of IN_x , Q_1 turns on, Q_2 and Q_3 turn off, and OUT is driven to V_{GH1} . On the falling edge of FLK_x , Q_1 turns off, Q_3 is turned on, and the panel now discharges through Q_3 and R_E (see Figure 52). On the falling edge of IN_x , Q_2 turns on and Q_3 turns off, and OUT is driven to V_{GL} . This sequence is repeated in turn for each channel.

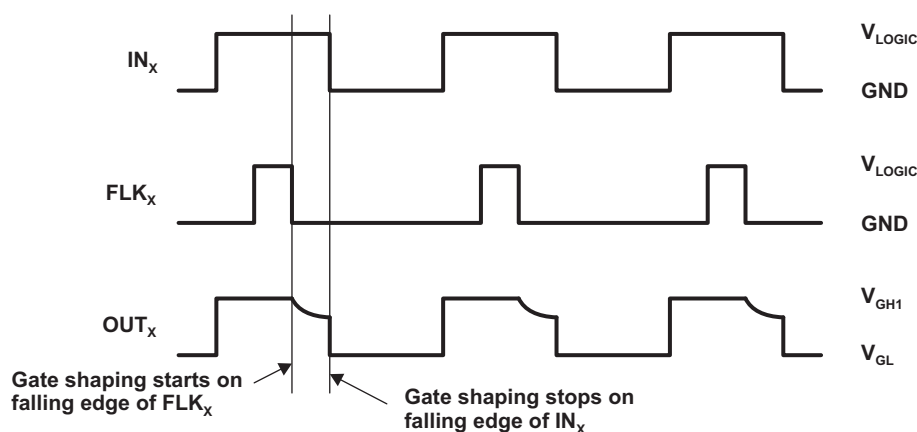


Figure 52. Gate Voltage Shaping Timing Diagram

The alternative configuration shown in [Figure 53](#) can be used to define a minimum gate voltage reached during gate voltage shaping.

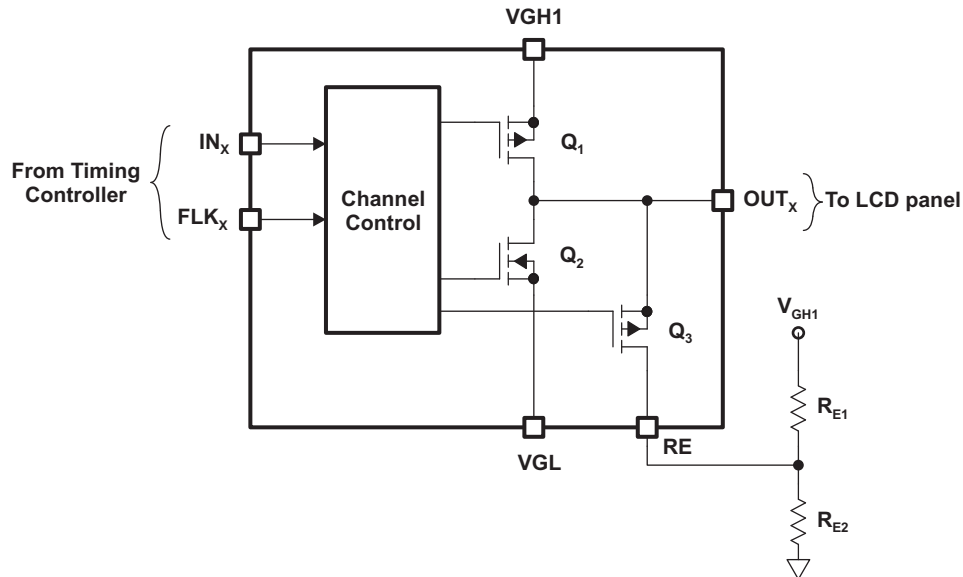


Figure 53. Alternative Gate Voltage Shaping Circuit Configuration

In this circuit, resistors R_{E1} and R_{E2} define both the rate of change of gate voltage decay and the minimum gate voltage V_{MIN} . Using the Thevenin equivalent, the operating parameters of [Figure 53](#) are calculated.

$$V_{MIN} = V_{GH1} \times \frac{R_{E2}}{R_{E1} + R_{E2}} \quad (31)$$

$$R_E = \frac{R_{E1} \times R_{E2}}{R_{E1} + R_{E2}} \quad (32)$$

Flicker Clocks

The gate voltage shaping control logic in the TPS65163 allows the device to be used with one, two or three flicker clock signals, according to the application requirements.

In six-phase applications where one signal controls gate voltage shaping for six CLK channels, the flicker clock should be connected to FLK1 and the unused pins FLK2 and FLK3 connected to GND.

In six-phase applications where three signals control gate voltage shaping for six CLK channels, the flicker clock for channels 1 and 4 should be connected to FLK1, the flicker clock for channels 2 and 5 connected to FLK2, and the flicker clock for channels 3 and 6 connected to FLK3.

In four-phase applications where two signals control gate voltage shaping for four CLK channels, the flicker clock for phases 1 and 3 should be connected to FLK1, the flicker clock for phases 2 and 4 connected to FLK2, and the unused FLK3 pin connected to GND. The unused pins IN3 and IN6 should be connected to V_{LOGIC} . Alternatively, IN3 can be connected to IN2 and IN6 connected to IN5; this arrangement can simplify PCB layout.

Gate voltage shaping is started by the falling edge of the FLK signal(s), which must occur during a valid part of the clock waveform. For six-phase systems, this means the last 60° of the clock waveform; for four-phase systems, this means the last 90° of the clock waveform (see [Figure 54](#) and [Figure 55](#)). Falling edges of the FLK signal(s) occurring outside the valid part of the clock waveform are ignored. The rising edge of the FLK signal(s) has no effect, regardless of when it occurs.

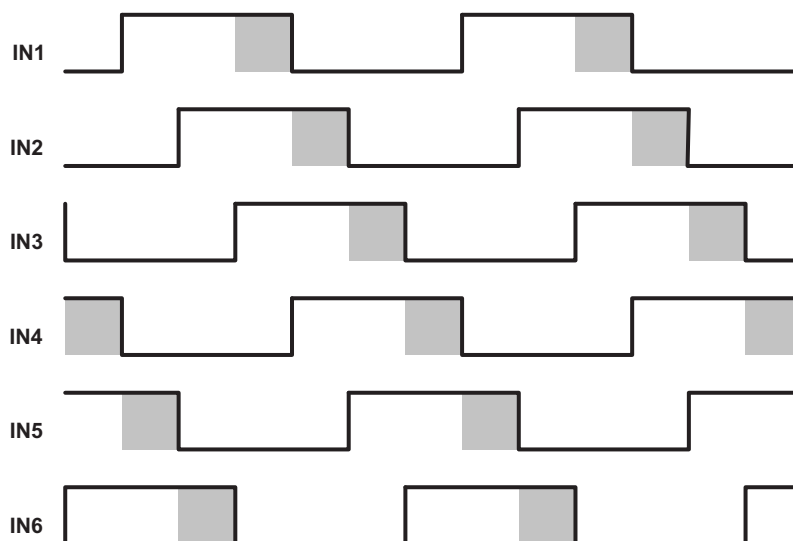


Figure 54. FLK Falling Edge Validity, Six-Phase Applications

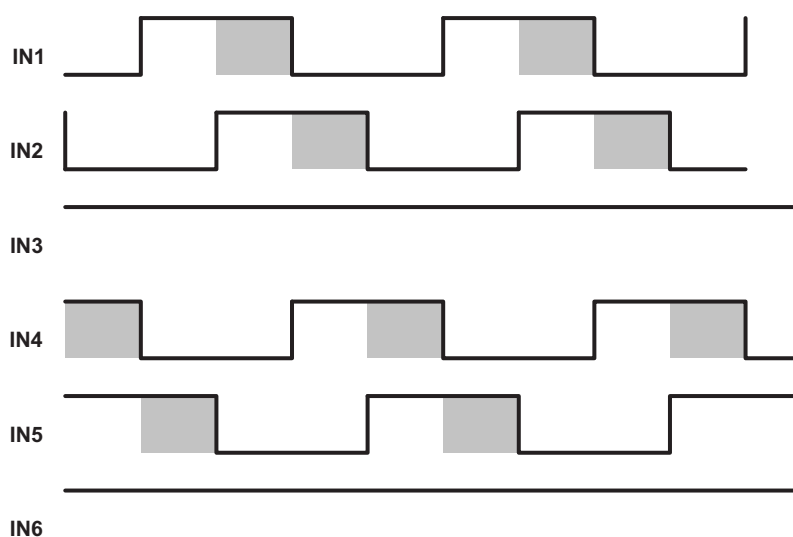


Figure 55. FLK Falling Edge Validity, Four-Phase Applications

Level Shifters Without Gate Voltage Shaping

Channels 7 through 9 do not support gate voltage shaping and are controlled only by the logic level applied to their INx pin. [Figure 56](#) contains a block diagram of a channel that does not support gate voltage shaping.

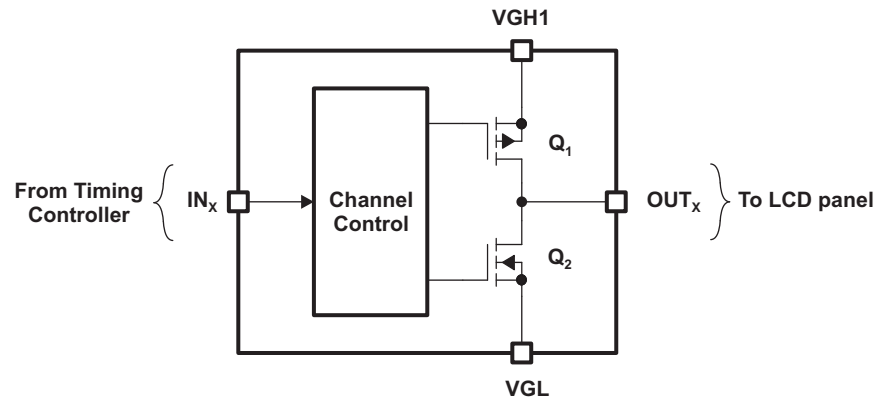


Figure 56. Block Diagram of Level Shifter Without Gate Voltage Shaping

Panel Discharge

The TPS65163 contains a function for discharging the display panel during power down. The discharge function comprises a comparator and a level shifter (see [Figure 57](#)). During normal operation, the voltage applied to the VSENSE pin is greater than V_{REF} , the output of the level shifter is low, and the DISCHARGE signal is at V_{GL} . During power down, when the voltage applied to the VSENSE pin falls below V_{REF} , the level shifter output goes high and the DISCHARGE signal tracks V_{GH1} as it discharges (see [Figure 35](#) and [Figure 36](#)).

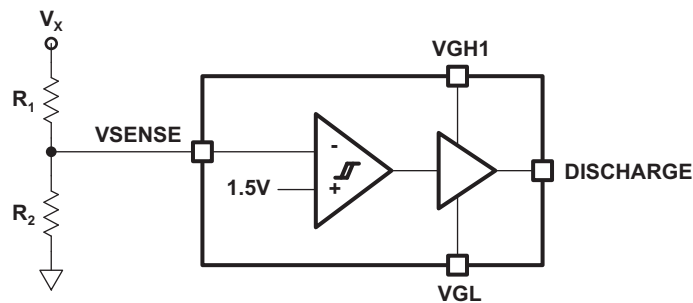


Figure 57. Panel Discharge Function Block Diagram

Suitable values for resistors R_1 and R_2 in [Figure 57](#) are calculated using [Equation 33](#).

$$R_1 = R_2 \times \left(\frac{V_x}{1.5V} - 1 \right) \quad (33)$$

where V_x is the voltage used to activate/deactivate the discharge function.

For most applications, a value between 1 k Ω and 10 k Ω for R_2 can be used (R_1 depends on the value of R_2 and the value of V_x).

APPLICATION INFORMATION

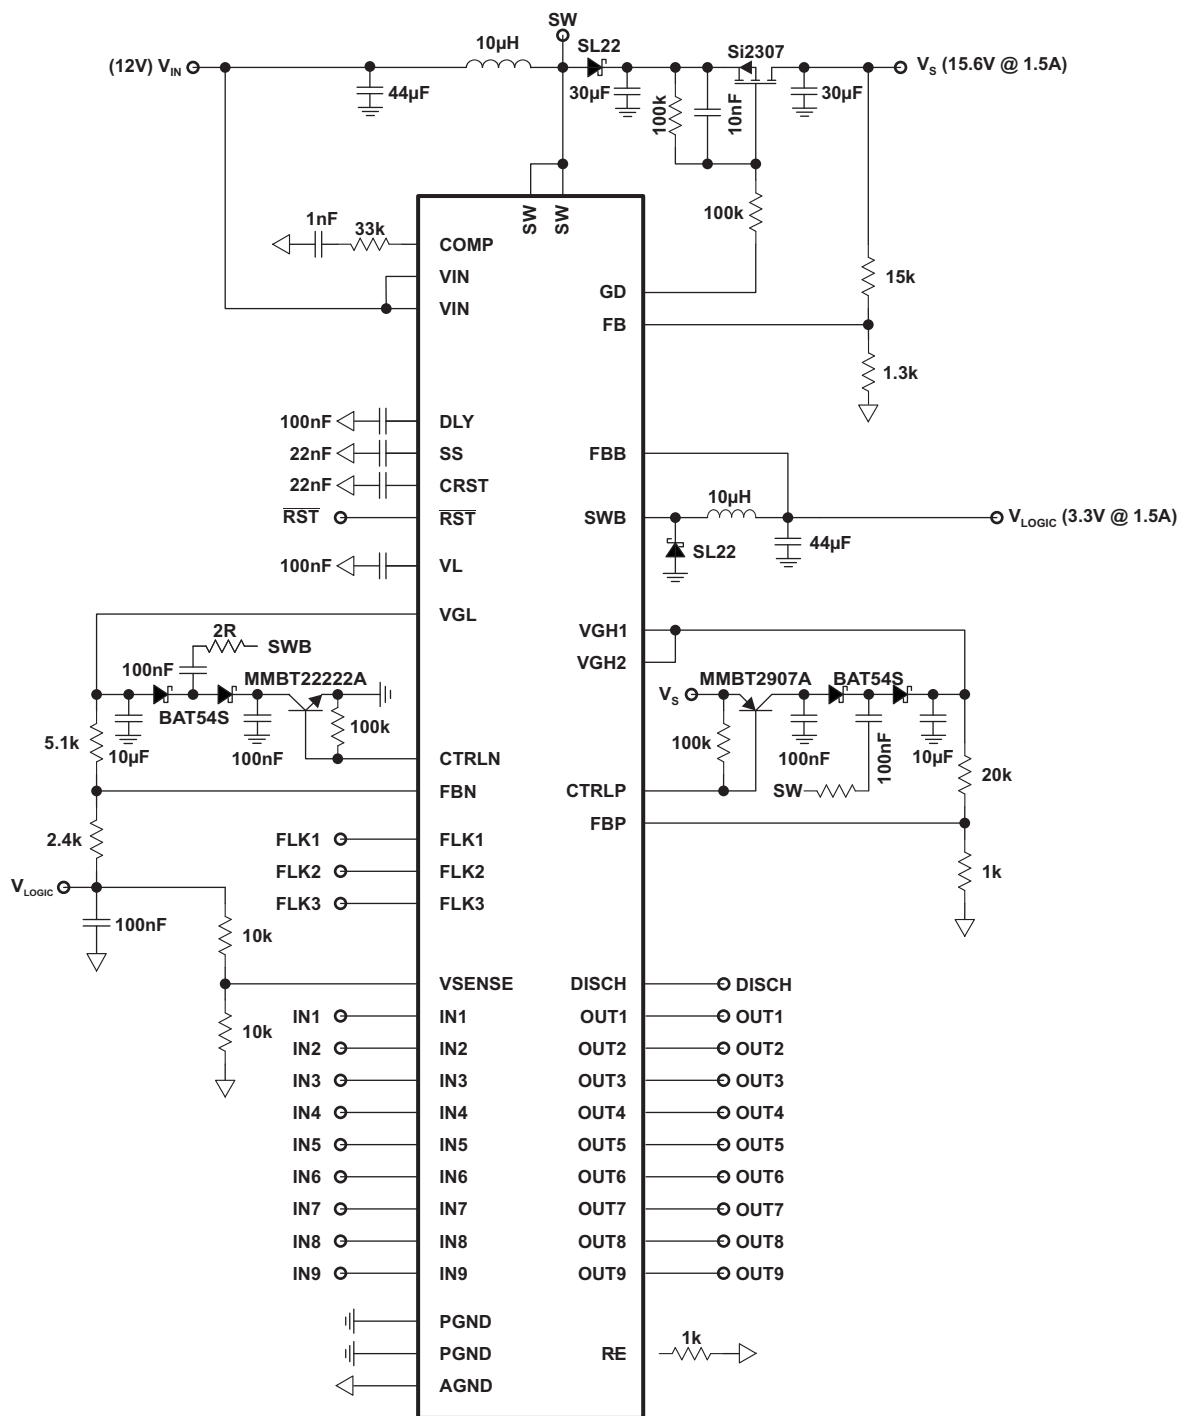


Figure 58. Typical LCD Bias Application Circuit

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Op Temp (°C)	Top-Side Markings (4)	Samples
TPS65163RGZR	ACTIVE	VQFN	RGZ	48	2500	Green (RoHS & no Sb/Br)	Call TI	Level-3-260C-168 HR	-40 to 85	TPS65163	Samples
TPS65163RGZT	ACTIVE	VQFN	RGZ	48	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	TPS65163	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) Only one of markings shown within the brackets will appear on the physical device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS65163RGZR	VQFN	RGZ	48	2500	330.0	16.4	7.3	7.3	1.5	12.0	16.0	Q2

TAPE AND REEL BOX DIMENSIONS




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS65163RGZR	VQFN	RGZ	48	2500	367.0	367.0	38.0

RGZ (S-PVQFN-N48)

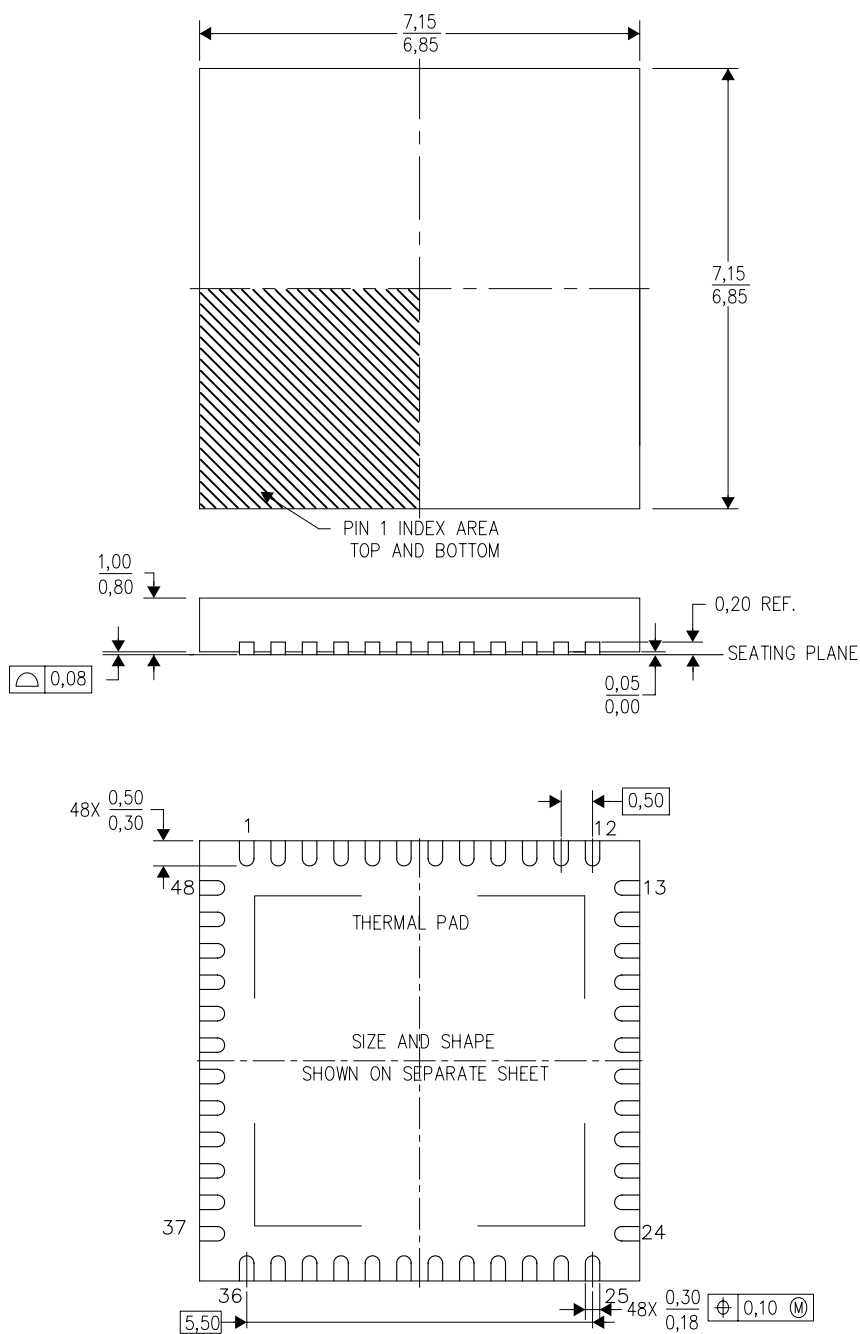PLASTIC QUAD FLATPACK NO-LEAD



4204101/F 06/11

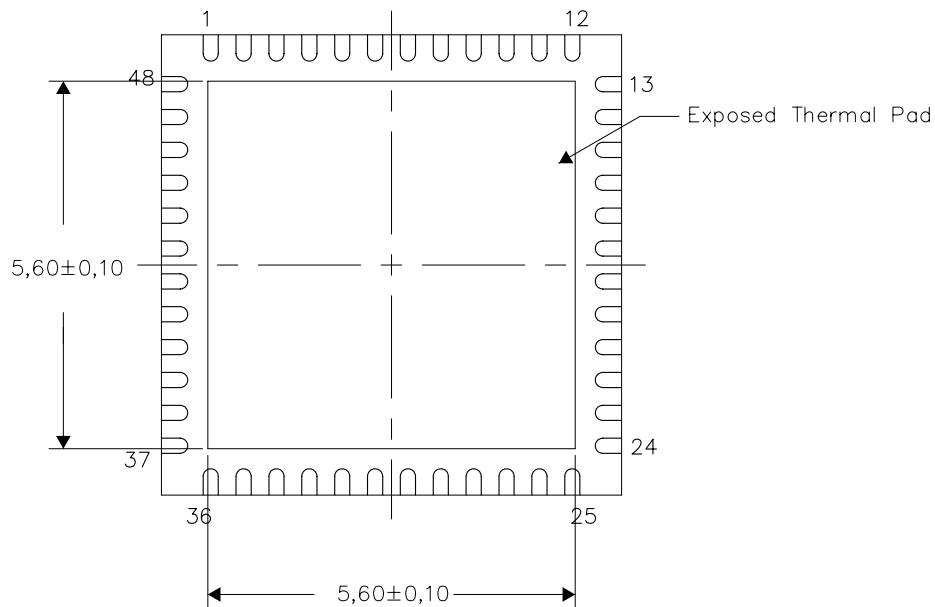
- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. Quad Flatpack, No-leads (QFN) package configuration.
 - D. The package thermal pad must be soldered to the board for thermal and mechanical performance.
 - E. See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
 - F. Falls within JEDEC MO-220.

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.



Bottom View

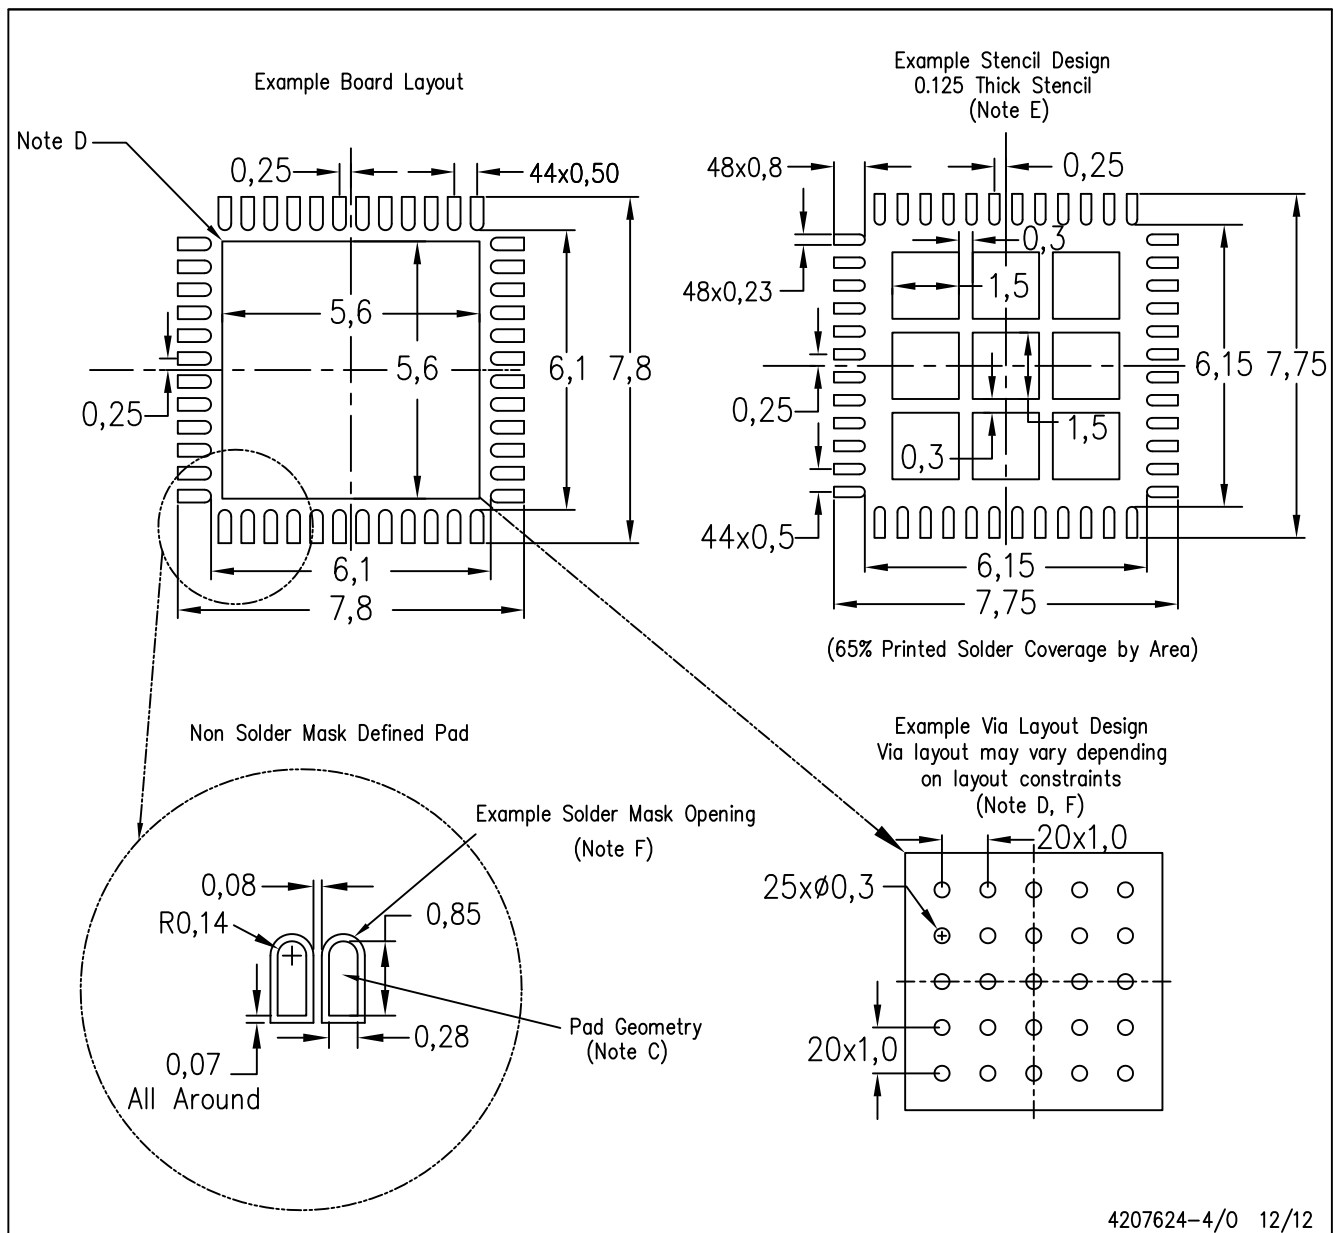
Exposed Thermal Pad Dimensions

4206354-5/R 08/11

NOTE: All linear dimensions are in millimeters

RGZ (S-PVQFN-N48)

PLASTIC QUAD FLATPACK NO-LEAD



- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Publication IPC-7351 is recommended for alternate designs.
 - This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack Packages, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <<http://www.ti.com>>.
 - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
 - Customers should contact their board fabrication site for recommended solder mask tolerances and via tenting recommendations for vias placed in the thermal pad.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com