

LOW INPUT BOOST CONVERTER WITH INTEGRATED POWER DIODE AND INPUT/OUTPUT ISOLATION

Check for Samples: [TPS61093](#)

FEATURES

- Input Range: 1.6-V to 6-V
- Integrated Power Diode and Isolation FET
- 20-V Internal Switch FET With 1.1-A Current
- Fixed 1.2-MHz Switching Frequency
- Efficiency at 15-V Output up to 88%
- Over Load and Over Voltage Protection
- Programmable Soft Start-up
- Load Discharge Path After IC Shutdown
- 2.5 × 2.5 × 0.8 mm SON Package

APPLICATIONS

- Glucose Meter
- OLED Power Supply
- 3.3-V to 12-V, 5-V to 12-V Boost Converter

DESCRIPTION

The TPS61093 is a 1.2-MHz, fixed-frequency boost converter designed for high integration and high reliability. The IC integrates a 20-V power switch, input/output isolation switch, and power diode. When the output current exceeds the over load limit, the IC's isolation switch opens up to disconnect the output from the input. This protects the IC and the input supply. The isolation switch also disconnects the output from the input during shutdown to minimize leakage current. When the IC is shutdown, the output capacitor is discharged to a low voltage level by internal diodes. Other protection features include 1.1-A peak over-current protection (OCP) at each cycle, output over voltage protection (OVP), thermal shutdown, and under voltage lockout (UVLO).

With its 1.6-V minimum input voltage, the IC can be powered by two alkaline batteries, a single Li-ion battery, or 3.3-V and 5-V regulated supply. The output can be boosted up to 17-V. The TPS61093 is available in 2.5 mm × 2.5 mm SON package with thermal pad.

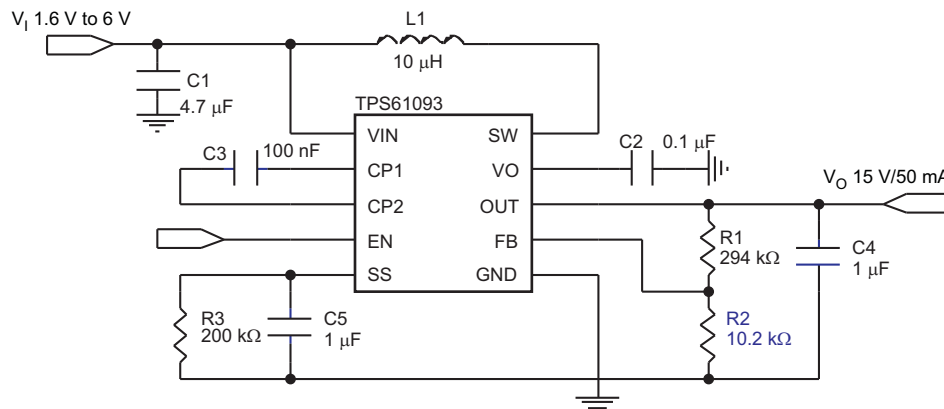


Figure 1. Typical Application

ORDERING INFORMATION⁽¹⁾

| T _A | PART NUMBER ⁽²⁾ | PACKAGE MARKING |
|----------------|----------------------------|-----------------|
| –40°C to 85°C | TPS61093DSK | OAP |

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com
- (2) The DSK package is available in tape and reel. Add R suffix (TPS61093DSKR) to order quantities of 3000 parts per reel, or add T suffix (TPS61093DSKT) to order 250 parts per reel.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

| | VALUE / UNITS |
|--|----------------|
| Supply voltage on pin VIN ⁽²⁾ | –0.3 V to 7 V |
| Voltage on pins CP2, EN, and SS ⁽²⁾ | –0.3 V to 7 V |
| Voltage on pin CP1 and FB ⁽²⁾ | –0.3 V to 3 V |
| Voltage on pin SW, VO, and OUT ⁽²⁾ | –0.3 V to 20 V |
| HBM ESD Rating ⁽³⁾ | 2 kV |
| Operating temperature range, T _A | –40°C to 85°C |
| Maximum operating junction temperature, T _J | 150°C |
| Storage temperature, T _{st} | –55°C to 150°C |

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to network ground terminal.
- (3) The Human body model (HBM) is a 100-pF capacitor discharged through a 1.5-kΩ resistor into each pin. The testing is done according JEDECs EIA/JESD22-A114.

DISSIPATION RATINGS

| PACKAGE | THERMAL RESISTANCE θ _{JA} ⁽¹⁾ | THERMAL RESISTANCE θ _{JP} | THERMAL RESISTANCE θ _{JC} | POWER RATING T _A ≤ 25°C ⁽¹⁾ | DERATING FACTOR ABOVE T _A = 25°C ⁽¹⁾ |
|---------|---|--|--|--|---|
| DSK | 60.6°C/W | 6.3°C/W | 40°C/W | 1650 mW | 17 mW/°C |

- (1) Thermal ratings are determined assuming a high K PCB design according to JEDEC standard JESD51-7.

RECOMMENDED OPERATING CONDITIONS

over operating free-air temperature range (unless otherwise noted)

| | MIN | NOM | MAX | UNIT |
|---|-----|-----|-----|------|
| V _i Input voltage range | 1.6 | | 6 | V |
| V _o Output voltage range at VO pin | | | 17 | V |
| L Inductor ⁽¹⁾ | 2.2 | 4.7 | 10 | μH |
| C _{in} Input capacitor | 4.7 | | | μF |
| C _o Output capacitor at OUT pin ⁽¹⁾ | 1 | | 10 | μF |
| C _{fly} Flying capacitor at CP1 and CP2 pins | 10 | | | nF |
| T _J Operating junction temperature | –40 | | 125 | °C |
| T _A Operating free-air temperature | –40 | | 85 | °C |

- (1) These values are recommended values that have been successfully tested in several applications. Other values may be acceptable in other applications but should be fully tested by the user.


ELECTRICAL CHARACTERISTICS

V_{IN} = 3.6 V, EN = V_{IN}, T_A = –40°C to 85°C, typical values are at T_A = 25°C (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|------------------------------------|--|--|------|------|------|------|
| SUPPLY CURRENT | | | | | | |
| V _{IN} | Input voltage range, V _{IN} | | 1.6 | | 6 | V |
| I _Q | Operating quiescent current into V _{IN} | Device PWM switching no load | | 0.9 | 1.5 | mA |
| I _{SD} | Shutdown current | EN = GND, V _{IN} = 6 V | | | 1 | μA |
| UVLO | Undervoltage lockout threshold | V _{IN} falling | | 1.5 | 1.55 | V |
| V _{hys} | Undervoltage lockout hysteresis | | | 50 | | mV |
| ENABLE AND PWM CONTROL | | | | | | |
| V _{ENH} | EN logic high voltage | V _{IN} = 1.6 V to 6 V | 1.2 | | | V |
| V _{ENL} | EN logic low voltage | V _{IN} = 1.6 V to 6 V | | | 0.3 | V |
| R _{EN} | EN pull down resistor | | 400 | 800 | 1600 | kΩ |
| T _{off} | EN pulse width to shutdown | EN high to low | | | 1 | ms |
| VOLTAGE CONTROL | | | | | | |
| V _{REF} | Voltage feedback regulation voltage | | 0.49 | 0.5 | 0.51 | V |
| I _{FB} | Voltage feedback input bias current | | | | 100 | nA |
| f _S | Oscillator frequency | | 1.0 | 1.2 | 1.4 | MHz |
| D _{max} | Maximum duty cycle | V _{FB} = 0.1 V, T _A = 85°C | 90% | 93% | | |
| T _{min_on} | Minimum on pulse width | | | 65 | | ns |
| POWER SWITCH, ISOLATION FET | | | | | | |
| R _{DS(ON)N} | N-channel MOSFET on-resistance | V _{IN} = 3 V | | 0.25 | 0.4 | Ω |
| R _{DS(ON)iso} | Isolation FET on-resistance | VO = 5 V | | 2.5 | 4 | Ω |
| | | VO = 3.5 V | | 4.5 | | |
| I _{LN_N} | N-channel leakage current | V _{DS} = 20 V, T _A = 25°C | | | 1 | μA |
| I _{LN_iso} | Isolation FET leakage current | V _{DS} = 20 V, T _A = 25°C | | | 1 | μA |
| V _F | Power diode forward voltage | Current = 500 mA | | 0.8 | | V |
| OC, ILIM, OVP SC AND SS | | | | | | |
| I _{LIM} | N-Channel MOSFET current limit | | 0.9 | 1.1 | 1.5 | A |
| V _{ovp} | Over voltage protection threshold | Measured on the VO pin | 18 | 19 | | V |
| V _{ovp_hys} | Over voltage protection hysteresis | | | 0.6 | | V |
| I _{OL} | Over load protection | | 200 | 300 | | mA |
| THERMAL SHUTDOWN | | | | | | |
| T _{shutdown} | Thermal shutdown threshold | | | 150 | | °C |
| T _{hysteresis} | Thermal shutdown hysteresis | | | 15 | | °C |

DEVICE INFORMATION


PIN ASSIGNMENTS

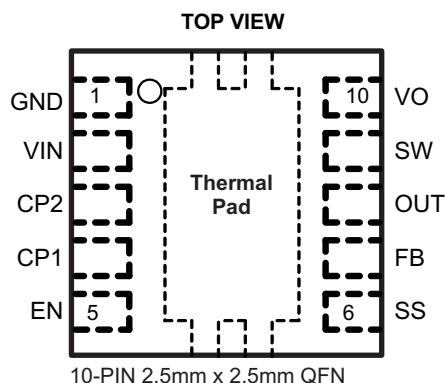

PIN FUNCTIONS

| PIN | | I/O | DESCRIPTION |
|-------------|------|-----|--|
| NAME | NO. | | |
| VIN | 2 | I | IC Supply voltage input. |
| VO | 10 | O | Output of the boost converter. When the output voltage exceeds the over voltage protection (OVP) threshold, the power switch turns off until VO drops below the over voltage protection hysteresis. |
| OUT | 8 | O | Isolation switch is between this pin and VO pin. Connect load to this pin for input/output isolation during IC shutdown. See <i>WITHOUT ISOLATION FET</i> for the tradeoff between isolation and efficiency. |
| GND | 1 | – | Ground of the IC. |
| CP1, CP2 | 3, 4 | | Connect to flying capacitor for internal charge pump. |
| EN | 5 | I | Enable pin (HIGH = enable). When the pin is pulled low for 1 ms, the IC turns off and consumes less than 1-μA current. |
| SS | 6 | I | Soft start pin. A RC network connecting to the SS pin programs soft start timing. See <i>START UP</i> . |
| FB | 7 | I | Voltage feedback pin for output regulation, 0.5-V regulated voltage. An external resistor divider connected to this pin programs the regulated output voltage. |
| SW | 9 | I | Switching node of the IC where the internal PWM switch operates. |
| Thermal Pad | – | – | It should be soldered to the ground plane. If possible, use thermal via to connect to ground plane for ideal power dissipation. |

FUNCTIONAL BLOCK DIAGRAM

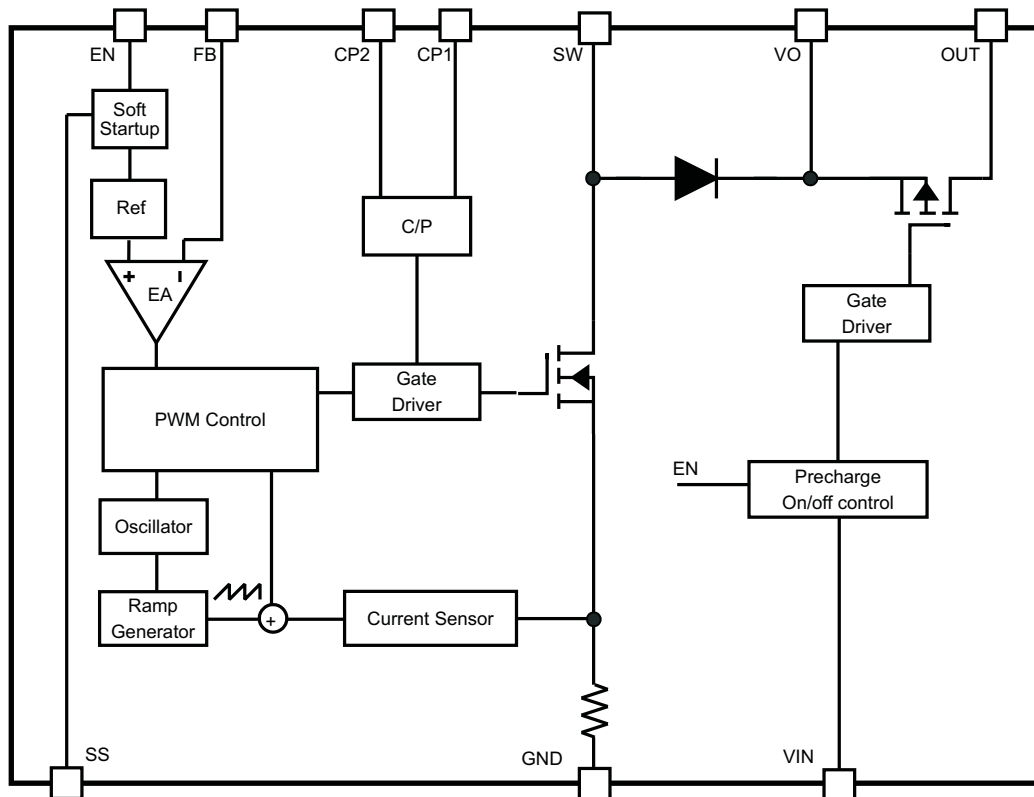

TYPICAL CHARACTERISTICS

TABLE OF GRAPHS

| Figure 1, L = TOKO #A915_Y-100M, unless otherwise noted | | | FIGURE |
|---|-------------------------|--|--------|
| η | Efficiency | vs Load current at OUT = 15 V | 2 |
| η | Efficiency | vs Load current at OUT = 10 V | 3 |
| V_{FB} | FB voltage | vs Free-air temperature | 4 |
| V_{FB} | FB voltage | vs Input voltage | 5 |
| I_{LIM} | Switch current limit | vs Free-air temperature | 6 |
| | Line transient response | VIN = 3.3 V to 3.6 V; Load = 50 mA | 7 |
| | Load transient response | VIN = 2.5 V; Load = 10 mA to 50 mA; Cff = 100 pF | 8 |
| | PWM control in CCM | VIN = 3.6 V; Load = 50 mA | 9 |
| | PWM control in DCM | VIN = 3.6 V; Load = 1 mA | 10 |
| | Pulse skip mode | VIN = 4.5 V; OUT = 10 V; No load | 11 |
| | Soft start-up | VIN = 3.6 V; Load = 50 mA | 12 |

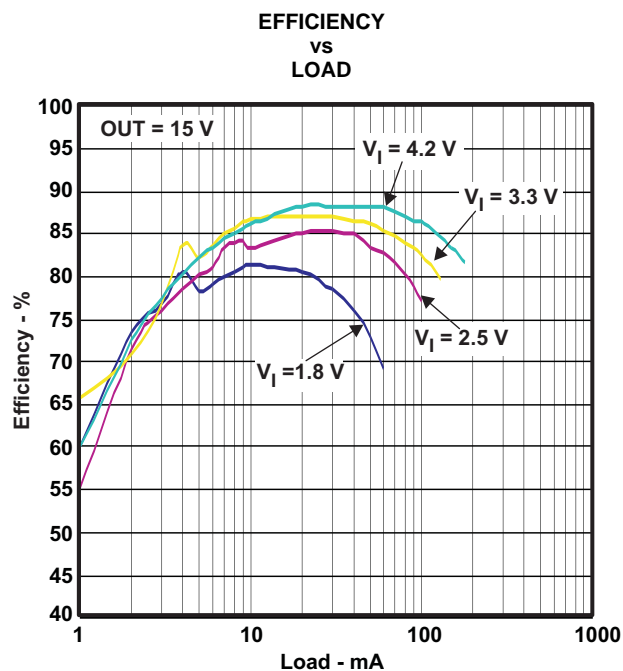


Figure 2.

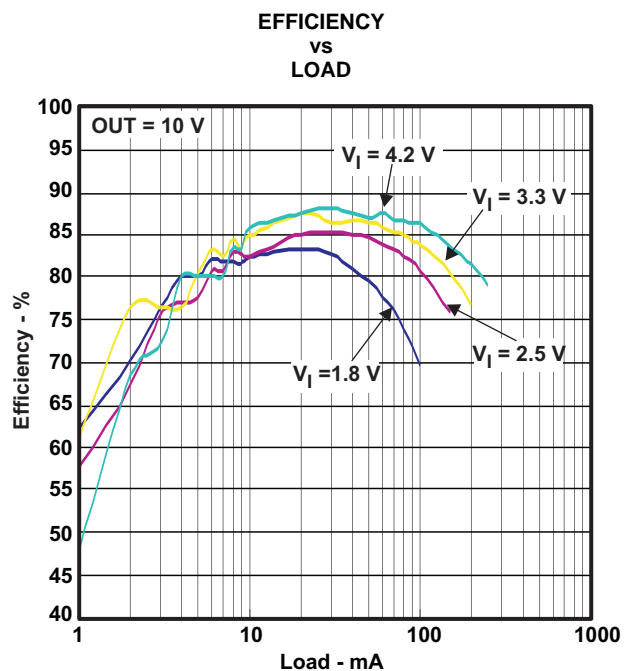


Figure 3.

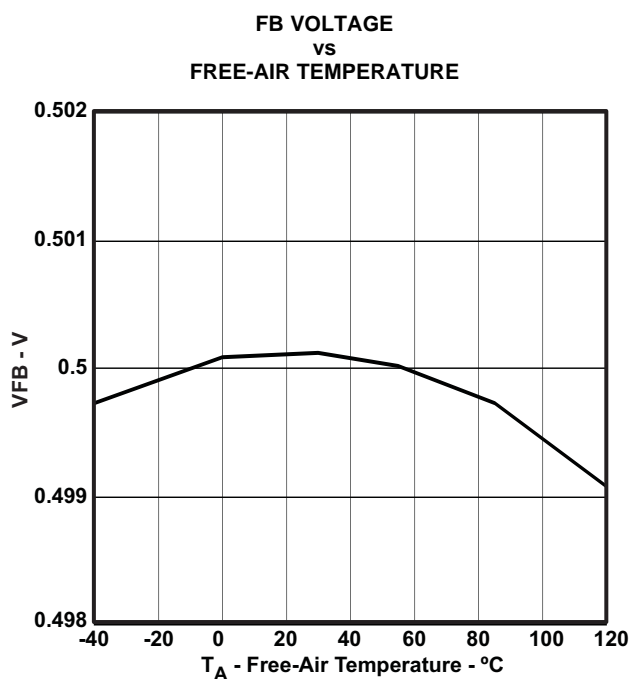


Figure 4.

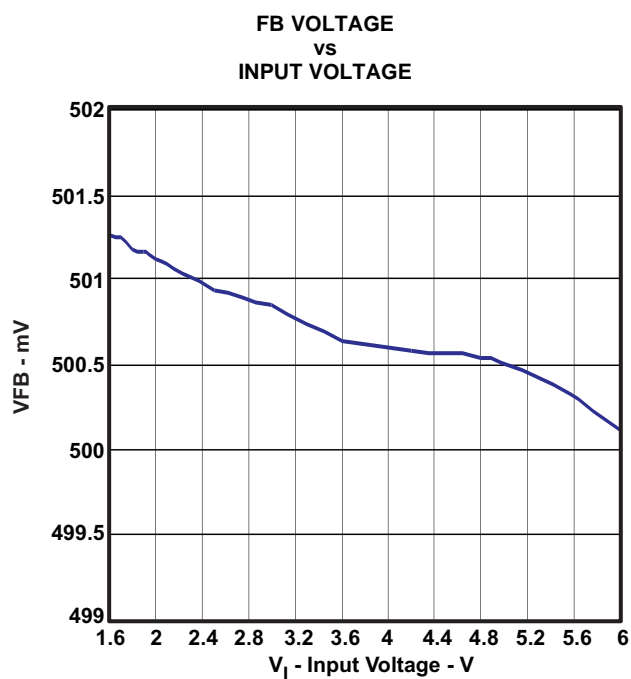


Figure 5.

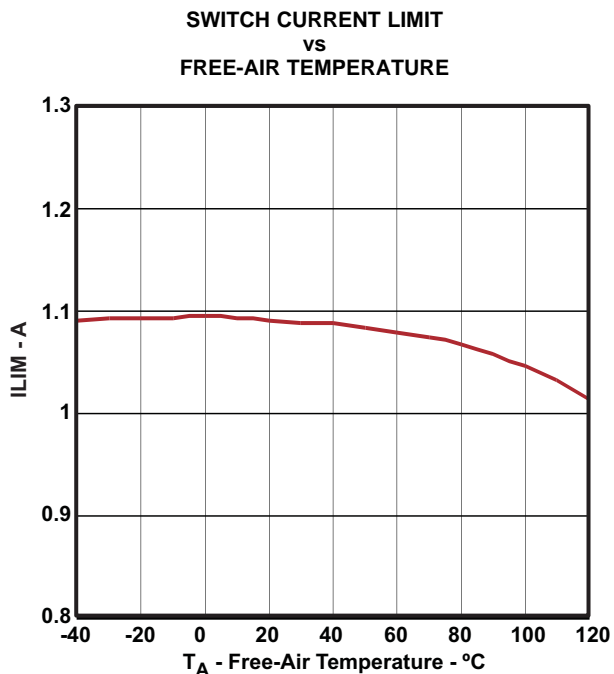


Figure 6.

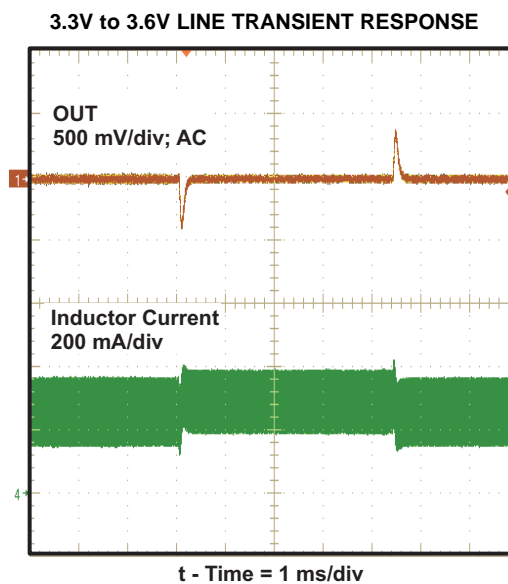


Figure 7.

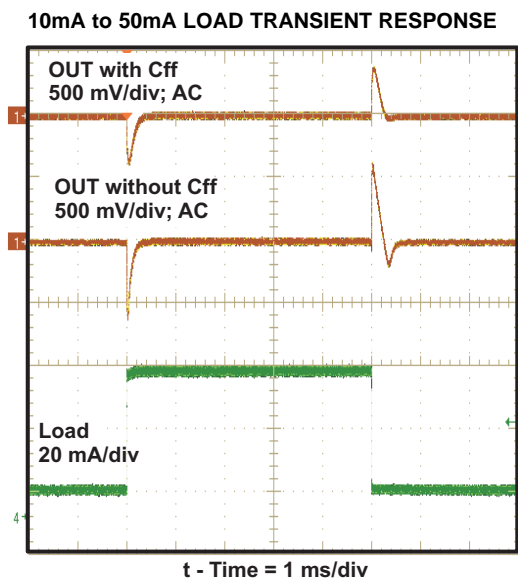


Figure 8.

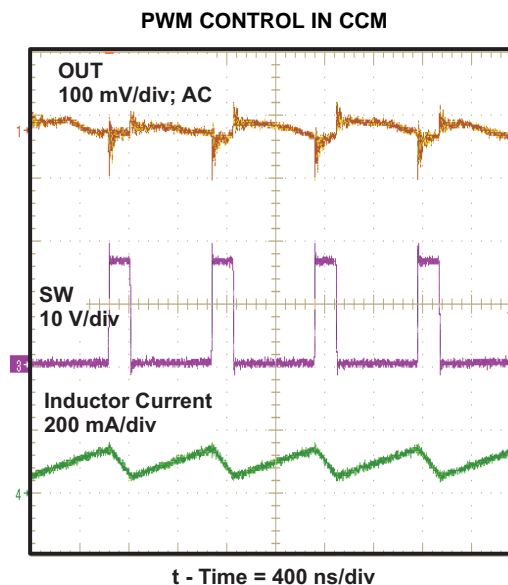


Figure 9.

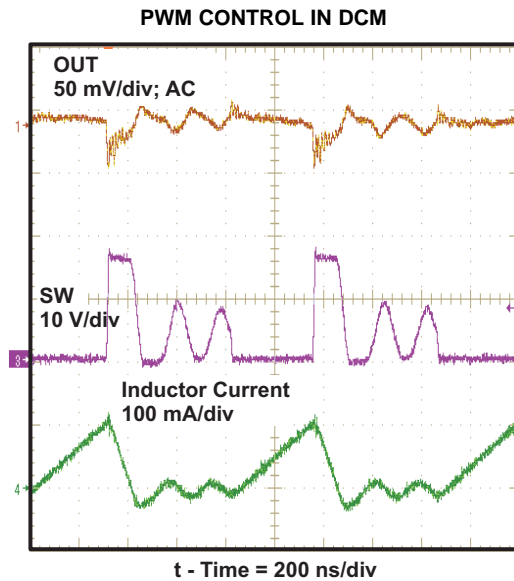


Figure 10.

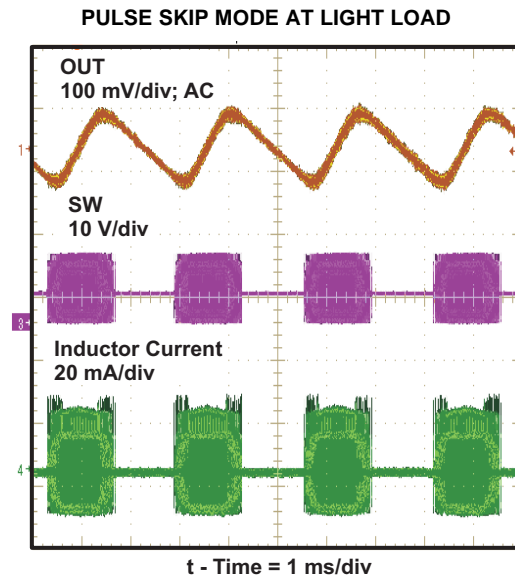


Figure 11.

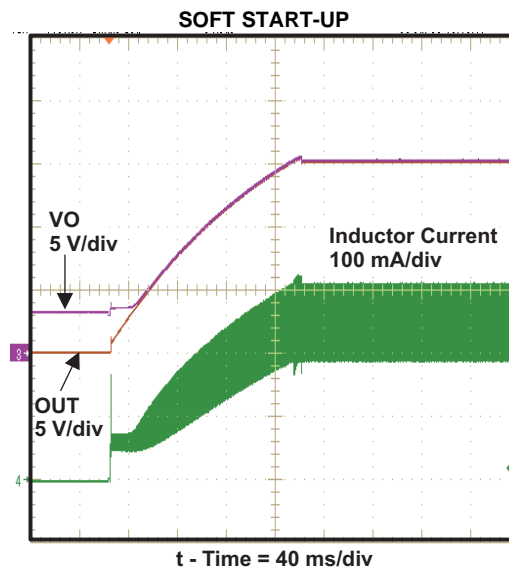


Figure 12.

DETAILED DESCRIPTION

OPERATION

The TPS61093 is a highly integrated boost regulator for up to 17-V output. In addition to the on-chip 1-A PWM switch and power diode, this IC also integrates an output-side isolation switch as shown in the functional block diagram. One common issue with conventional boost regulators is the conduction path from input to output even when the PWM switch is turned off. It creates three problems, which are inrush current during start-up, output leakage current during shutdown, and excessive over load current. In the TPS61093, the isolation switch turns off under shutdown-mode and over load conditions, thereby opening the current path. However, shorting the VO and OUT pins bypasses the isolation switch and enhances efficiency. Because the isolation switch is on the output side, the IC's VIN pin and power stage input power (up to 10 V) can be separated.

The TPS61093 adopts current-mode control with constant pulse-width-modulation (PWM) frequency. The switching frequency is fixed at 1.2-MHz typical. PWM operation turns on the PWM switch at the beginning of each switching cycle. The input voltage is applied across the inductor and the inductor current ramps up. In this mode, the output capacitor is discharged by the load current. When the inductor current hits the threshold set by the error amplifier output, the PWM switch is turned off, and the power diode is forward-biased. The inductor transfers its stored energy to replenish the output capacitor. This operation repeats in the next switching cycle. The error amplifier compares the FB-pin voltage with an internal reference, and its output determines the duty cycle of the PWM switching. This closed-loop system requires frequency compensation for stable operation. The device has a built-in compensation circuit that can accommodate a wide range of input and output voltages. To avoid the sub-harmonic oscillation intrinsic to current-mode control, the IC also integrates slope compensation, which adds an artificial slope to the current ramp.

SHUTDOWN AND LOAD DISCHARGE

When the EN pin is pulled low for 1-ms, the IC stops the PWM switch and turns off the isolation switch, providing isolation between input and output. The internal current path consisting of the isolation switch's body diode and several parasitic diodes quickly discharges the output voltage to less than 3.3-V. Afterwards, the voltage is slowly discharged to zero by the leakage current. This protects the IC and the external components from high voltage in shutdown mode.

In shutdown mode, less than 1- μ A of input current is consumed by the IC.

OVER LOAD AND OVER VOLTAGE PROTECTION

If the over load current passing through the isolation switch is above the over load limit (I_{OL}) for 3- μ s (typ), the TPS61093 is switched off until the fault is cleared and the EN pin toggles. The function only is triggered 52-ms after the IC is enabled.

To prevent the PWM switch and the output capacitor from exceeding maximum voltage ratings, an over voltage protection circuit turns off the boost switch as soon as the output voltage at the VO pin exceeds the OVP threshold. Simultaneously, the IC opens the isolation switch. The regulator resumes PWM switching after the VO pin voltage falls 0.6-V below the threshold.

UNDER VOLTAGE LOCKOUT (UVLO)

An under voltage lockout prevents improper operation of the device for input voltages below 1.55-V. When the input voltage is below the under voltage threshold, the entire device, including the PWM and isolation switches, remains off.

THERMAL SHUTDOWN

An internal thermal shutdown turns off the isolation and PWM switches when the typical junction temperature of 150°C is exceeded. The thermal shutdown has a hysteresis of 15°C, typical.

APPLICATION INFORMATION

SWITCH DUTY CYCLE

The maximum switch duty cycle (D) of the TPS61093 is 90% (minimum). The duty cycle of a boost converter under continuous conduction mode (CCM) is given by:

$$D = \frac{V_{out} + 0.8\text{ V} - V_{in}}{V_{out} + 0.8\text{ V}} \quad (1)$$

The duty cycle must be lower than the specification in the application; otherwise the output voltage cannot be regulated.

The TPS61093 has a minimum ON pulse width once the PWM switch is turned on. As the output current drops, the device enters discontinuous conduction mode (DCM). If the output current drops extremely low, causing the ON time to be reduced to the minimum ON time, the TPS61093 enters pulse-skipping mode. In this mode, the device keeps the power switch off for several switching cycles to keep the output voltage in regulation. See [Figure 11](#). The output current when the IC enters skipping mode is calculated with [Equation 2](#).

$$I_{out_skip} = \frac{V_{in}^2 \times T_{min_on}^2 \times f_{SW}}{2 \times (V_{out} + 0.8\text{ V} - V_{in}) \times L} \quad (2)$$

Where

T_{min_on} = Minimum ON pulse width specification (typically 65-ns);

L = Selected inductor value;

f_{SW} = Converter switching frequency (typically 1.2-MHz)

OUTPUT PROGRAM

To program the output voltage, select the values of R1 and R2 (see [Figure 13](#)) according to [Equation 3](#).

$$V_{out} = 0.5\text{ V} \times \left(\frac{R1}{R2} + 1 \right)$$

$$R1 = R2 \times \left(\frac{V_{out}}{0.5\text{ V}} - 1 \right) \quad (3)$$

A recommended value for R2 is approximately 10-kΩ which sets the current in the resistor divider chain to 0.5V/10kΩ = 50-μA. The output voltage tolerance depends on the VFB accuracy and the resistor divider.

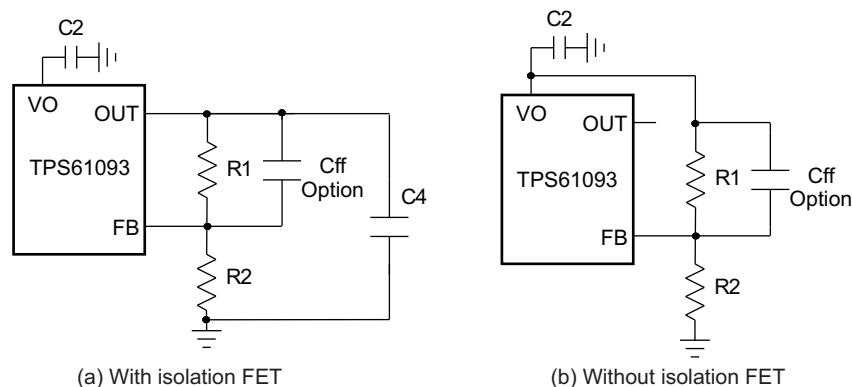



Figure 13. Resistor Divider to Program Output Voltage

WITHOUT ISOLATION FET

The efficiency of the TPS61093 can be improved by connecting the load to the VO pin instead of the OUT pin. The power loss in the isolation FET is then negligible, as shown in Figure 13. The tradeoffs when bypassing the isolation FET are:

- Leakage path between input and output causes the output to be a diode drop below the input voltage when the IC is in shutdown
- No overload circuit protection

When the load is connected to the VO pin, the output capacitor on the VO pin should be above 1-μF.

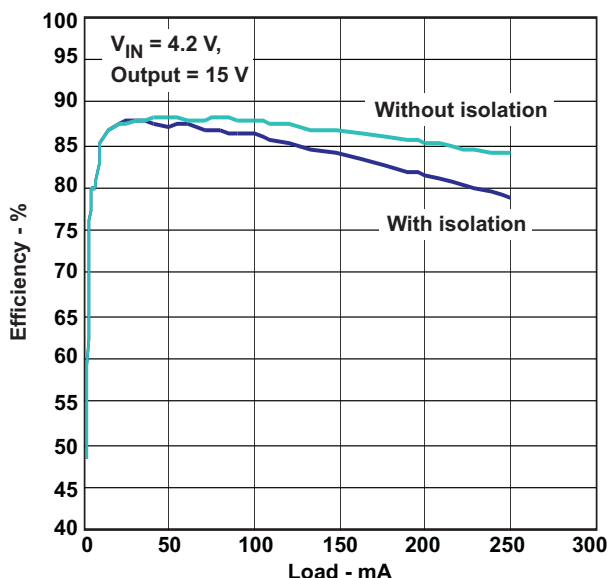

START UP

The TPS61093 turns on the isolation FET and PWM switch when the EN pin is pulled high. During the soft start period, the R and C network on the SS pin is charged by an internal bias current of 5-μA (typ). The RC network sets the reference voltage ramp up slope. Since the output voltage follows the reference voltage via the FB pin, the output voltage rise time follows the SS pin voltage until the SS pin voltage reaches 0.5-V. The soft start time is given by Equation 4.

$$t_{ss} = \frac{0.5 \text{ V} \times C5}{5 \mu\text{A}} \quad (4)$$

Where C5 is the capacitor connected to the SS pin.

When the EN pin is pulled low to switch the IC off, the SS pin voltage is discharged to zero by the resistor R3. The discharge period depends on the RC time constant. Note that if the SS pin voltage is not discharged to zero before the IC is enabled again, the soft start circuit may not slow the output voltage startup and may not reduce the startup inrush current.

INDUCTOR SELECTION

Because the selection of the inductor affects steady state operation, transient behavior, and loop stability, the inductor is the most important component in power regulator design. There are three important inductor specifications, inductor value, saturation current, and dc resistance. Considering inductor value alone is not enough.

The saturation current of the inductor should be higher than the peak switch current as calculated in Equation 5.

$$I_{L_peak} = I_{L_DC} + \frac{\Delta I_L}{2}$$

$$I_{L_DC} = \frac{V_{out} \times I_{out}}{V_{in} \times \eta}$$

$$\Delta I_L = \frac{1}{L \times f_{sw} \times \left(\frac{1}{V_{out} + 0.8 V - V_{IN}} + \frac{1}{V_{IN}} \right)}$$
(5)

Where

I_{L_peak} = Peak switch current
 I_{L_DC} = Inductor average current
 ΔI_L = Inductor peak to peak current
 η = Estimated converter efficiency

Normally, it is advisable to work with an inductor peak-to-peak current of less than 30% of the average inductor current. A smaller ripple from a larger valued inductor reduces the magnetic hysteresis losses in the inductor and EMI. But in the same way, load transient response time is increased. Also, the inductor value should not be outside the 2.2-μH to 10-μH range in the recommended operating conditions table. Otherwise, the internal slope compensation and loop compensation components are unable to maintain small signal control loop stability over the entire load range. Table 1 lists the recommended inductor for the TPS61093.

Table 1. Recommended Inductors for the TPS61093

| PART NUMBER | L (μH) | DCR MAX (mΩ) | SATURATION CURRENT (A) | SIZE (L×W×H mm) | VENDOR |
|---------------|--------|--------------|------------------------|-----------------|-----------|
| #A915_Y-4R7M | 4.7 | 45 | 1.5 | 5.2x5.2x3.0 | Toko |
| #A915_Y-100M | 10 | 90 | 1.09 | 5.2x5.2x3.0 | Toko |
| VLS4012-4R7M | 4.7 | 132 | 1.1 | 4.0x4.0x1.2 | TDK |
| VLS4012-100M | 10 | 240 | 0.82 | 4.0x4.0x1.2 | TDK |
| CDRH3D23/HP | 10 | 198 | 1.02 | 4.0x4.0x2.5 | Sumida |
| LPS5030-103ML | 10 | 127 | 1.4 | 5.0x5.0x3.0 | Coilcraft |

INPUT AND OUTPUT CAPACITOR SELECTION

The output capacitor is mainly selected to meet the requirements for output ripple and loop stability. This ripple voltage is related to the capacitor's capacitance and its equivalent series resistance (ESR). Assuming a ceramic capacitor with zero ESR, the minimum capacitance needed for a given ripple can be calculated by:

$$C_{out} = \frac{D \times I_{out}}{F_s \times V_{ripple}}$$
(6)

Where V_{ripple} = peak to peak output ripple. The ESR impact on the output ripple must be considered if tantalum or electrolytic capacitors are used.

Care must be taken when evaluating a ceramic capacitor's derating under dc bias, aging, and ac signal. For example, larger form factor capacitors (in 1206 size) have their self resonant frequencies in the range of the switching frequency. So the effective capacitance is significantly lower. The dc bias can also significantly reduce capacitance. A ceramic capacitor can lose as much as 50% of its capacitance at its rated voltage. Therefore, always leave margin on the voltage rating to ensure adequate capacitance at the required output voltage.

A 4.7-μF (minimum) input capacitor is recommended. The output requires a capacitor in the range of 1 μF to 10 μF. The output capacitor affects the small signal control loop stability of the boost regulator. If the output capacitor is below the range, the boost regulator can potentially become unstable.

The popular vendors for high value ceramic capacitors are:

- TDK (<http://www.component.tdk.com/components.php>)
- Murata (<http://www.murata.com/cap/index.html>)

SMALL SIGNAL STABILITY

The TPS61093 integrates slope compensation and the RC compensation network for the internal error amplifier. Most applications will be control loop stable if the recommended inductor and input/output capacitors are used. For those few applications that require components outside the recommended values, the internal error amplifier's gain and phase are presented in [Figure 14](#).

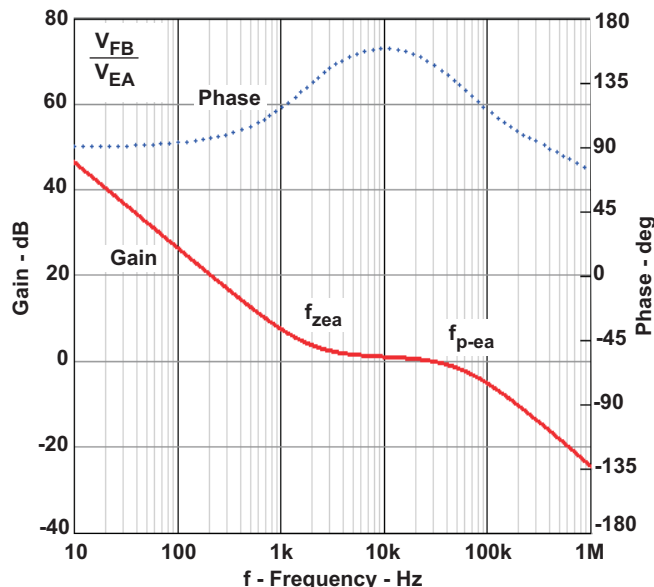


Figure 14. Bode Plot of Error Amplifier Gain and Phase

The RC compensation network generates a pole f_{p-ea} of 57-kHz and a zero f_{z-ea} of 1.9-kHz, shown in [Figure 14](#). Use [Equation 7](#) to calculate the output pole, f_p , of the boost converter. If $f_p \ll f_{z-ea}$, due to a large capacitor beyond 10 μ F, for example, a feed forward capacitor on the resistor divider, as shown in [Figure 14](#), is necessary to generate an additional zero f_{z-f} to improve the loop phase margin and improve the load transient response. The low frequency pole f_{p-f} and zero f_{z-f} generated by the feed forward capacitor are given by [Equation 8](#) and [Equation 9](#):

$$f_p = \frac{1}{\pi \times R_o \times C_o} \quad (a) \quad (7)$$

$$f_{p-f} = \frac{1}{2\pi \times R2 \times C_{ff}} \quad (b) \quad (8)$$

$$f_{z-f} = \frac{1}{2\pi \times R1 \times C_{ff}} \quad (c) \quad (9)$$


Where C_{ff} = the feed-forward capacitor.

For example, in the typical application circuitry (see [Figure 1](#)), the output pole f_p is approximately 1-kHz. When the output capacitor is increased to 100- μ F, then the f_p is reduced to 10-Hz. Therefore, a feed-forward capacitor of 10-nF compensates for the low frequency pole.

A feed forward capacitor that sets f_{z-f} near 10-kHz improves the load transient response in most applications, as shown in [Figure 8](#).


LAYOUT CONSIDERATIONS

As for all switching power supplies, especially those running at high switching frequency and high currents, layout is an important design step. If layout is not carefully done, the regulator could suffer from instability as well as noise problems. To maximize efficiency, switch rise and fall times are very fast. To prevent radiation of high frequency noise (e.g., EMI), proper layout of the high frequency switching path is essential. Minimize the length and area of all traces connected to the SW pin and always use a ground plane under the switching regulator to minimize interplane coupling. The high current path including the switch and output capacitor contains nanosecond rise and fall times and should be kept as short as possible. The input capacitor needs not only to be close to the VIN pin, but also to the GND pin in order to reduce input supply ripple.

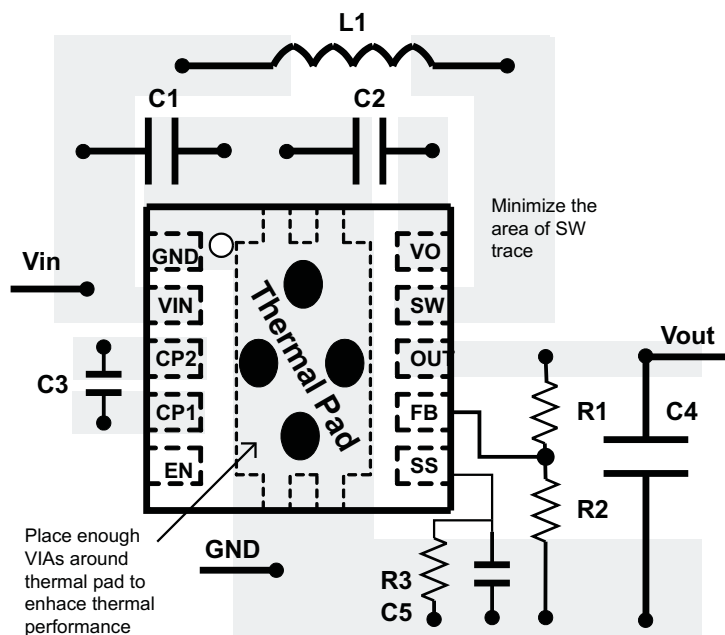

ADDITIONAL APPLICATION

15-V Boost Converter with 100- μ F Output Capacitor

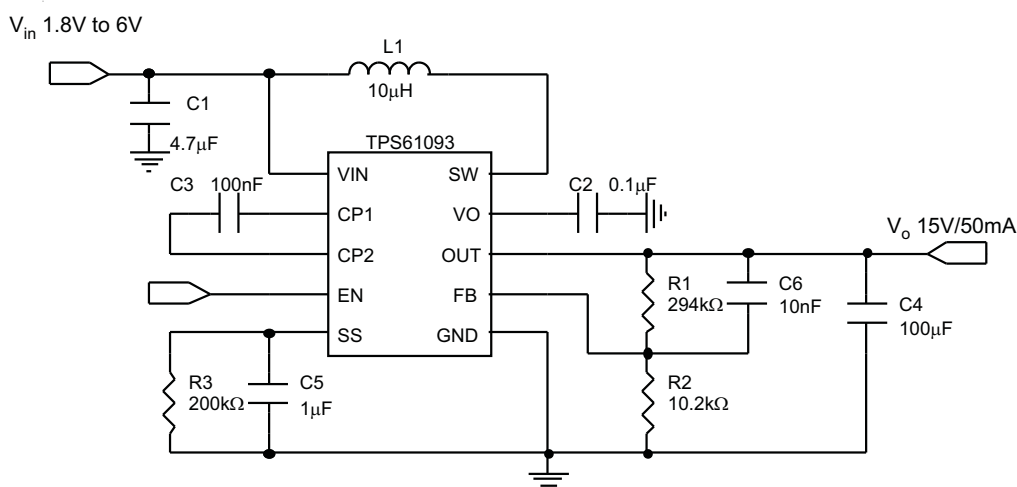

10 V, -10 V Dual Output Boost Converter

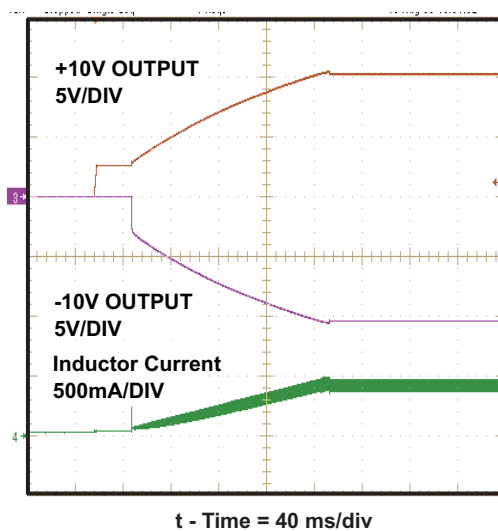
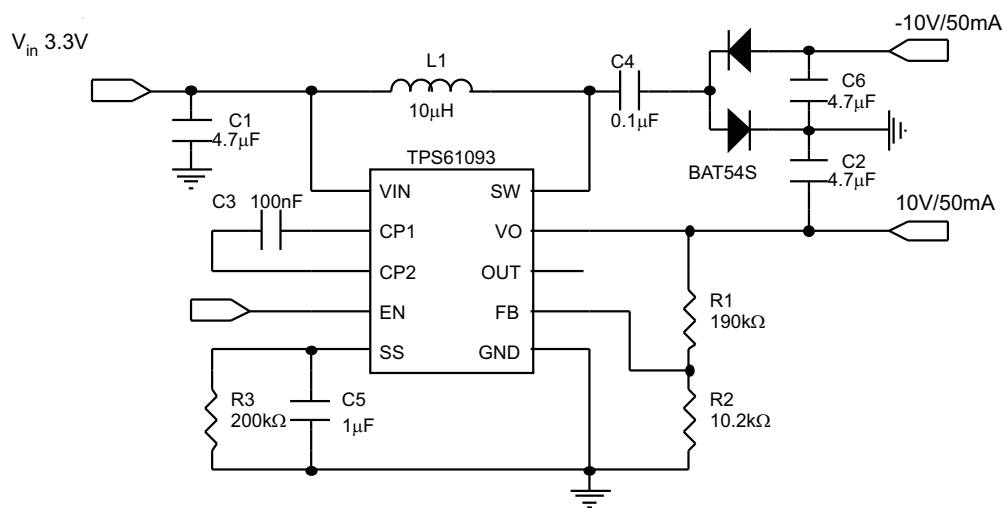


Figure 15. Soft Startup Waveform, 10 V, -10 V Dual Output Boost Converter

REVISION HISTORY

| Changes from Original (September 2009) to Revision A | Page |
|--|------|
| • Added information to OPERATION description | 9 |
| • Changed OUTPUT PROGRAM equations | 10 |
| • Changed OUTPUT PROGRAM description | 10 |

PACKAGING INFORMATION

| Orderable Device | Status ⁽¹⁾ | Package Type | Package Drawing | Pins | Package Qty | Eco Plan ⁽²⁾ | Lead/ Ball Finish | MSL Peak Temp ⁽³⁾ | Samples (Requires Login) |
|------------------|-----------------------|--------------|-----------------|------|-------------|----------------------------|----------------------|------------------------------|-----------------------------|
| TPS61093DSKR | ACTIVE | SON | DSK | 10 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | |
| TPS61093DSKT | ACTIVE | SON | DSK | 10 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | |

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBsolete: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.



Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

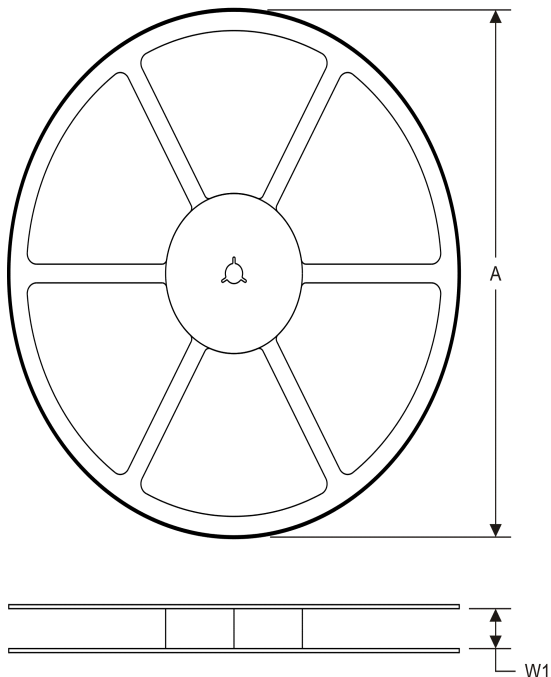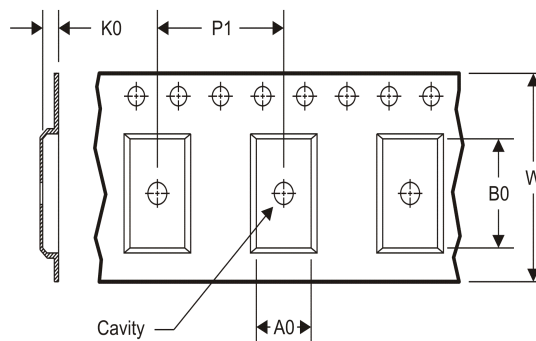TAPE AND REEL INFORMATION
REEL DIMENSIONS

TAPE DIMENSIONS


| | |
|----|---|
| A0 | Dimension designed to accommodate the component width |
| B0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |

TAPE AND REEL INFORMATION

*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS61093DSKR | SON | DSK | 10 | 3000 | 179.0 | 8.4 | 2.73 | 2.73 | 0.8 | 4.0 | 8.0 | Q2 |
| TPS61093DSKR | SON | DSK | 10 | 3000 | 330.0 | 8.4 | 2.8 | 2.8 | 1.0 | 4.0 | 8.0 | Q2 |
| TPS61093DSKT | SON | DSK | 10 | 250 | 180.0 | 8.4 | 2.8 | 2.8 | 1.0 | 4.0 | 8.0 | Q2 |
| TPS61093DSKT | SON | DSK | 10 | 250 | 179.0 | 8.4 | 2.73 | 2.73 | 0.8 | 4.0 | 8.0 | Q2 |

TAPE AND REEL BOX DIMENSIONS





*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS61093DSKR | SON | DSK | 10 | 3000 | 203.0 | 203.0 | 35.0 |
| TPS61093DSKR | SON | DSK | 10 | 3000 | 367.0 | 367.0 | 35.0 |
| TPS61093DSKT | SON | DSK | 10 | 250 | 210.0 | 185.0 | 35.0 |
| TPS61093DSKT | SON | DSK | 10 | 250 | 203.0 | 203.0 | 35.0 |

DSK (S-PDSO-N10)

PLASTIC QUAD FLATPACK

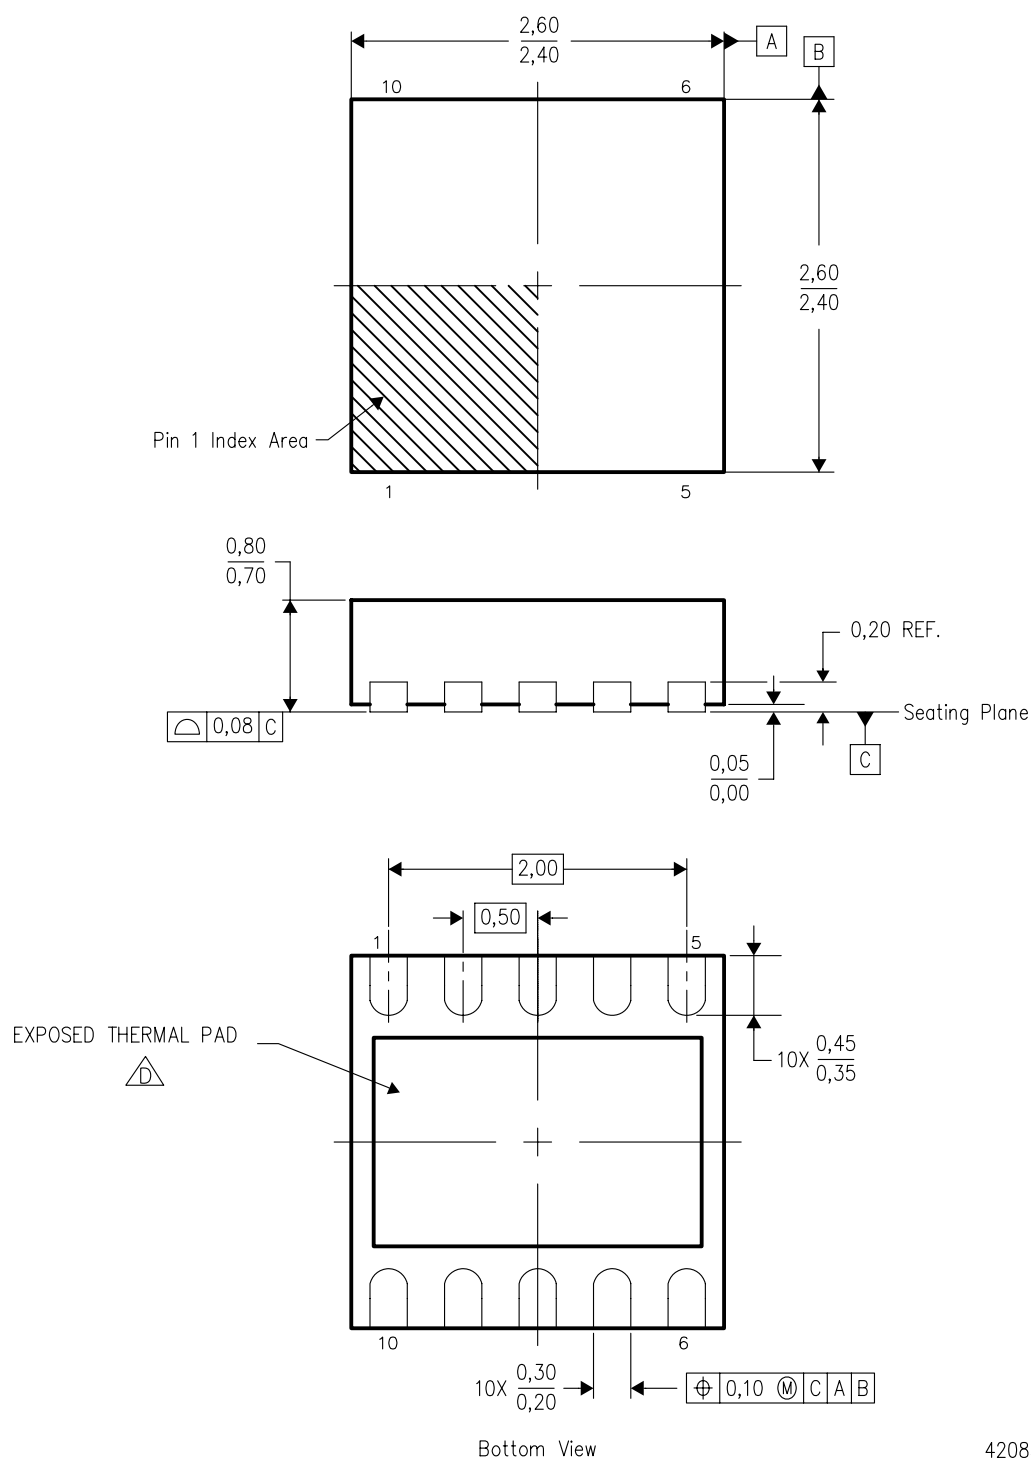

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. Small Outline No-Lead (SON) package configuration.
 -  D. The package thermal pad must be soldered to the board for thermal and mechanical performance. See the Product Data Sheet for details regarding the exposed thermal pad dimensions.

THERMAL PAD MECHANICAL DATA

DSK (R-PWSON-N10)


PLASTIC SMALL OUTLINE NO-LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

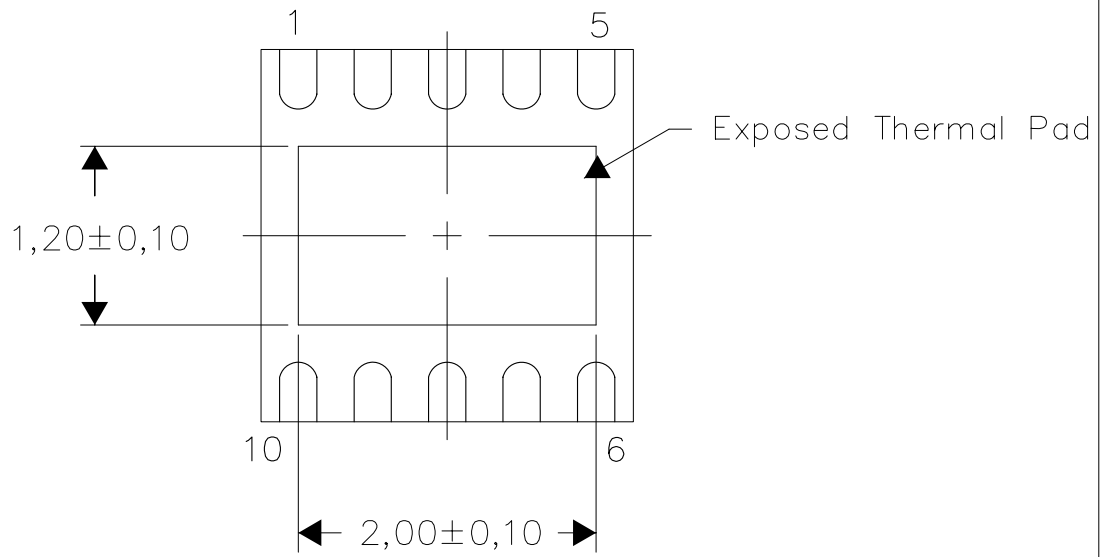

Bottom View


Exposed Thermal Pad Dimensions

4208579-2/D 10/10

NOTE: A. All linear dimensions are in millimeters

DSK (R-PWSON-N10)

PLASTIC SMALL OUTLINE NO-LEAD

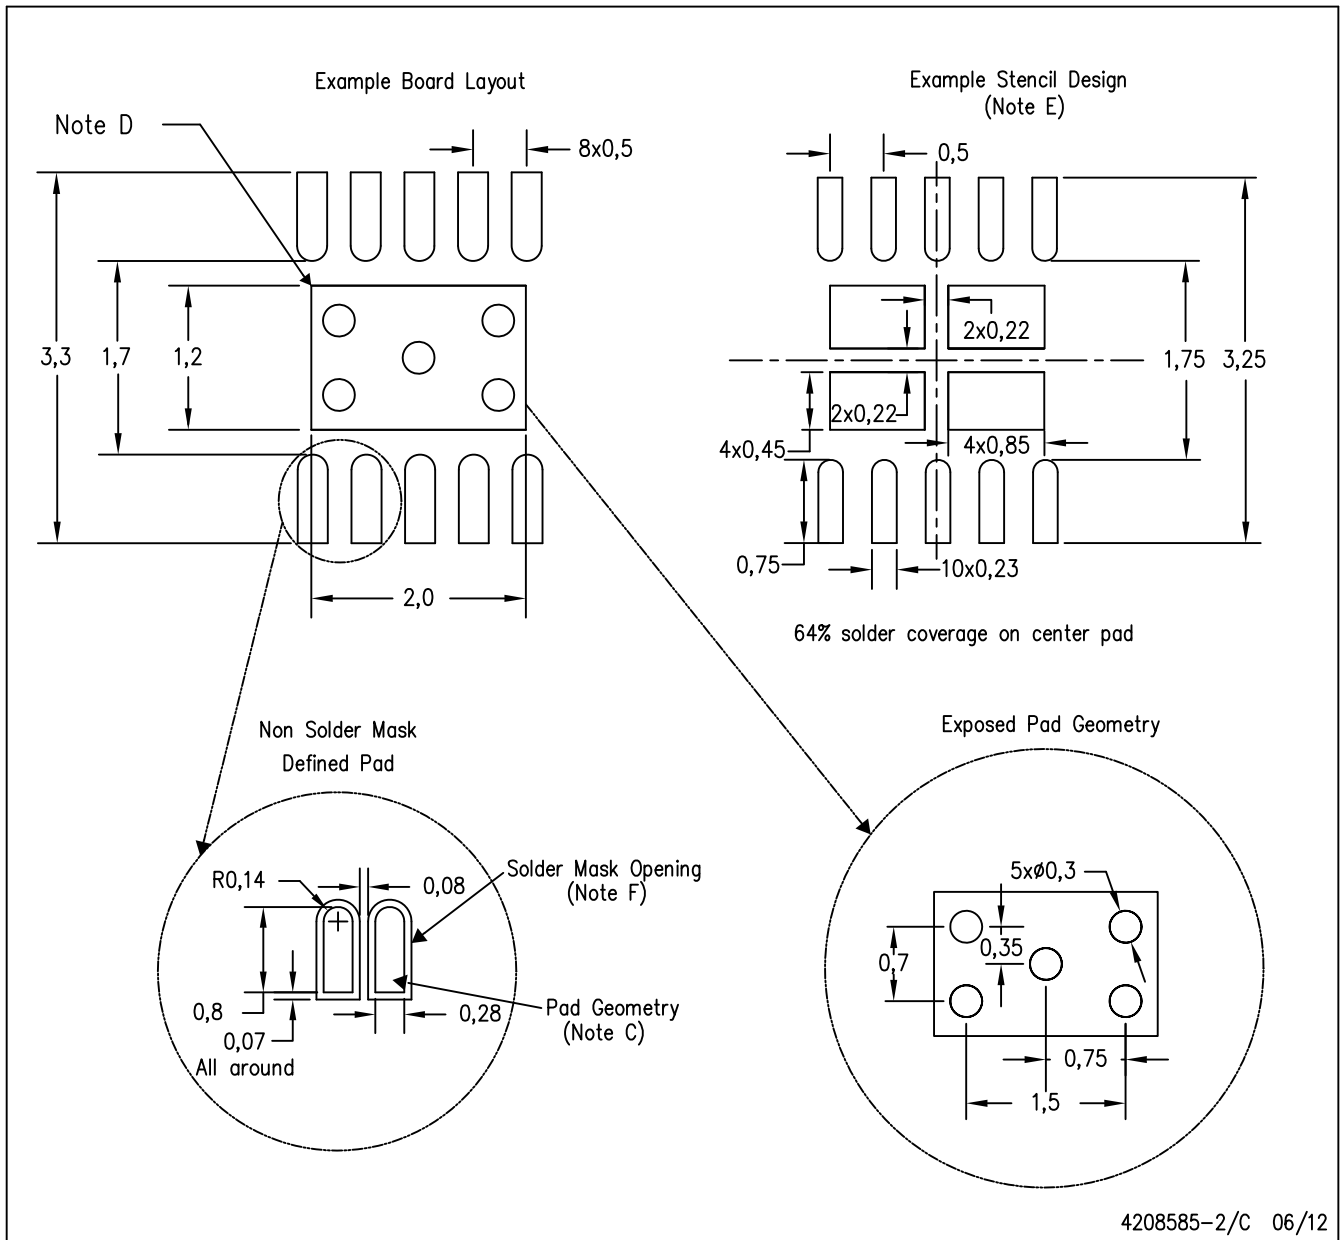

- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Publication IPC-SM-782 is recommended for alternate designs.
 - This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack Packages, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <<http://www.ti.com>>.
 - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
 - Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46C and to discontinue any product or service per JESD48B. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use. Components which have not been so designated are neither designed nor intended for automotive use; and TI will not be responsible for any failure of such components to meet such requirements.

Products

| | |
|------------------------|--|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| OMAP Mobile Processors | www.ti.com/omap |
| Wireless Connectivity | www.ti.com/wirelessconnectivity |

Applications

| | |
|-------------------------------|--|
| Automotive and Transportation | www.ti.com/automotive |
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Video and Imaging | www.ti.com/video |

TI E2E Community

e2e.ti.com