



**DC COMPONENTS CO., LTD.**

RECTIFIER SPECIALISTS

KBL / RS  
005 / 401

THRU

KBL / RS  
10 / 407

**TECHNICAL SPECIFICATIONS OF SINGLE-PHASE SILICON BRIDGE RECTIFIER**

VOLTAGE RANGE - 50 to 1000 Volts

CURRENT - 4.0 Amperes

**FEATURES**

- \* Ideal for printed circuit board
- \* Surge overload rating: 200 Amperes peak
- \* Molded structure

**MECHANICAL DATA**


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: MIL-STD-202E, Method 208 guaranteed
- \* Polarity: Symbols molded or marked on body
- \* Mounting position: Any
- \* Weight: 4.8 grams

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.



KBL

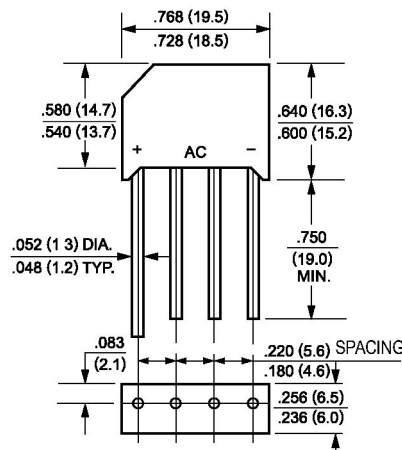

Dimensions in inches and (millimeters)

	SYMBOL	KBL005	KBL01	KBL02	KBL04	KBL06	KBL08	KBL10	UNITS	
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	Volts	
Maximum RMS Bridge Input Voltage	VRMS	35	70	140	280	420	580	700	Volts	
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	Volts	
Maximum Average Forward Output Current TA = 75°C	IO	4.0								Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	IFSM	200								Amps
Maximum Forward Voltage Drop per element at 3.0A DC	VF	1.0								Volts
Maximum DC Reverse Current at Rated	IR	@TA = 25°C				10				uAmps
DC Blocking Voltage per element		@TA = 100°C				500				
i <sup>2</sup> t Rating for Fusing (t<8.3ms)	i <sup>2</sup> t	93								A <sup>2</sup> Sec
Typical Junction Capacitance ( Note1)	CJ	40								pF
Typical Thermal Resistance (Note 2)	RθJA	19								°C/W
Operating Temperature Range	TJ	-55 to + 150								°C
Storage Temperature Range	TSTG	-55 to + 150								°C

NOTES : 1. Measured at 1 MHz and applied reverse voltage of 4.0 volts  
2. Thermal Resistance from Junction to Ambient with units mounted on 3.0x3.0x0.11" (7,5x7.5x0.3cm) AL plate.



NEXT



BACK



EXIT

