




LU0980M200-2 miniDIL

Pump Laser Module, Uncooled

Up to 200mW operation power

Features:

- Wavelength 974-985nm
- High-coupled rated output power
- Fiber Bragg Grating for wavelength stability
- Photodetector back-facet monitor
- Single mode fiber pigtail
- Telcordia GR-468-CORE compliant
- Very low power consumption

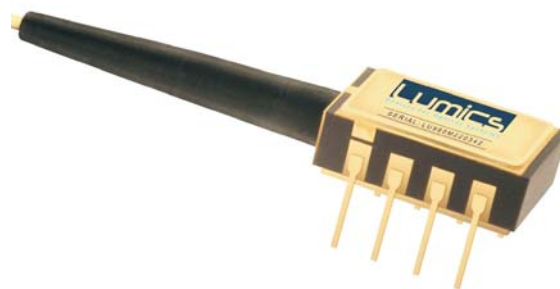

Description / Applications:

The Lumics LU0980M200-2 miniDIL laser diode module contains an optimized GaAs/AlGaAs/InGaAs quantum well high power laser. It has been specifically designed for applications in low noise high power Erbium Doped Fiber Amplifiers (EDFA). The extremely stringent reliability requirements are achieved through our patent pending innovative technology. This includes careful design, exactly defined manufacturing and extensive testing. The qualification contains a set of optoelectronic, thermal and mechanical tests. Each laser diode module is individually serialized for traceability and is shipped with a specified set of test data. Reliability tests according to Telcordia GR-468-CORE are ongoing at present.



Operating Parameters

Product code	Operating Power P_{op} [mW]	Maximum Operating Current I_{op} [mA] (2)	Minimum Kink Free Power P_k [mW] (1)	Kink Free Current I_k [mA] (1)
LU0980M100	100	290	110	319
LU0980M110	110	310	121	341
LU0980M120	120	330	132	363
LU0980M130	130	350	143	385
LU0980M140	140	375	154	413
LU0980M150	150	395	165	435
LU0980M160	160	415	176	457
LU0980M170	170	435	187	479
LU0980M180	180	460	198	506
LU0980M190	190	480	209	528
LU0980M200	200	500	220	550

Characteristics: ($T_{case} = 0$ to 70°C)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Threshold Current	@ 0°C	I_{th}			60	mA
	@ 25°C				65	
	@ 70°C				100	
LD Operating Voltage	$0-70^\circ\text{C}$	V_{op}			2	V
Center Wavelength (λ_c)	$0-70^\circ\text{C}$ (FBG)	λ	974	977	985	nm
Spectral Width ($\Delta\lambda_{FWHM}$)		λ		0.5	2	nm
Side Mode Suppression Ratio			20			dB
Power-In-Band	(Integration band +/- 1.5nm)		90			%
Photodetector Dark Current (ID)	$V_R = 5\text{V}$, T_{case}			5	40	nA
Photodetector Responsivity / dlp / dP)			0.1	0.3	20	$\mu\text{A}/\text{mW}$
Thermistor Resistance (R_{th})	$T_{submount} = 25^\circ\text{C}$		9.5		10.5	$\text{K}\Omega$
Total Power Consumption	$P_{op}=200\text{mW}$ BOL				910	mW
	$P_{op}=200\text{mW}$ EOL				992	mW
	$P_{op}=100\text{mW}$ BOL				560	mW
	$P_{op}=100\text{mW}$ EOL				604	mW
Fiber Type (Corning HI1060 / PM980)	Single Mode Fiber					
Fiber Bend Radius (HI1060/PM980)			25 / 40			mm
Pigtail Length after Grating			0.5			m
Module to Grating Distance			1		2	m

Important Notes:

- (1) kink-free is defined as $|dL/dI| < dL/dI| < 0.2$, where $|dL/dI|$ is the average slope efficiency below kink. The module is kink free (at least) up to a minimum kink-free power P_k that the module will achieve at a device-specific current, the kink-free current I_k . The individual value of I_k is noted on the hardcopy of the test report shipped with the device. All values of I_k are limited by values listed in Table 'Absolute Maximum Ratings' (see below).
- (2) Operating current (power) is the maximum current (power) where the slope efficiency does not decrease by more than 20% from average between 20mW and 120% of maximum operating power P_{op} . The maximum operating power P_{op} will be achieved at a device-specific current, the maximum operating current I_{op} . The individual value of I_{op} is noted on the hardcopy of the test report shipped with the device. All values of I_{op} are limited by the values listed in table 'Absolute Maximum Ratings'. The pump laser shall never be operated at a power higher than the maximum operating power P_{op} throughout its lifetime. At Begin of Life (BOL), the operating current shall never be higher than the device-specific maximum operating current I_{op} that is noted in the test report shipped with the device. At End of Life (EOL), the operating current shall never be higher than the device-specific kink free current I_k that is noted in the test report.
- (3) λ_{p95} is defined as 95% of total spectral power
- (4) Monitor diode for alarm and diagnostic purpose onl



Absolute Maximum Ratings: ($T_{case} = 0$ to $70^{\circ}C$)

Parameter	Symbol	Min	Max	Unit
Storage Temp.	T_{max}	-40	85	$^{\circ}C$
Operating Case Temp.	$T_{op, case}$	0	70	$^{\circ}C$
Lead Soldering Temp. (max. 10sec)			260	$^{\circ}C$
LD Forward Current	$I_{F, max}$		650	mA
LD Reverse Voltage	$V_{R, max}$		2	V
ESD Damage (1)			500	V
Maximum transient ($<3\mu s$) forward current			1.2	A


(1) A standard human body model (1.5kOhm, 1000pF) is used for ESD thresholds

Note:


Absolute maximum ratings may be applied to the laser module for short periods of time only. Exposure to maximum ratings for extended periods of time or exposure above one or more max ratings may cause damage or affect the reliability of the device.

Module Drawing (dimensions in mm):

Dimensions in mm
General tolerance
(unless otherwise specified): ± 0.2

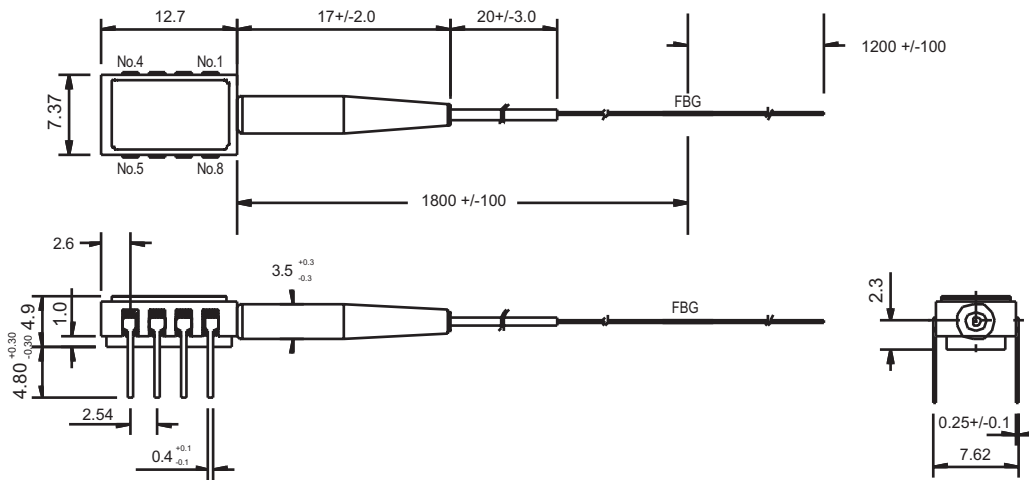



Pin Connections:

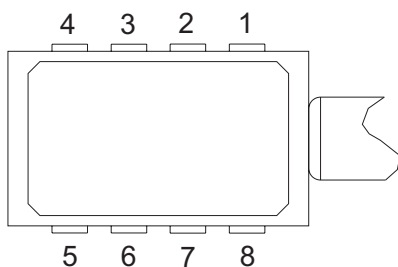

Pin	Connection
1	Thermistor
2	Package ground
3	Thermistor
4	Photodiode (-)
5	Photodiode (+)
6	Laser diode (-)
7	Laser diode (+)
8	not connected



User Safety:

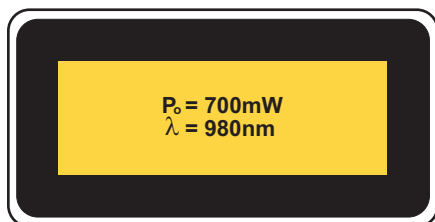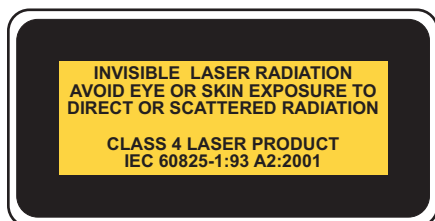

Complies with 21 CFR1040.10

For further information and ordering details please contact Lumics at:

Lumics GmbH
Carl-Scheele-Str. 16
12489 Berlin
Germany

Tel: +49. (0)30. 6 78 06 76 - 0
Fax: +49. (0)30. 6 78 06 76 - 26
Email: infoDE1@lumics.com
www.lumics.com

Rev 081106 / v1
Copyright Lumics GmbH
All rights reserved