




**LU1064Myyy**

**Narrow Linewidth Laser Module**

## Single frequency 1064nm Laser Module

### Features:

- Wavelength selection range 1064+/-1nm
- External cavity laser
- Proven reliability for high power operation
- Cooled 14-pin package
- Very powerful chip design
- Single mode fiber pigtail
- Single frequency (fwhm 30 MHz)
- Linear polarized TEM00

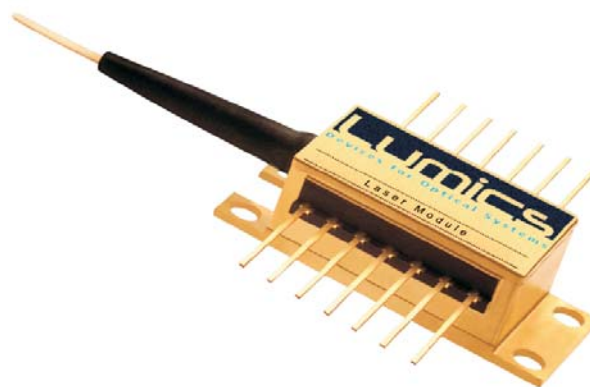

### Description / Applications:

The Lumics LU1064Myyy laser diode module contains an optimized GaAs/AlGaAs/InGaAs quantum well high power laser. It has been specifically designed for narrow linewidth applications. High reliability requirements are achieved through our patented innovative technology, which includes a special facet passivation process. The ISO9001 conform production is based on careful design, exactly defined manufacturing and extensive testing. The qualification contains a set of optoelectronic, thermal and mechanical tests. Each laser diode module is individually serialized for traceability and is shipped with a specified set of test data.



## Characteristics:

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Operating Power (1)	LU1064M150	$P_{op}$	150			mW
	LU1064M200	$P_{op}$	200			mW
Operating Current	LU1064M150	$I_{op}$		330	400	mA
	LU1064M200	$I_{op}$		400	450	mA
Threshold Current		$I_{th}$		35	55	mA
Forward Voltage	at $I_{op}, T_{op}$	$V_{op}$		1.5	1.65	V
Peak Wavelength	at $I_{op}, T_{op}$	$\lambda_{peak}$	1063	1064	1065	nm
Spectral Width (2)	at $I_{op}, T_{op}$	$\lambda_{rms}$		30		MHz
Monitor Responsivity		$I_{resp}$	0.1	0.7	5.0	$\mu A/mW$
Monitor Dark Current		$I_d$	5		40	nA
TEC Current	chip 25°C, case 70°C	$I_c$		0.12	0.9	A
TEC Voltage	chip 25°C, case 70°C	$V_c$			2.1	V
Thermistor Resistance	at T=25°C	$R_{th}$	9.5	10	10.5	Kohm
Wavelength shift with LD current	at T=25°C			1 E-3	1 E-2	nm/mA
Wavelength shift with case temp.					0.02	nm/K
Current range free of mode hopping (1)			10	30	40	mA

(1) operating power shows jumps approx. every 10mA - 40mA in defined power range due to single longitudinal laser mode hopping

(2)  $\lambda_{rms}$  is defined as 95% power is in the central peak defined as  $\pm rms$  in the current free of mode hopping


## Absolute Maximum Ratings:

Parameter	Symbol	Min	Max	Unit
Storage Temp.	$T_{max}$	-40	85	°C
Operating Case Temp.	$T_{op, case}$	-20	70	°C
Operating Chip Temp.	$T_{op, chip}$	20	30	°C
Soldering Temp. (max. 10sec)			260	°C
LD Forward Current	$I_{max}$		500	mA
LD Forward Current	$I_P$ (Pulse 200ns/Period 30 $\mu$ sec)		1.5	A
LD Reverse Voltage	$V_{R,max}$		2	V
Monitor Forward Current	$I_{F,PD}$		5	mA
Monitor Reverse Voltage	$V_{R,PD}$		20	V
TEC Current	$I_{TEC}$		1.8	A
TEC Voltage	$V_{TEC}$		3.2	V
ESD Damage(3)			500	V
Fiber Pigtail Bend Radius	PM980	25		mm
Maximum transient (<3 $\mu$ s) forward current			1.2	A


(3) A standard human body model (1.5kOhm, 1000pF) is used for ESD thresholds



## Module Drawing (dimensions in mm):

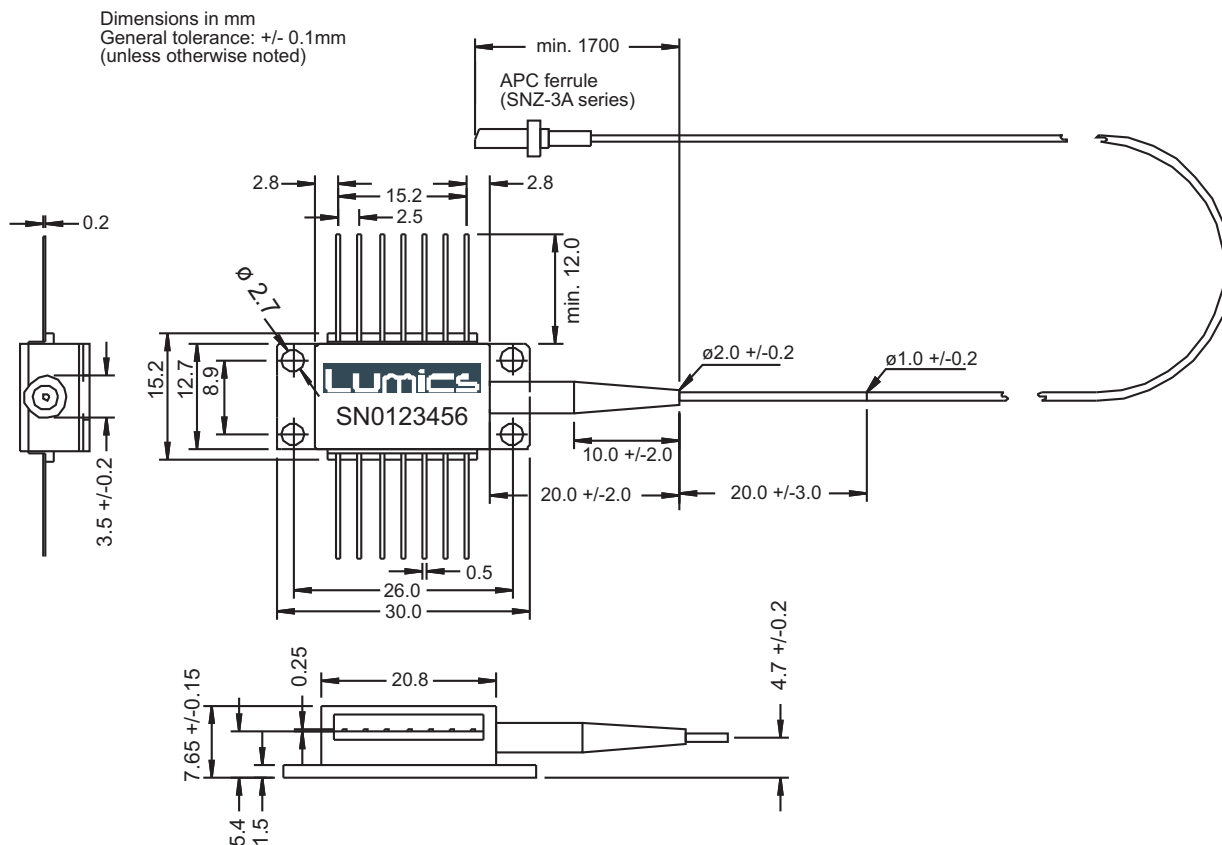



## Pin Connections:

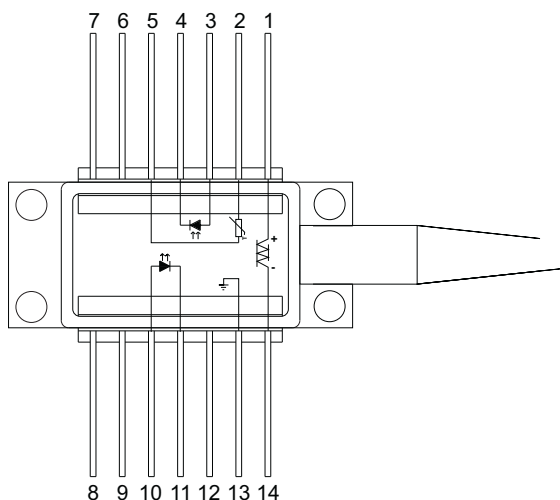

Pin	Function	Pin	Function
1	Cooler (+)	8	nc
2	Thermistor	9	nc
3	PD anode (-)	10	LD anode (+)
4	PD cathode (+)	11	LD cathode (-)
5	Thermistor	12	nc
6	nc	13	Case ground
7	nc	14	Cooler (-)



## User Safety:

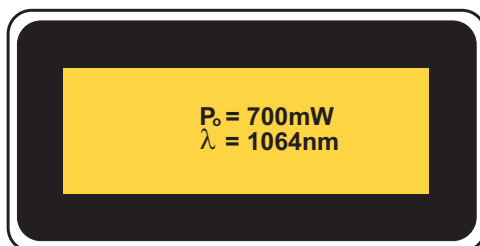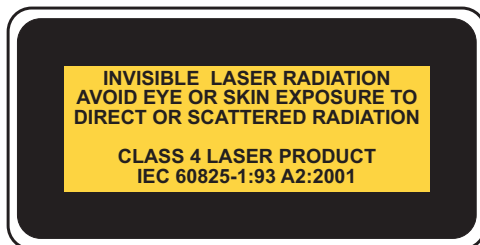

Complies with 21 CFR1040.10

For further information and ordering details please contact Lumics at:

**Lumics GmbH**  
Carl-Scheele-Str. 16  
12489 Berlin  
Germany

Tel: +49. (0)30. 6 78 06 76 - 0  
Fax: +49. (0)30. 6 78 06 76 - 26  
Email: [sales4@lumics.com](mailto:sales4@lumics.com)  
[www.lumics.com](http://www.lumics.com)

Rev 081105 / v1  
Copyright Lumics GmbH  
All rights reserved