


Electrical and Optical Characteristics (Tc = 25°C)

Tc: Case temperature


Item		Symbol	Conditions	Min.	Typ.	Max.	Unit
Threshold current		Ith			50	70	mA
Operating current		Iop	Po = 3mW		60	80	mA
Operating voltage		Vop	Po = 3mW		2.4	3.0	V
Wavelength		λ	Po = 3mW	625	635	645	nm
Radiation angle	Perpendicular	θ_{\perp}	Po = 3mW	24	32	40	degree
	Parallel	$\theta_{//}$		5	7	12	degree
Positional accuracy	Position	$\Delta X, \Delta Y, \Delta Z$	Po = 3mW			± 80	μm
	Angle	$\Delta\phi_{//}$				± 3	degree
		$\Delta\phi_{\perp}$				± 4	degree
Differential efficiency		ηD	Po = 3mW	0.15	0.35	0.8	mW/mA
Astigmatism		As	$ Z_{//} - Z_{\perp} $			20	μm
Monitor current		I _{mon}	Po = 3mW, Vr = 5V	0.05	0.10	0.30	mA

Example of Representative Characteristics


Optical power output vs. Forward current characteristics
Optical power output vs. Monitor current characteristics

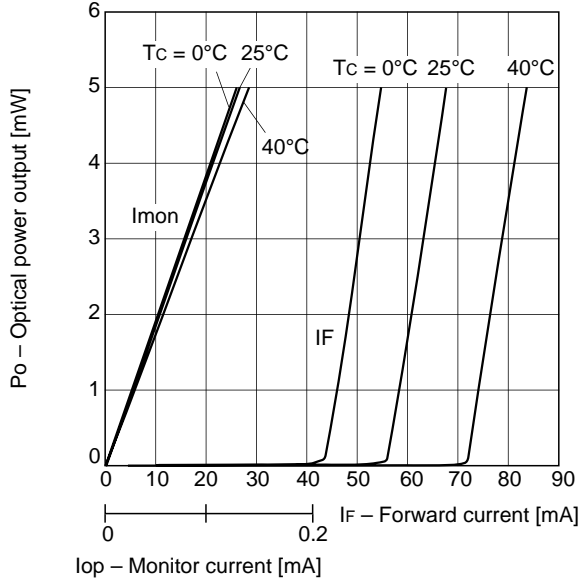


Far field pattern (FFP)

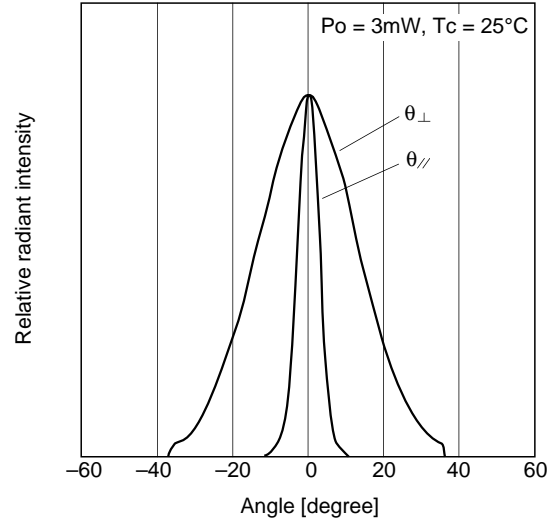


Threshold current vs. Temperature characteristics

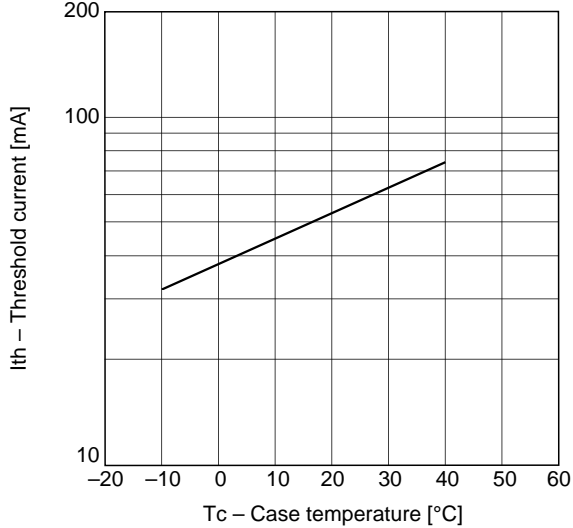


Monitor current vs. Temperature characteristics

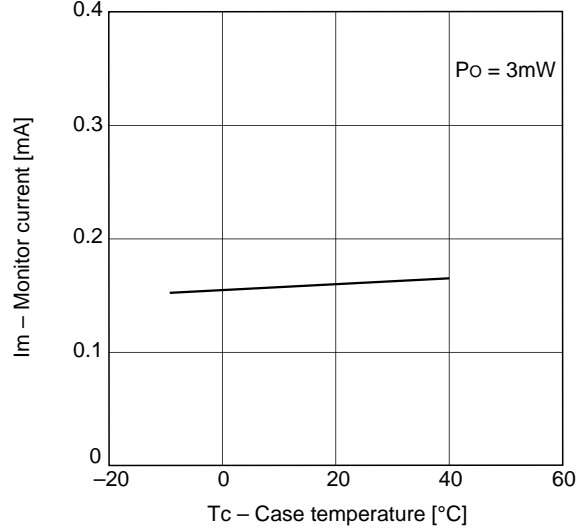

Temperature dependence of spectrum

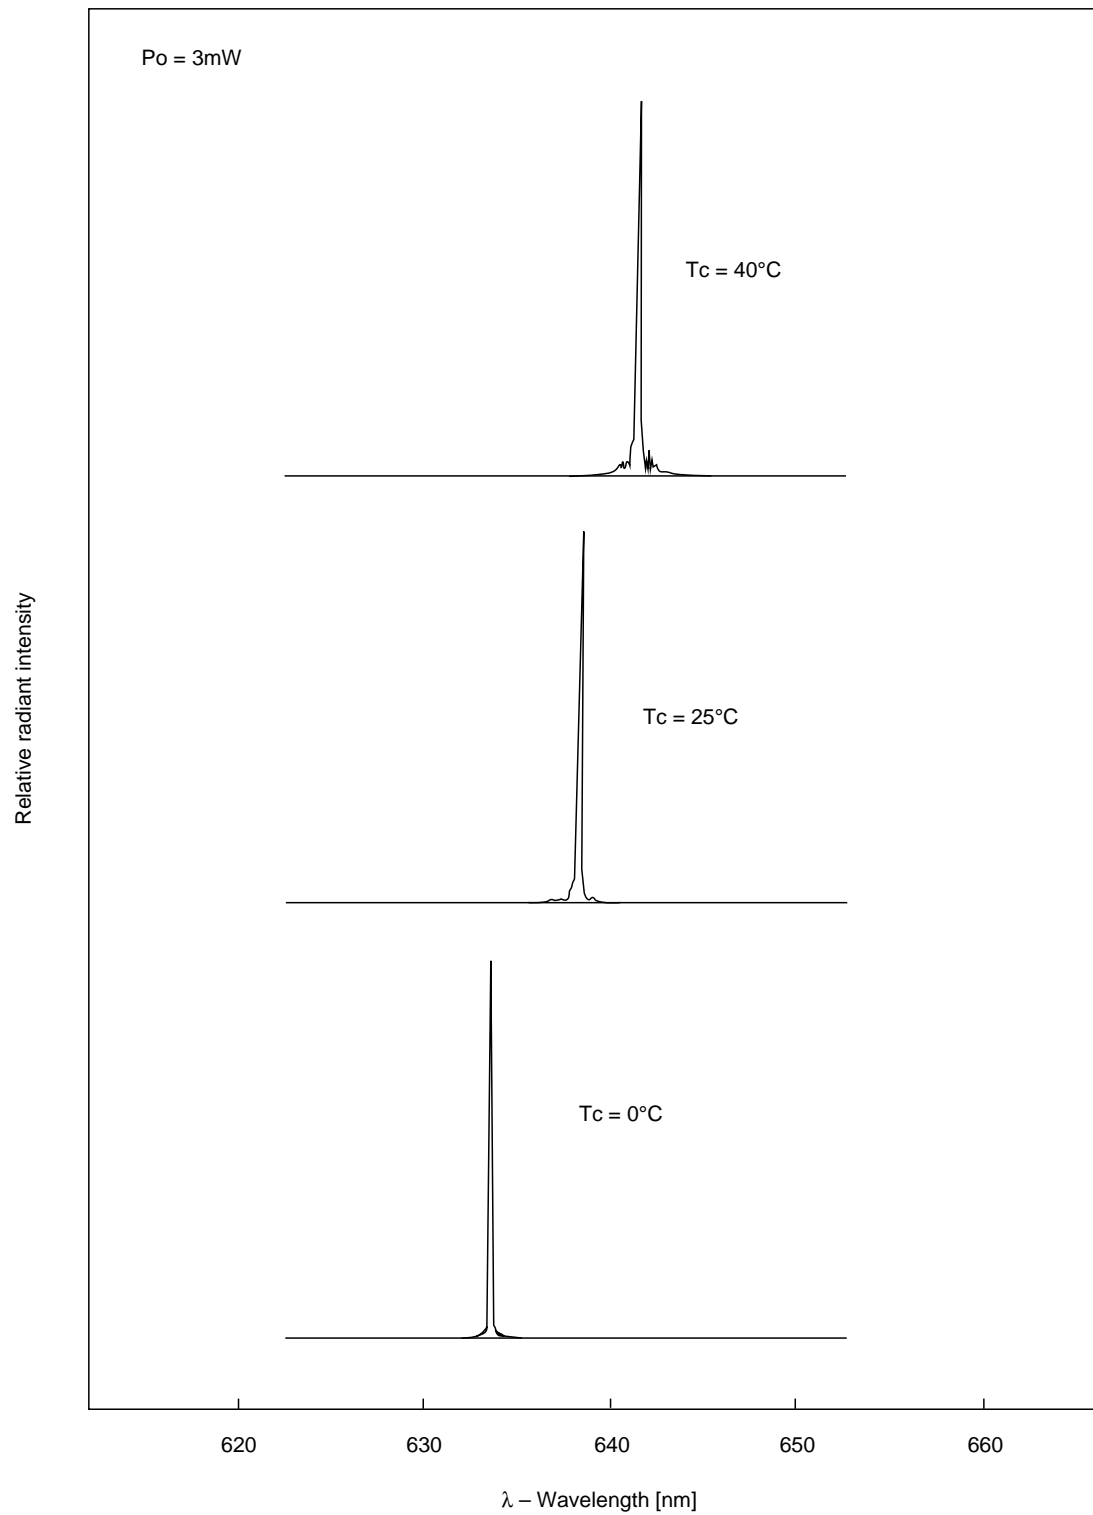


Power dependence of spectrum

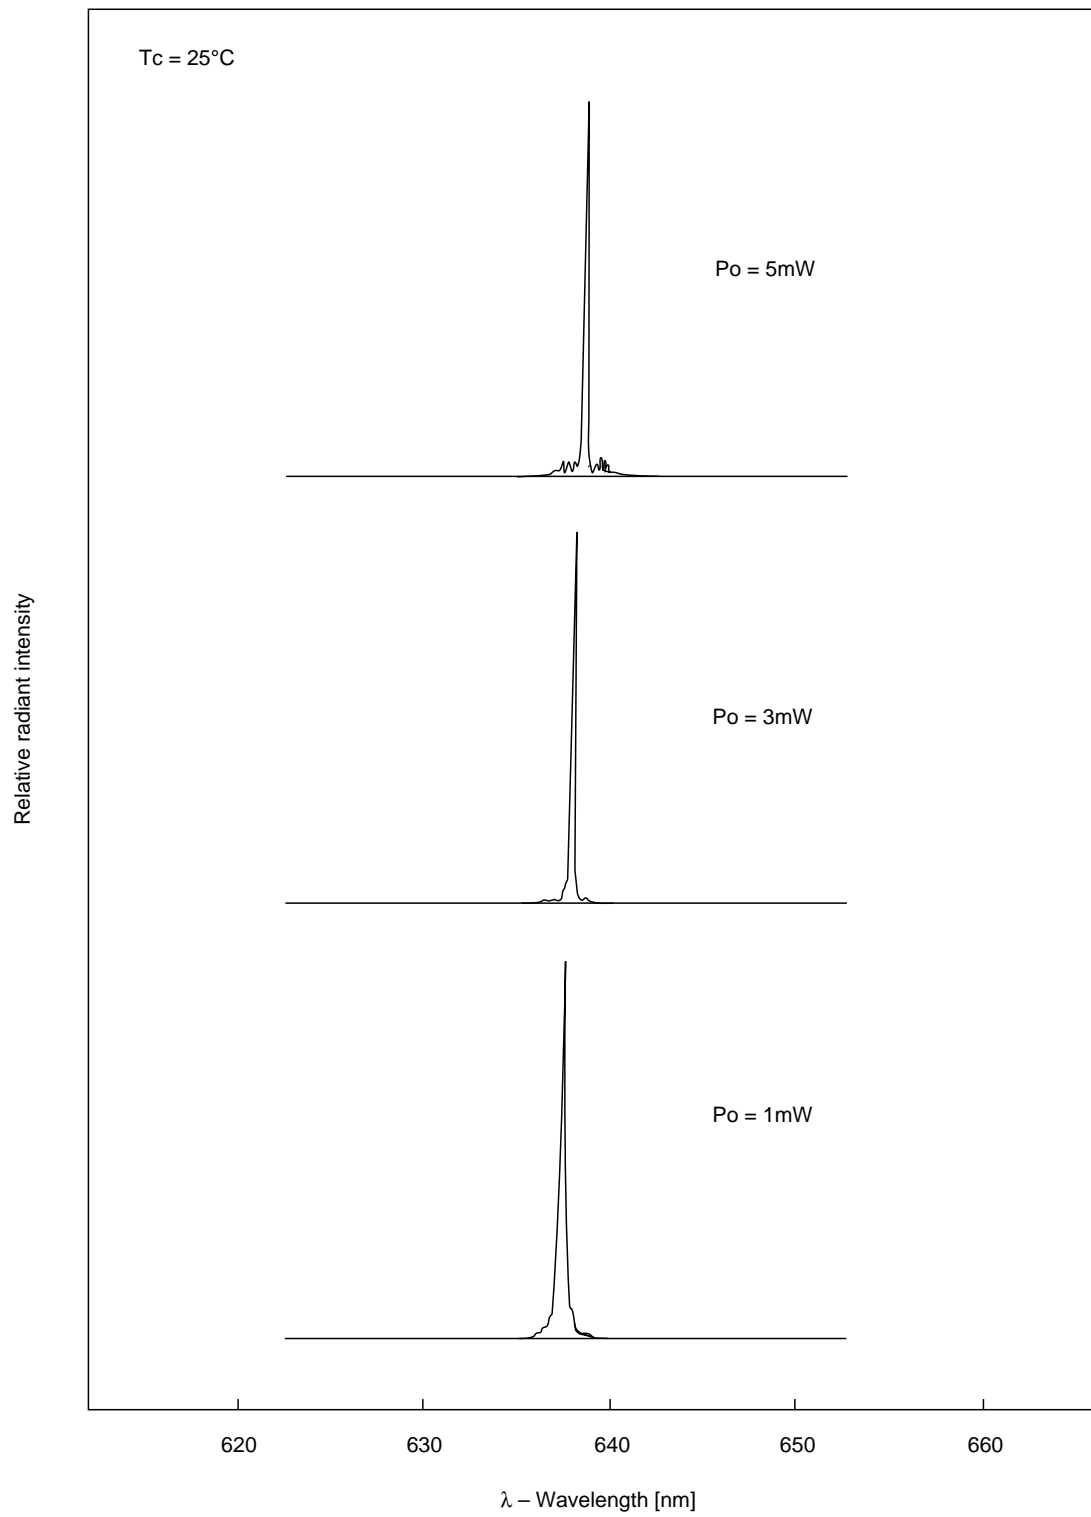

Notes on Operation

Care should be taken for the following points when using this product.

- (1) This product corresponds to a Class 3B product under IEC60825-1 and JIS standard C6802 "Laser Product Emission Safety Standards".

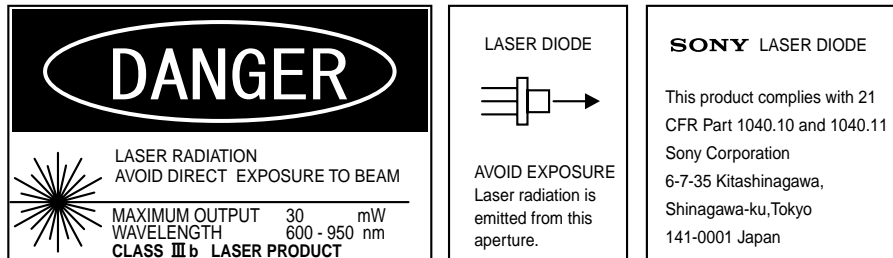

- (2) Eye protection against laser beams

Take care not to allow laser beams to enter your eyes under any circumstances.

For observing laser beams, ALWAYS use safety goggles that block laser beams. Usage of IR scopes, IR cameras and fluorescent plates is also recommended for monitoring laser beams safely.

- (3) Gallium Arsenide

This product uses gallium arsenide (GaAs). This is not a problem for normal use, but GaAs vapors may be potentially hazardous to the human body. Therefore, never crush, heat to the maximum storage temperature or higher, or place the product in your mouth.

In addition, the following disposal methods are recommended when disposing of this product.

1. Engaging the services of a contractor certified in the collection, transport and intermediate treatment of items containing arsenic.
2. Managing the product through to final disposal as specially managed industrial waste which is handled separately from general industrial waste and household waste.

- (4) Prevention of surge current and electrostatic discharge


Laser diodes are most sensitive to electrostatic discharge among semiconductors. When a large current is passed through the laser diode for even an extremely short time, the strong light emitted from the laser diode promotes deterioration and then destruction of the laser diode. Therefore, note that surge current should not flow to the laser diode driving circuit from switches and others. Also, if the laser diode is handled carelessly, it may be destroyed instantly because electrostatic discharge is easily applied by a human body. Therefore, be extremely careful about overcurrent and electrostatic discharge.

- (5) Use for special applications

This product is not designed or manufactured for use in equipment used under circumstances where failure may pose a risk to life and limb, or result in significant material damage, etc.

Consult your Sony sales representative when investigating use for medical, vehicle, nuclear power control or other special applications. Also, use the power supply that was designed not to exceed the optical power output specified at the absolute maximum ratings.

Package Outline Unit: mm

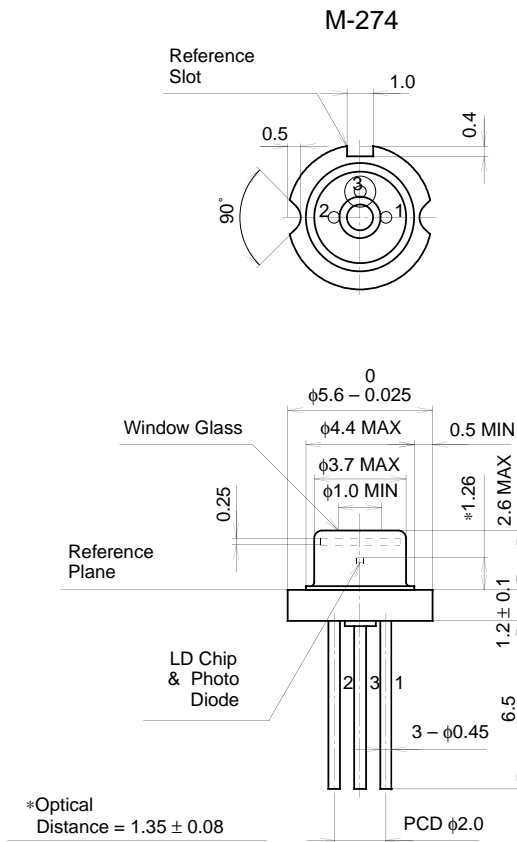

SONY CODE	M-274
EIAJ CODE	_____
JEDEC CODE	_____

PACKAGE MASS	0.3g
--------------	------