



**T835-600G**  
**T850-600G**

## HIGH PERFORMANCE TRIAC

### FEATURES


HIGH COMMUTATION PERFORMANCES  
 SNUBBERLESS™ TECHNOLOGY  
 HIGH NOISE IMMUNITY (dV/dt)  
 HIGH I<sub>TSM</sub>

### DESCRIPTION

The T835-600G and T850-600G triacs are using high performance SNUBBERLESS technology.

They are intended for AC control applications using surface mount technology.

These devices are perfectly suited where high commutation and surge performances are required.

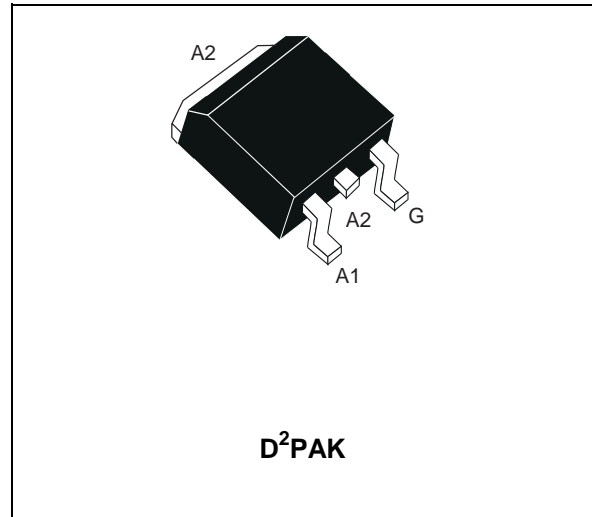

### ABSOLUTE RATINGS (limiting values)

Symbol	Parameter	Value	Unit
V <sub>DRM</sub> V <sub>RRM</sub>	Repetitive peak off-state voltage	T <sub>j</sub> = 125°C	600 V
I <sub>T(RMS)</sub>	RMS on-state current (360° conduction angle)	T <sub>c</sub> = 110°C	8 A
I <sub>TSM</sub>	Non repetitive surge peak on-state current (T <sub>j</sub> initial = 25°C)	t <sub>p</sub> = 8.3ms	85 A
		t <sub>p</sub> = 10 ms	80
I <sup>2</sup> t	I <sup>2</sup> t Value for fusing	t <sub>p</sub> = 10 ms	32 A <sup>2</sup> s
di/dt	Critical rate of rise of on-state current I <sub>G</sub> = 500 mA    di <sub>G</sub> /dt = 1 A/μs.	Repetitive F = 50 Hz	20 A/μs
		Non Repetitive	100
T <sub>stg</sub> T <sub>j</sub>	Storage temperature range Operating junction temperature range		- 40, + 150 - 40, + 125 °C
T	Maximum temperature for soldering during 10s		260 °C

## T835-600G / T850-600G

### THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
Rth(j-a)	Junction to ambient (S = 1 cm <sup>2</sup> )	45	°C/W
Rth(j-c)	Junction to case for DC	2.1	°C/W
Rth(j-c)	Junction to case for AC 360° conduction angle (F=50Hz)	1.6	°C/W

### GATE CHARACTERISTICS (maximum values)


$P_{G(AV)} = 1 \text{ W}$   $P_{GM} = 10 \text{ W}$  ( $t_p = 20 \mu\text{s}$ )  $I_{GM} = 4 \text{ A}$  ( $t_p = 20 \mu\text{s}$ )

### ELECTRICAL CHARACTERISTICS


Symbol	Test Conditions		Quadrant		T835	T850	Unit
$I_{GT}$	$V_D = 12\text{V (DC)}$ $R_L = 33\Omega$	$T_j = 25^\circ\text{C}$	I-II-III	MIN	2		mA
				MAX	35	50	
$V_{GT}$	$V_D = 12\text{V (DC)}$ $R_L = 33\Omega$	$T_j = 25^\circ\text{C}$	I-II-III	MAX	1.3		V
$V_{GD}$	$V_D = V_{DRM}$ $R_L = 3.3\text{k}\Omega$	$T_j = 125^\circ\text{C}$	I-II-III	MIN	0.2		V
$I_H^*$	$I_T = 100\text{mA}$ Gate open	$T_j = 25^\circ\text{C}$		MAX	35	50	mA
$I_L$	$I_G = 1.2 I_{GT}$	$T_j = 25^\circ\text{C}$	I-III	MAX	50	60	mA
			II	MAX	80	100	
$V_{TM}^*$	$I_{TM} = 11\text{A}$ $t_p = 380\mu\text{s}$	$T_j = 25^\circ\text{C}$		MAX	1.5		V
$I_{DRM}$	$V_D = V_{DRM}$	$T_j = 25^\circ\text{C}$		MAX	5		$\mu\text{A}$
$I_{RRM}$	$V_R = V_{RRM}$	$T_j = 125^\circ\text{C}$		MAX	2		mA
$dV/dt^*$	Linear slope up to $V_D = 67\% V_{DRM}$ Gate open	$T_j = 125^\circ\text{C}$		MIN	500	1000	$\text{V}/\mu\text{s}$
$(dI/dt)_c^*$	Without snubber	$T_j = 125^\circ\text{C}$		MIN	4.5	7	A/ms

\* For either polarity of electrode A2 voltage with reference to electrode A1.


### ORDERING INFORMATION Add "-TR" suffix for Tape & Reel shipment

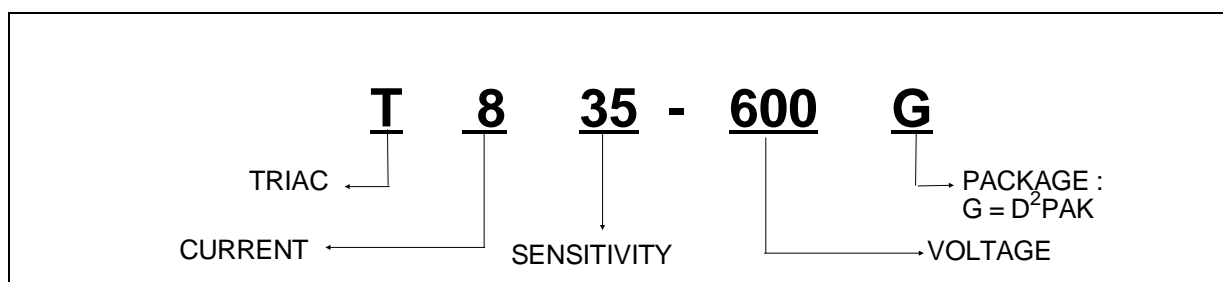


**Fig. 1:** Maximum power dissipation versus RMS on-state current.

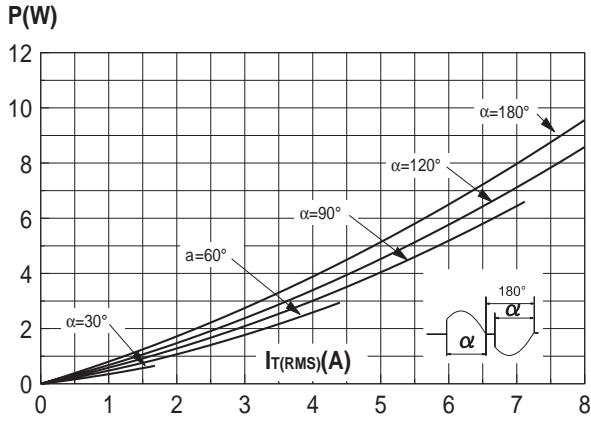


**Fig. 3:** RMS on-state current versus case temperature.

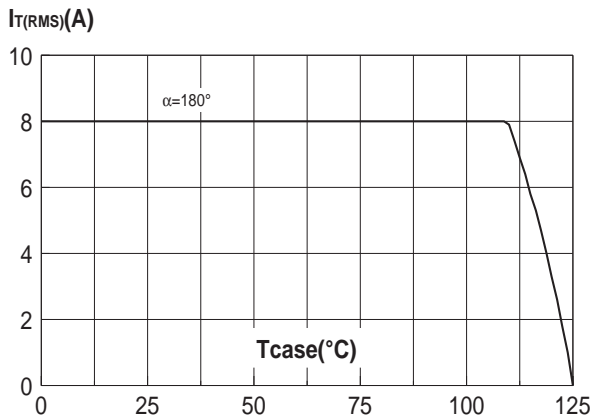


**Fig. 5:** Relative variation of gate trigger current and holding current versus junction temperature (typical values).

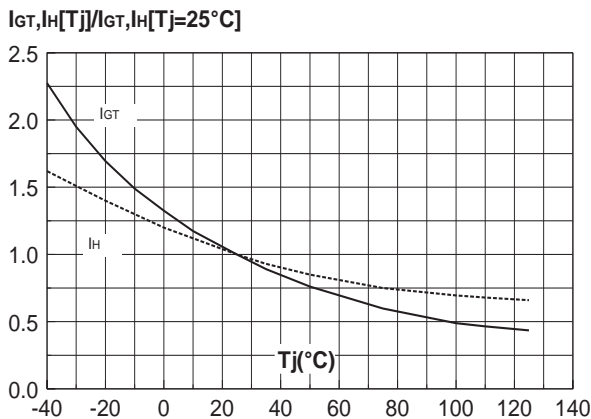


**Fig. 2:** Correlation between maximum power dissipation and maximum allowable temperatures ( $T_{amb}$  and  $T_{case}$ ) for different thermal resistances heatsink+contact.

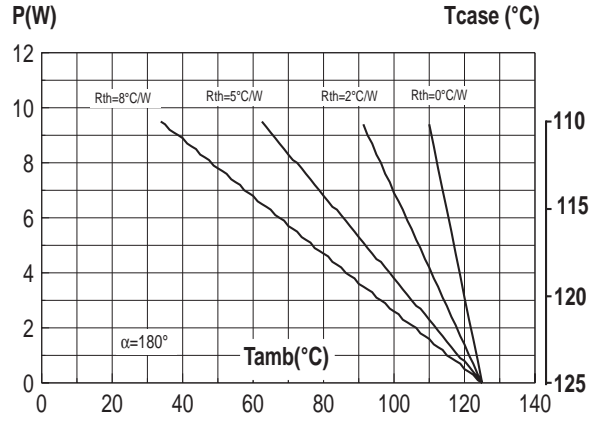


**Fig. 4 :** Relative variation of thermal impedance versus pulse duration.

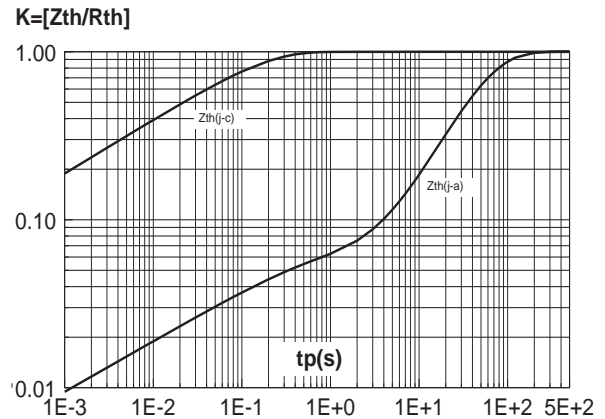


**Fig. 6:** Non repetitive surge peak on-state current versus number of cycles.

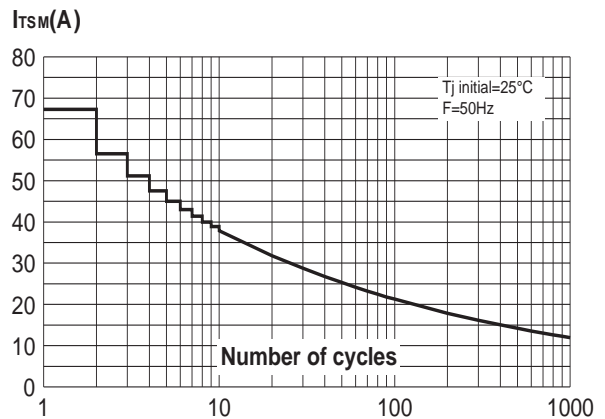


**Fig. 7:** Non repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 10\text{ms}$ , and corresponding value of  $I^2t$ .

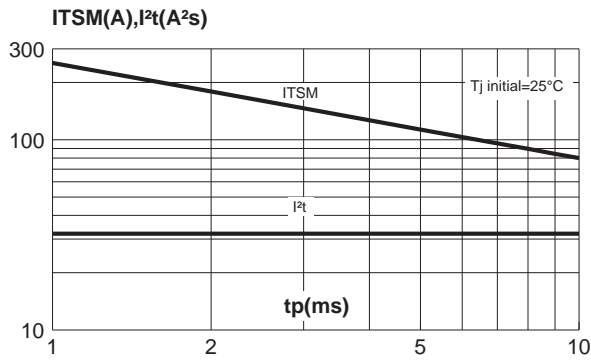


**Fig. 9:** Thermal resistance junction to ambient versus copper surface under tab (Epoxy printed circuit board FR4, copper thickness:  $35\mu\text{m}$ ).

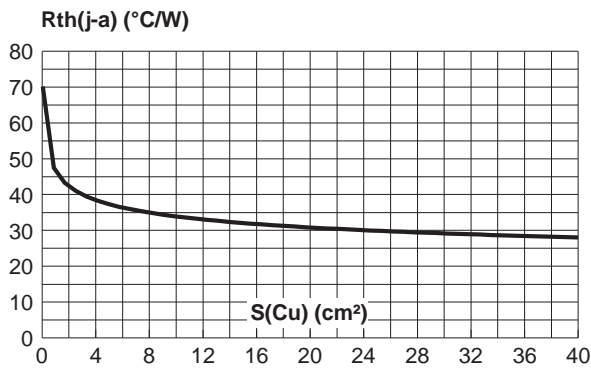


**Fig. 8:** On-state characteristics (maximum values).

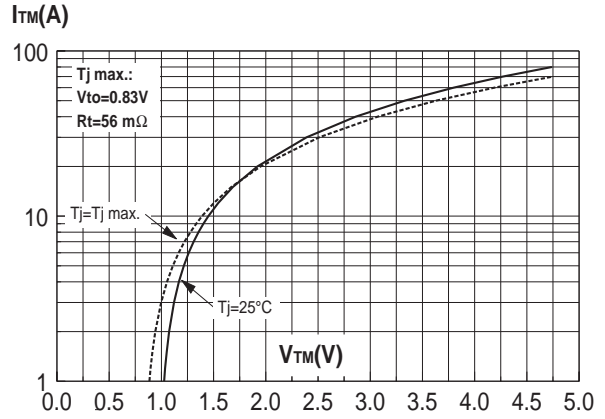


**Fig. 10:** Typical reflow soldering heat profile, either for mounting on FR4 or metal-backed boards.

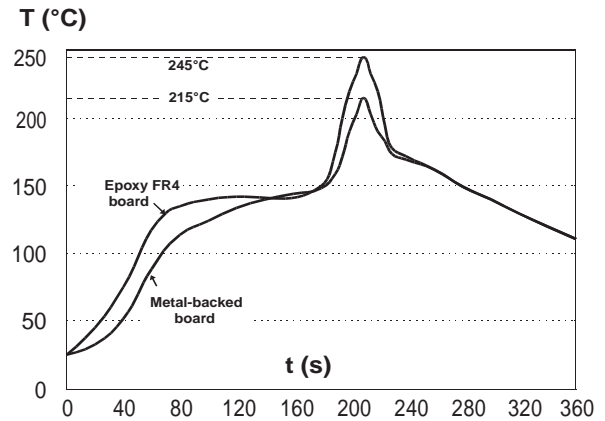

**PACKAGE MECHANICAL DATA**  
D<sup>2</sup>PAK

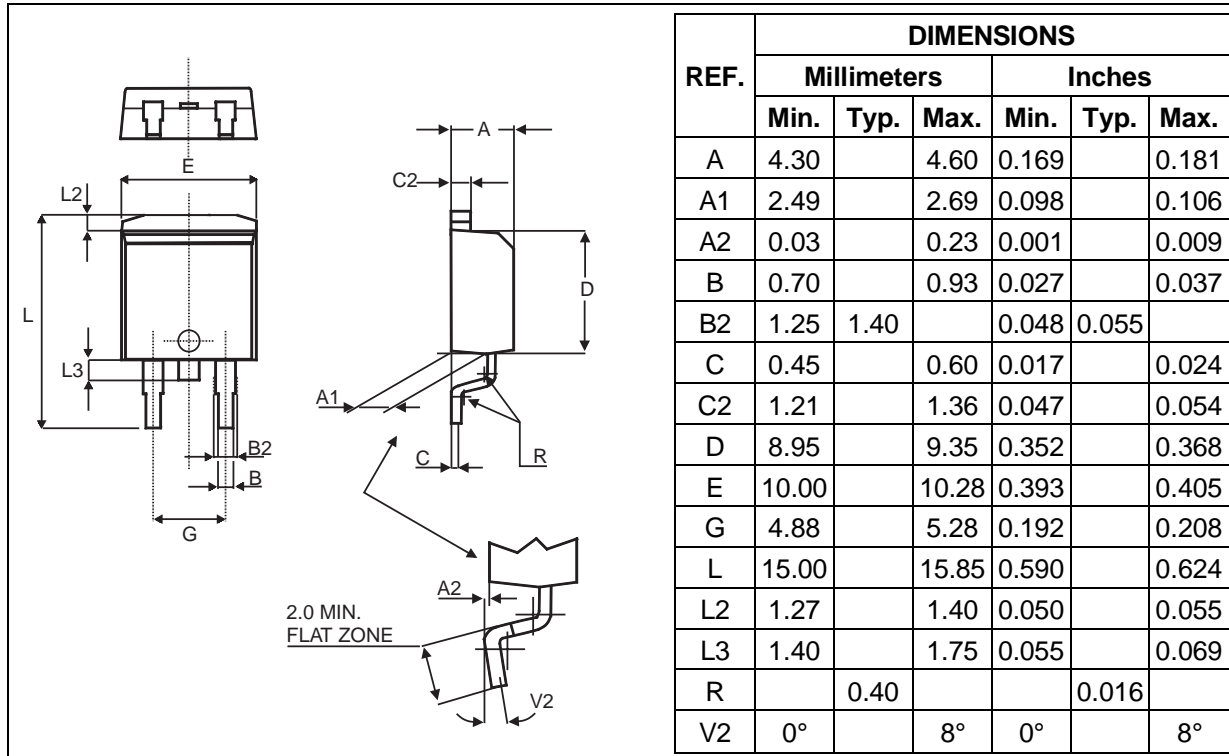

**FOOT PRINT DIMENSIONS (in millimeters)**

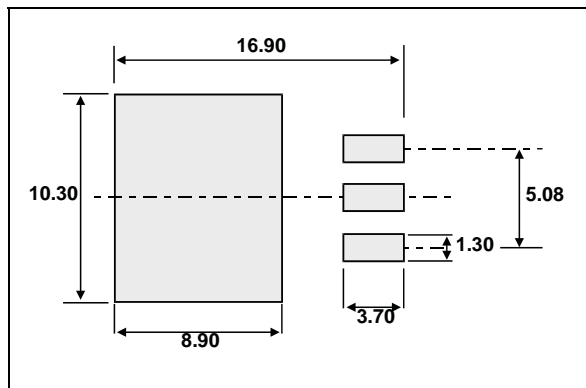

**MARKING**

TYPE	MARKING
T835-600G	T835 600G
T850-600G	T850 600G

**PACKING**

Tube : 50 units  
Tape and reel : 500 units

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 1998 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.