




BIPOLAR DUAL OPERATIONAL AMPLIFIERS

- LOW DISTORTION RATIO
- LOW NOISE
- VERY LOW SUPPLY CURRENT
- LOW INPUT OFFSET CURRENT
- VERY LOW INPUT OFFSET VOLTAGE
- LARGE COMMON-MODE RANGE
- HIGH GAIN
- HIGH OUTPUT CURRENT
- GAIN-BANDWIDTH PRODUCT : 2.5 MHz
- TEMPERATURE DRIFT : $2 \mu\text{V}/^\circ\text{C}$
- LONG TERM STABILITY : $8 \mu\text{V}/\text{YEAR}$
(for $T_{\text{amb}} \leq 50^\circ\text{C}$)
- THE TEB1033 AND TEF1033 ARE PIN TO PIN REPLACEMENT OF THE LS204C AND LS204 RESPECTIVELY

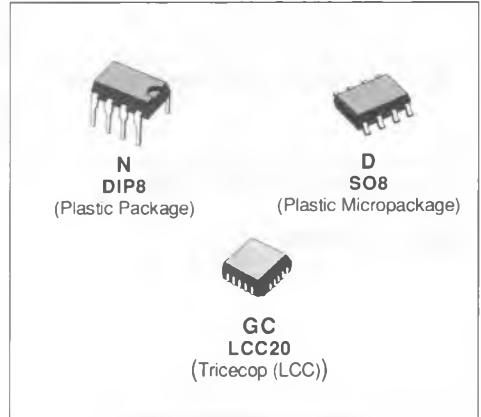

DESCRIPTION

The TEB1033, TEF1033 and TEC1033 are high performance dual-operational amplifiers intended for active filter applications. The internal phase compensation allows stable operation as voltage follower in spite of their high gain-bandwidth products.

The circuits present very stable electrical characteristics over the entire supply voltage range.


ORDER CODES

Part Number	Temperature Range	Package		
		N	D	GC
TEB1033	0°C to $+70^\circ\text{C}$	•	•	
TEF1033	-40°C to $+105^\circ\text{C}$	•	•	
TEC1033	-55°C to $+125^\circ\text{C}$			•

Examples : TEB1033N, TEC1033GC


PIN CONNECTIONS (top views)

DIP8/SO8



- 1 - Output 1
- 2 - Inverting input 1
- 3 - Non-inverting input 1
- 4 - V_{CC}
- 5 - Non-inverting input 2
- 6 - Inverting input 2
- 7 - Output 2
- 8 - V_{CC}

LCC20




- 1 - NC
- 2 - Output 1
- 3 - NC
- 4 - NC
- 5 - Inverting input 1
- 6 - NC
- 7 - Non-inverting input 1
- 8 - NC
- 9 - NC
- 10 - V_{CC}
- 11 - NC
- 12 - Non-Inverting input 2
- 13 - NC
- 14 - NC
- 15 - Inverting Input 2
- 16 - NC
- 17 - Output 2
- 18 - NC
- 19 - NC
- 20 - V_{CC}

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V _{CC}	Supply Voltage	± 18	V
V _I	Input Voltage	± V _{CC}	V
V _{ID}	Differential Input Voltage	± (V _{CC} - 1)	V
P _{tot}	Power Dissipation	TEB1033D, TEF1033D TEB1033N TEC1033GC 400 665 665	mW
T _{oper}	Operating Free-air Temperature Range	TEB1033 TEF1033 TEC1033 0 to + 70 - 40 to + 105 - 55 to + 125	°C
T _{stg}	Storage Temperature Range	- 55 to + 150	°C

BLOCK DIAGRAM

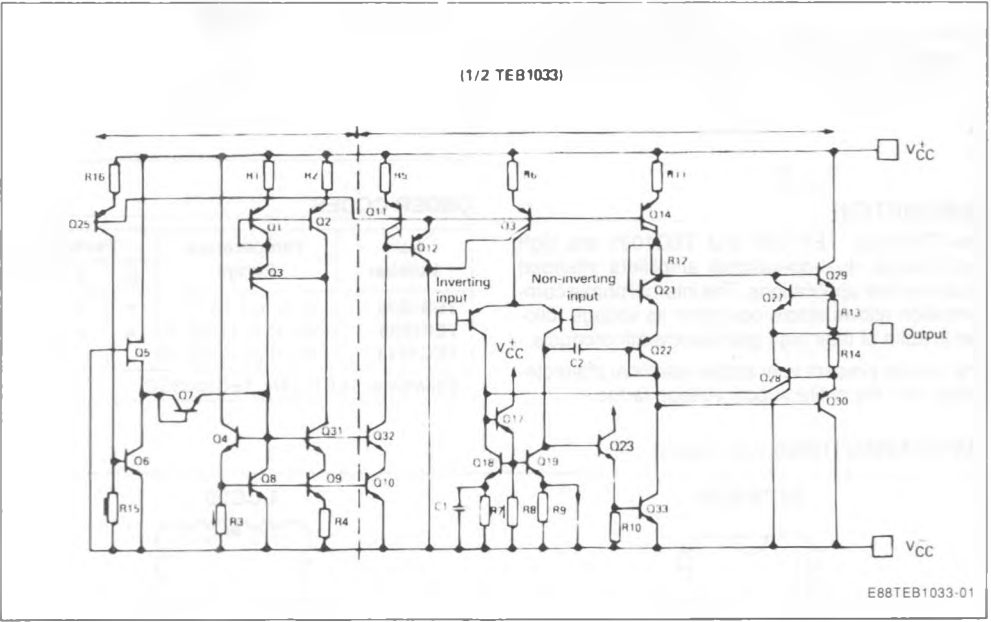

Case	Outputs	Inverting Inputs	Non-inverting Inputs	V _{CC}	V _{CC}	N. C.
DIP8 SO8	1, 7	2, 6	3, 5	8	4	
LCC20	2, 17	5, 15	7, 12	20	10	*

* LCC20 : Other pins are not connected.


ELECTRICAL CHARACTERISTICS

 $V_{CC} = \pm 15$ V (unless otherwise specified)**TEC 1033** : $-55 \leq T_{amb} \leq +125$ °C**TEF 1033** : $-40 \leq T_{amb} \leq +105$ °C**TEB 1033** : $0 \leq T_{amb} \leq +70$ °C

Symbol	Parameter	TEB 1033 TEF 1033 TEC 1033			Unit
		Min.	Typ.	Max.	
V_{IO}	Input Offset Voltage $T_{amb} = 25$ °C ($R_S \leq 10$ k Ω) $T_{min} \leq T_{amb} \leq T_{max}$		0.3	1 3	mV
DV_{IO}	Input Offset Voltage Drift		2		μ V/°C
I_{IO}	Input Offset Current $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$		5	20 40	nA
I_{IB}	Input Bias Current $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$		50	100 200	nA
A_{vd}	Large Signal Voltage Gain ($R_L = 2$ k Ω , $V_O = \pm 10$ V) $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$	100 100	300		V/mV
SVR	Supply Voltage Rejection Ratio DV_{CC} from ± 15 V to ± 4 V $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$	100 100	110		dB
I_{CC}	Supply Current, all Amp, no Load $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$		1	1.5 2	mA
V_I	Input Voltage Range $T_{amb} = 25$ °C	- 12		+ 12	V
CMR	Common Mode Rejection Ratio ($R_S \leq 10$ k Ω , $V_I = \pm 10$ V) $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$	100 100	110		dB
I_{OS}	Output Short-circuit Current $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$	10 10	23	40 40	mA
$\pm V_{opp}$	Output Voltage Swing $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$ $V_{CC} = \pm 4$ V, $R_L = 2$ k Ω $V_{CC} = \pm 6$ V, $R_L = 600$ Ω	13 12 2.8 4.6	14 3		V
S_{vo}	Slew-rate ($V_I = \pm 10$ V, $R_L = 2$ k Ω , $C_L \leq 100$ pF, $T_{amb} = 25$ °C, unity gain)	0.6	1	3	V/ μ s
GBP	Gain Bandwidth Product ($f = 100$ KHz, $T_{amb} = 25$ °C, $V_{IN} = 10$ mV, $R_L = 2$ k Ω , $C_L = 100$ pF)	1.8	2.5	3.2	MHz
R_I	Input Resistance ($T_{amb} = 25$ °C)		1		M Ω


ELECTRICAL CHARACTERISTICS(continued)

Symbol	Parameter	TEB 1033 TEF 1033 TEC 1033			Unit
		Min.	Typ.	Max.	
THD	Total Harmonic Distortion (f = 1KHz, A _v = 20 dB, R _L = 2 kΩ C _L ≤ 100 pF, T _{amb} = 25 °C, V _o = 2 V _{pp})		0.008	0.05	%
V _n	Equivalent Input Noise Voltage (f = 1 KHz) R _S = 50 Ω R _S = 1 kΩ R _S = 10 kΩ		8 10 18	15	nV/√Hz
V _{OPP}	Large Signal Voltage Swing R _L =10 kΩ, f = 10 KHz	26	28		V
φM	Phase Margin		45		Degrees
V _{o1} /V _{o2}	Channel Separation	100	120		dB

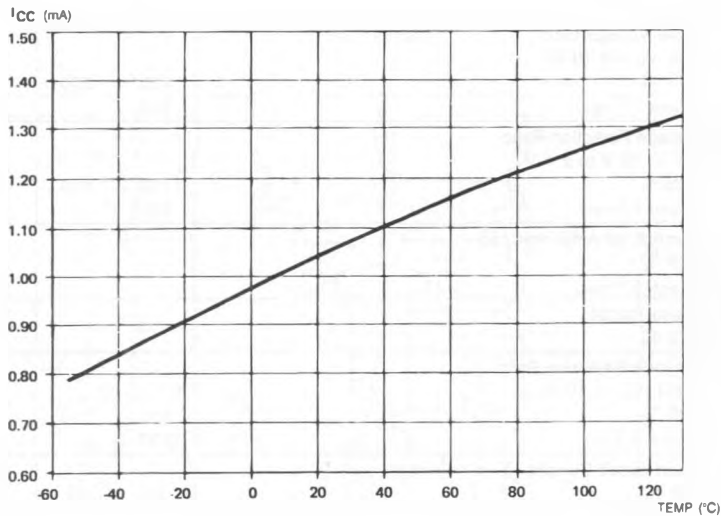


SUPPLY CURRENT VS. AMBIENT TEMPERATURE

E88TEB1033-02

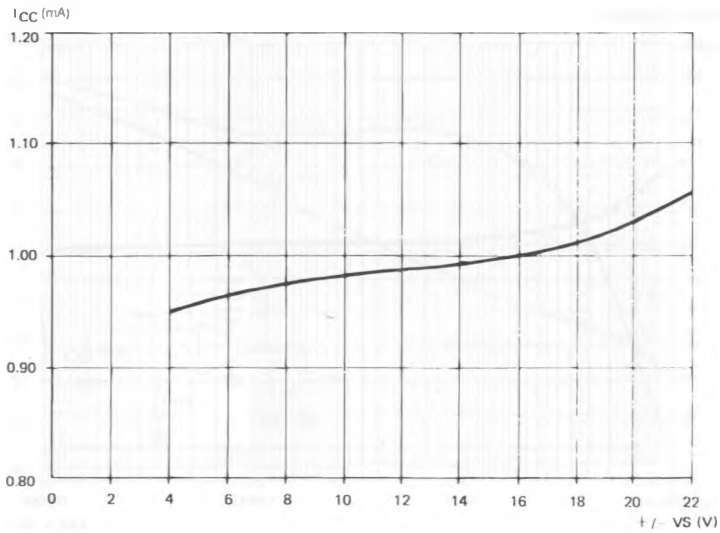


SUPPLY CURRENT VS. SUPPLY VOLTAGE

E88TEB1033 03

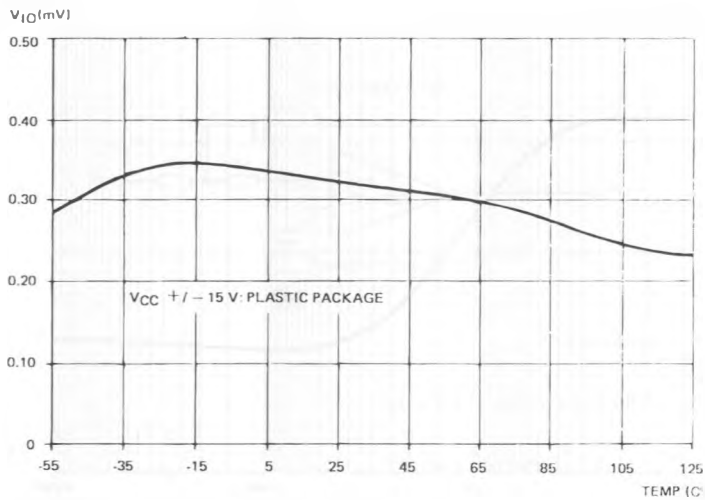


OFFSET VOLTAGE VS. AMBIENT TEMPERATURE

E88TEB1033 04

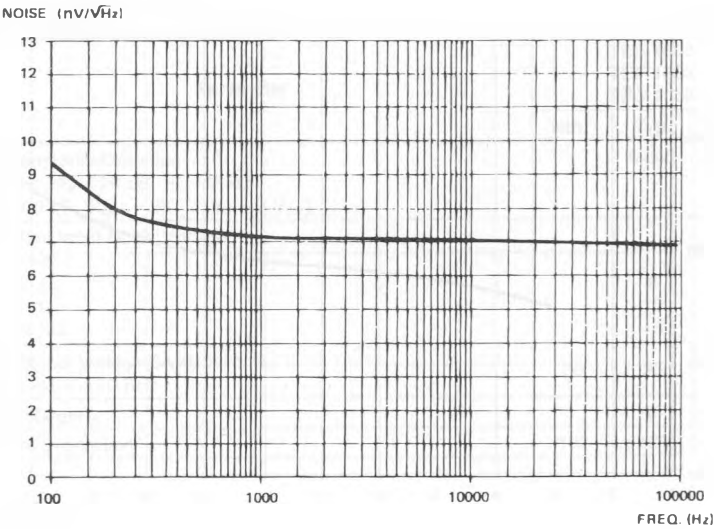


TOTAL INPUT NOISE VS. FREQUENCY

E88TEB1033-05

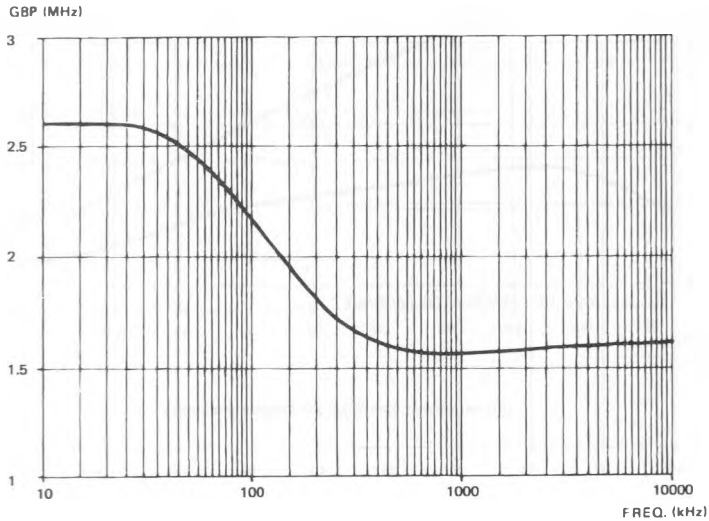

GAIN BANDWIDTH PRODUCT VS. FREQUENCY


E88TEB1033-06

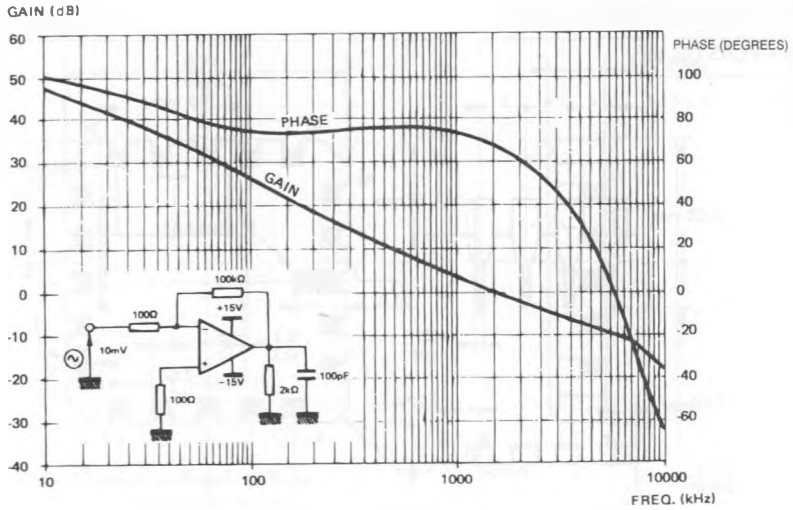

BODE PLOT

E88TEB1033-07

TYPICAL APPLICATION

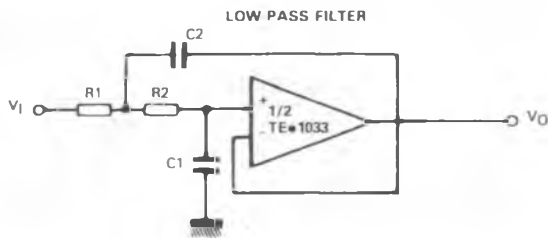

E88TEB1033-08

$$\frac{V_o}{V_i} = \frac{1}{1 + 2\xi \frac{s}{\omega_c} + \frac{s^2}{\omega_c^2}}$$

 $\omega_c = 2\pi f_c$, with f_c = cut-off frequency

 ξ = damping factor

20 PINS – TRICECOP (LCC)

