
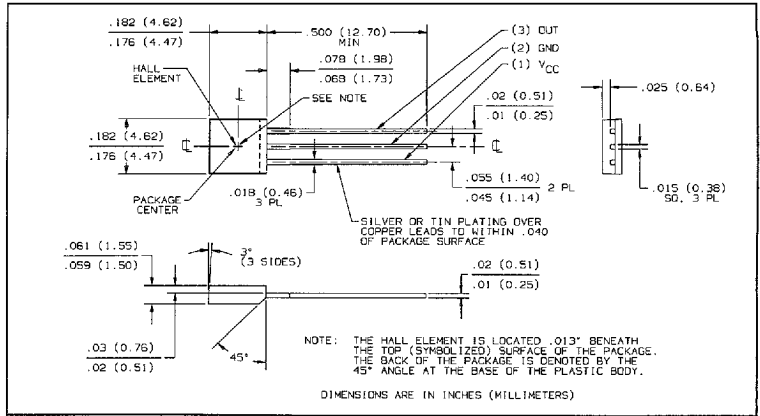


Hallogic® Hall Effect Sensors

Types OHN3030U, OHS3030U

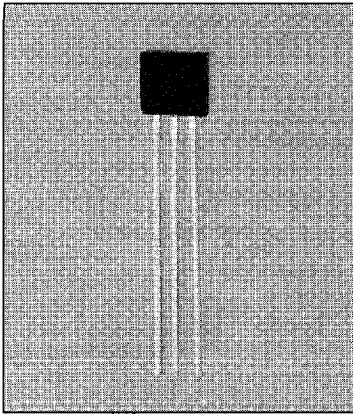

Features

- Operates over a broad range of supply voltages
- Excellent temperature stability to operate in harsh environments
- Drive capability up to 7 TTL loads
- Hall element, linear amplifier, and Schmitt trigger on a single Hallogic® silicon chip

Description

The OHN3030U and OHS3030U each contain a monolithic integrated circuit which incorporates a Hall element, a linear amplifier, and Schmitt trigger on a single silicon chip. Included on-chip is a bandgap voltage regulator to allow operation with a wide range of supply voltages. The devices feature logic level output and provides up to 21 mA of sink current. This allows direct driving of more than 7 TTL loads or any standard logic family using power supplies ranging from 4.5 to 24 volts. Output amplitude is constant at switching frequencies from DC to over 200 kHz.

Stability of the magnetic operate and release points is excellent over this entire temperature range.


Package size has been kept to minimum, providing an advantage in applications where space is limited.

Absolute Maximum Ratings (TA = 25°C unless otherwise noted)

Supply Voltage, VCC	25 V
Storage Temperature Range, TS	-65°C to +160°C
Operating Temperature Range, TA	OHN3030U -20°C to +85°C
	OHS3030U -40°C to +125°C
Lead Soldering Temperature [1/8 inch (3.2 mm) from case for 5 sec. with soldering iron]	260°C (1)
Output ON Current, ISINK	25 mA
Output OFF Voltage, VOUT	25 V
Magnetic Flux Density, B	Unlimited

Note:
(1) Heat sink leads during hand soldering.

Functional Block Diagram

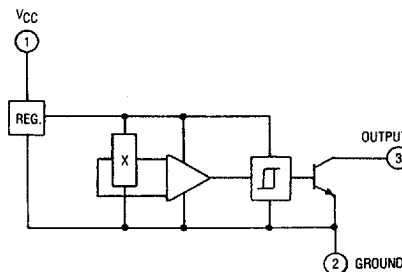

6798580 0002887 997






Types OHN3030U, OHS3030U

Electrical Characteristics ($V_{CC} = 4.5\text{ V to }24\text{ V}$, $T_A = 25^\circ\text{ C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
B _{OP}	Magnetic Operate Point ⁽²⁾		205	250	Gauss	
B _{RP}	Magnetic Release Point	0	160		Gauss	
B _H	Magnetic Hysteresis	20	45		Gauss	
I _{CC}	Supply Current		4	7	mA	$V_{CC} = 24\text{ V}$, Output Off
V _{OL}	Output Saturation Voltage		100	400	mV	$V_{CC} = 4.5\text{ V}$, I _{OL} = 20 mA, B ≥ 200 Gauss
I _{OH}	Output Leakage Current		0.1	10.0	μA	$V_{CC} = 24\text{ V}$, V _{OUT} = 24 V, B ≤ 50 Gauss
t _r	Output Rise Time		0.21	1.00	μs	R _L = 820 Ω, C _L = 20 pF
t _f	Output Fall Time		0.25	1.00	μs	


(2) South pole facing symbolized surface.

Typical Performance Curves

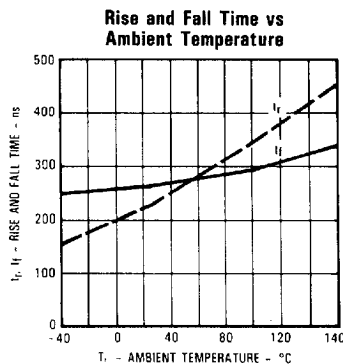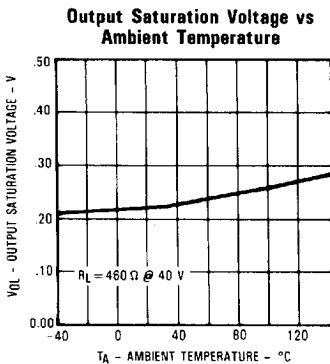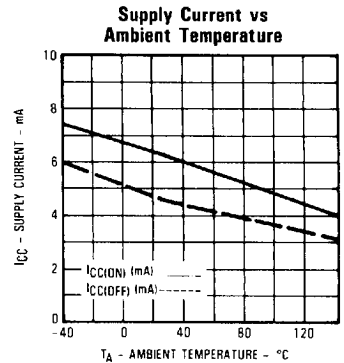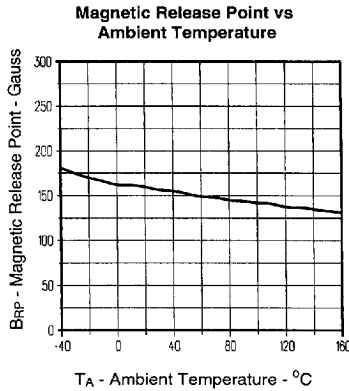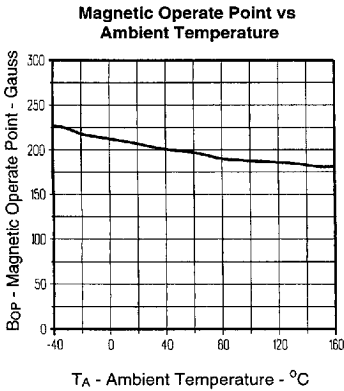


Rise and Fall Time Tests

Magnetic Field vs Output Voltage



Rise and Fall Time Test Circuit



6798580 0002888 823

Optek reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Optek Technology, Inc. 1215 W. Crosby Road Carrollton, Texas 75006 (972)323-2200 Fax (972)323-2396